

SilverLineTM

ISO 9001 Certified

Test Cables

Coax Test Cables for:

- *High Volume Production Test Stations*
- *Research & Development Labs*
- *Environmental & Temperature Test Chambers*
- *Replacement for OEM Test Port Cables*
- *Field RF Testing*
- *Cellular Infrastructure Site Testing*




SilverLineTM Test Cables are cost effective, durable, high-performance cable assemblies designed for use in a broad range of test and interconnect applications. Fabricated from rugged, solid PTFE dielectric cable with stainless steel connectors and a proven strain relief system, these cables provide long life and excellent stability in applications where they are repeatedly flexed and mated/unmated. SilverLineTM test cables are ideal for use in production, field and laboratory test environments. They are also economical enough to be used as interconnects in test systems.

Features & Benefits:

- Phase & Loss Stable
- Long Flex Life
- Triple Shielded Cable
- High Mating Cycle, Stainless Steel Connectors
- Rugged, Solder-Clamp Attachment
- Redundant, Long Life Strain Relief System
- ROHS Compliant

Time's SilverlineTM Product Guarantee

Times will repair or replace your SilverLine test cable at its option if the connector attachment fails within four months of shipment. This guarantee excludes cable or connector interface damage from misuse or abuse.

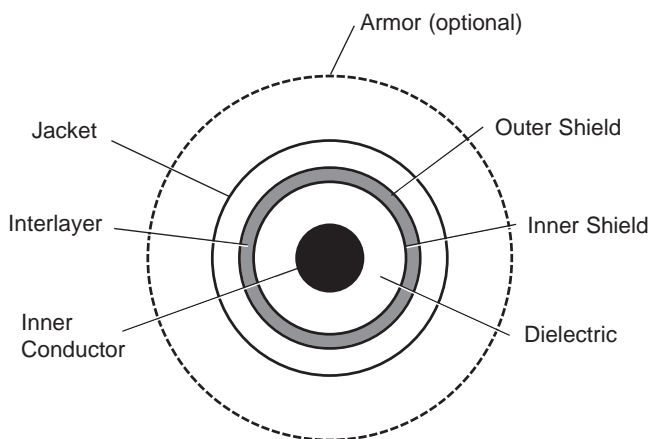

Cable Construction

Inner Conductor: Solid Silver Plated Copper Clad Steel

Dielectric: Solid PTFE

Shield: Silver-Plated Copper Flat Ribbon Braid Aluminum-Polyimide Tape Interlayer 36 GA Silver-Plated Copper Braid (90%k)

Jacket: Clear FEP

Armor (Optional): Steel wire reinforced, thick wall, high flex life clear PVC

Connectors

- Passivated stainless steel finish (QMA coupling nut nickel plated brass)
- QMA sure-grip coupling nut design
- Captive contact
- Thick wall interface (SMA)
- Gold plated beryllium copper center contacts
- PTFE dielectric
- Type N OneTurn™ (1 full rotation to mate)
- High temperature 7mm
- Knurl/hex coupling nut (Type N and TNC)
- Precision grade 7-16

Connector Attachment/Strain Relief

- Rugged, solder-clamp to braid. 175 lb pull force. Additional crimp system on armored version.
- Redundant triple layer strain relief system (Dual layer on armored version)

Physical & Mechanical Specifications

Dimensions	in	mm
Inner Conductor	0.037	0.94
Dielectric	0.116	2.95
Inner Shield	0.126	3.20
Interlayer	0.132	3.35
Outer Shield	0.154	3.91
Jacket	0.195	4.95
Armor (optional)	0.450	11.50
Weight lbs./ft (kg/m)	Cable: 0.043 (0.064)	Armor: 0.066 (0.098)
Armor Crush Resistance	1200 lbs. per linear inch	
Bend Radius: minimum	1	25
Connector Retention	Unarmored & Armored > 175 lbs	
Mating Life Cycle	SMA, Type N: > 5000*	QMA: > 2500*
Length Tolerances	≤ 2 ft. or 0.75m, -0, +0.50" (12.7mm) > 2 ft. or 0.75m, -0, +2% of length	
Temperature Range	-67°/+221°F	-55°/+105°C

Electrical Specifications

VSWR Max		4 GHz	6 GHz	18 GHz	26.5 GHz**
	BNC	1.20:1			
	7-16 DIN, QMA		1.25:1		
	SMA, 2.4mm, 3.5mm, Type N, TNC		1.20:1	1.30:1	1.35:1 (SMA, 2.4mm, 3.5mm)
	7mm		1.25:1	1.35:1	
Impedance	50 ohms				
Velocity of Propagation	70 %				
Shielding Effectiveness	>100 dB				
Capacitance	29.4 pf/ft = 96.4 pf/meter				
Phase Stability (ten, 4" radius, 180° reverse bends)	DC to 10 GHz: +/- 1.1° 10 to 18 GHz: +/- 2.0°				
Attenuation Max @ +77°F (+25°C)					
Attenuation (GHz)	dB/100 ft		dB/100 m		
1	12.2		40.0		
2	18.0		59.0		
6	34.2		112		
12	52.5		172		
18	68.4		224		
26.5	88.7		290		
Attenuation at Frequency (A=K1 √ FMHz + K2 FMHz)					
K1	0.348				
K2	0.0012				
Power Handling @ +77°F (+25°C) (Sea Level) (Cable Only***)					
Power Handling (GHz)	Watts (max.)				
0.4	891				
1	539				
2	363				
6	180				
12	117				
18	88				
26.5	65				

* SMA Male & Type N: Assumes use of calibrated torque wrench, proper care and cleaning of interface and mated connector is within mil spec limits. † QMA: Assumes proper use, care and cleaning.


** All 26.5 GHz cables are RF characterized on a production basis through 20.0 GHz.

*** Connector configuration may limit cable assembly maximum power handling capability.

Specifications subject to change without notice. <http://www.rfoc.net/> TEL: 0755-83397033 FAX: 0755-83376182 E-MAIL: szss20@163.com

SilverLine Test Cable

Typical VSWR vs Frequency
(26.5 GHz SMA Male/SMA Male, 3 ft long)

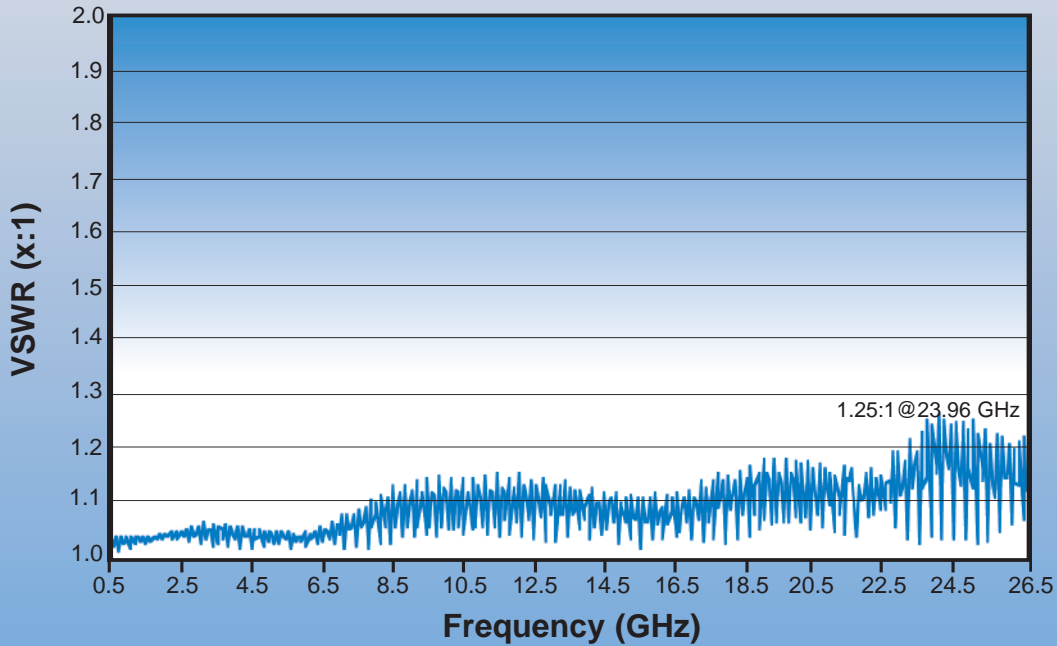

Ordering Information

U = Unarmored
A = Armored

Feet: 0.50 ft Increments

Example: -04.50F = 4.50 ft

Meters: 0.25 m increments

Example: -00.75M = 0.75 m

SLXXX-XXXXXX-XX.XXX

F = Feet M = Meters

Connector Codes (2 or 3 Characters)

First Connector

Maximum Frequency

04 = 4.0 GHz (BNC equipped only)

06 = 6.0 GHz

18 = 18.0 GHz

26 = 26.5 GHz (SMA, 2.4mm, 3.5mm only)



3.5mm Female (L), Ruggedized 3.5mm Female (R)




3.5mm Male (L), Ruggedized 3.5mm Male (R)

- BM = BNC Male
- SM = SMA Male
- S1T** = SMA Male **OneTurn™**
- SF = SMA Female
- SMR = SMA Right Angle
- 35M = 3.5mm Male
- 35F = 3.5mm Female
- 3RM = 3.5mm Ruggedized Male
- 3RF = 3.5mm Ruggedized Female
- 2RF = 2.4mm Ruggedized Female
- NM = Type N Male
- N1T** = Type N Male **OneTurn™**
- NF = Type N Female
- NMR = Type N Right Angle
- 70M = 7mm
- 76M = 7-16 DIN Male
- 76F = 7-16 DIN Female
- TM = ETNC Male (Extended range)
- TF = ETNC Female (Extended range)
- QMM = QMA Male

Second Connector

Some connector combinations and/or lengths may be unavailable. Please contact Times or your Times authorized representative.

Specifications subject to change without notice.

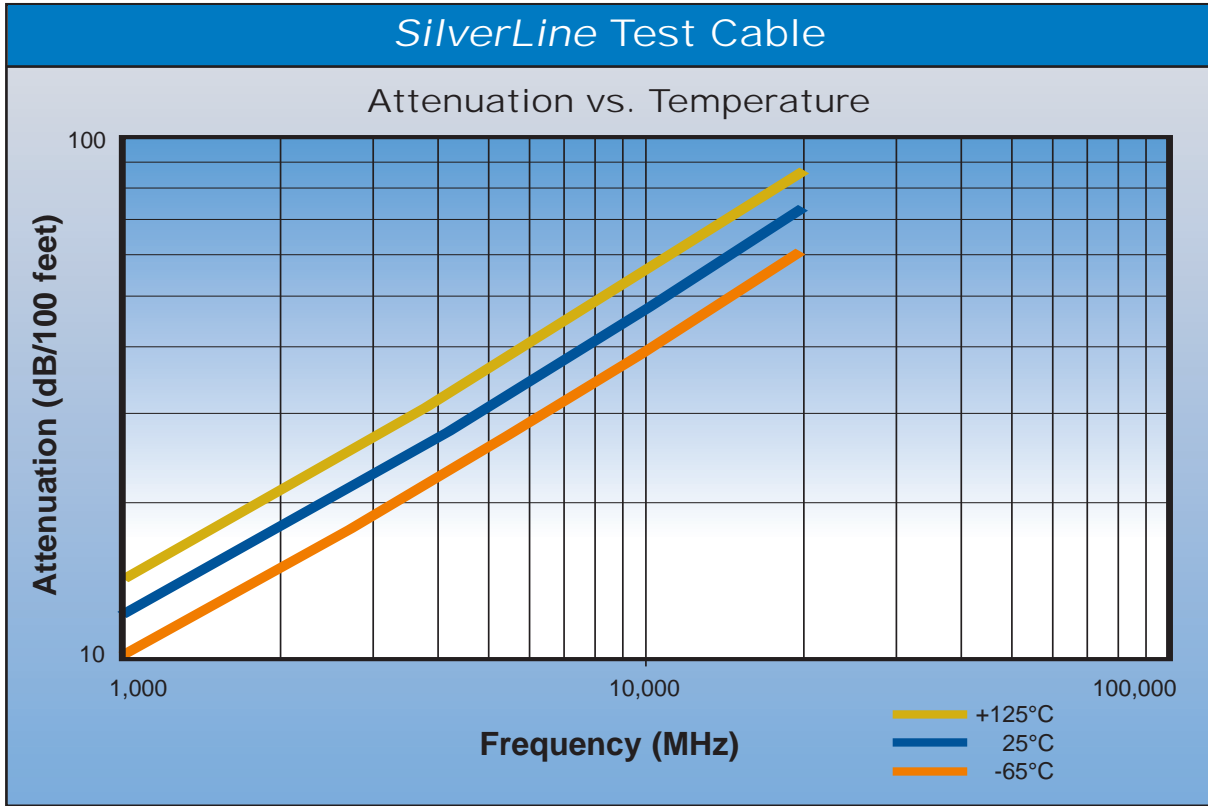

SilverLine QMA Adaptors

- | | |
|---------------------------------------|--|
| 3191-133EA SMA Plug | 3191-188EA BNC Jack |
| 3191-134EA SMA Jack (Standard) | 3191-189EA Type N Jack |
| 3191-141EA Mini-UHF Plug (Lengthened) | 3191-190EA N Plug-QMA plug between series |
| 3191-143EA Type N Plug | 3191-192EA SMB Plug |
| 3191-148EA TNC Plug | 3191-193EA TNC Reverse Polarity |
| 3191-182EA Mini-UHF Jack | 3191-194EA SMA Reverse Polarity |
| 3191-183EA PL259 Jack | 3191-195EA SMA Plug-QMA plug between series |
| 3191-184EA PL259 Plug | 3191-196EA SMB Jack |
| 3191-187EA BNC Plug | |

TuffGrip Adaptors

- | | |
|--------------------------------------|---------------------------------|
| 3191-180EA = 7-16 Female-7-16 Female | 3191-222EA = N Male-7-16 Female |
| 3191-212EA = N Male-N Male | 3191-223EA = N Male-7-16 Male |
| 3191-221EA = N Female-N Female | |

All Times SilverLine adaptors are solid stainless steel and designed for ruggedness, durability and long life.



World Headquarters: 358 Hall Avenue, Wallingford, CT 06492 • Tel: 203-949-8400, 1-800-867-2629 Fax: 203-949-8423

International Sales: 4 School Brae, Dysart, Kirkcaldy, Fife, Scotland KY1 2XB UK • Tel: +44(0)1592655428 Fax: +44(0)1592653162

China Sales: Unit A, Floor 14, East Ocean Center, No. 618 Yan'an Road East, Shanghai, China 200001 • Tel: 86-21-33184650 Fax: 86-21-53854506

www.timesmicrowave.com

SUNSTAR射频通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376182 E-MAIL: szss20@163.com