

ULTRA-HIGH VACUUM MICROWAVE FEED-THROUGH, SMA FEMALE

FEATURES

- High-performance microwave design
- Extreme environment capability
- High-reliability precision connector interfaces
- MTBF >10,000,000 hours per MIL-HDBK-217
- UHV materials
- Designed for welded installations
- Easily modified for custom designs

APPLICATIONS

- Beam position monitors for particle accelerators
- Strip line transitions
- Anywhere a microwave signal must be brought through a process barrier (vacuum, pressure, environment, etc.)




MSSI part #853872

The SMA UHV feed-through features a pure 50-ohm impedance with a long center pin extension suitable for attachment to the strip line section of a beam position monitor (BPM). Meggitt Safety Systems Inc. (MSSI) designed the outer-body material for welding directly into a chamber using laser, e-beam, or TIG methods.

As with all of our connector designs, MSSI accurately predicted electrical performance using sophisticated microwave analysis tools. We accomplished impedance matching with proven techniques for precision broadband microwave devices. Although we designed this part for mode-free operation up to 20 GHz, some customers have tested the characteristics to 36 GHz with satisfactory electrical performance.

MSSI can easily modify the basic design for a variety of customer applications and environments. Please give us a call for your custom requirements.

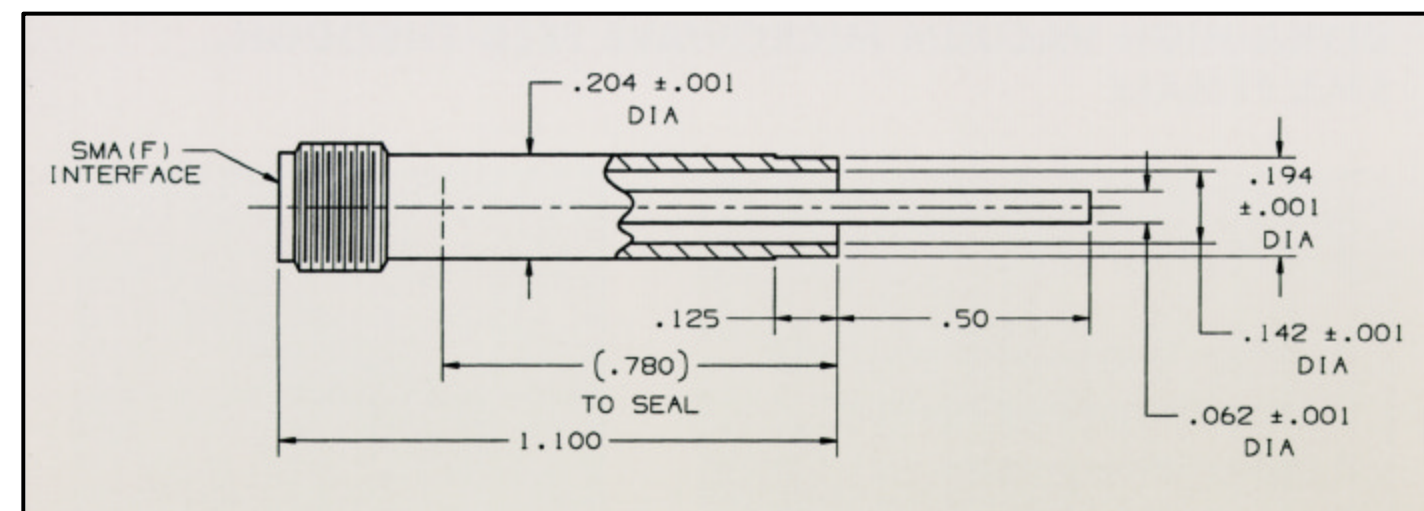

SPECIFICATIONS

Impedance: 50 ohms

Frequency Range: DC to 20 GHz

VSWR: 1.03:1 max to 3 GHz;

1.15:1 max to 20 GHz

Insertion loss: 0.10 dB max @ 3 GHz;

0.50 dB max @ 20 GHz.

Insulation resistance: >10¹² ohms

Voltage: 1,500 VRMS

Operating temperature range:

Based on outer body material –

304 stainless steel: 77°K to 573°K (-196°C to +300°C)

316 stainless steel 4°K to 573°K (-269°C to +300°C)

Inconel®: 77°K to 773°K (-196°C to +500°C)

Hermeticity: <1x10⁻¹¹ cc He/sec

Radiation: >200 megarads gamma

Connector interface: SMA per MIL-C-39012

Materials:

Outer body: 304 stainless steel, 316L stainless steel, or Inconel®.

Center conductor: TZM molybdenum per ASTM B365.

Insulator: AL₂O₃ strengthened boro-silicate seal (130,000 psi compressive strength).

Connector contact: Gold-plated BeCu.

Custom materials: Cupronickel, monel, and titanium.



1915 Voyager Avenue
Simi Valley, CA 93063-3349
Telephone: +1 (805) 584-4100
Fax: +1 (805) 578-3400
URL: <http://www.stablecable.com>

Conflat is a registered trademark of Varian, Inc. Inconel is a registered trademark of Huntington Alloys.