
DC-2.5 GHz 3 V, High Isolation Silicon RFIC Amplifier

Technical Data


Features

- **High Reverse Isolation**
-40 dB at 1.9 GHz
- **Single +3V Supply**
- 15 dB $|S_{21}|^2$ at 1.9 GHz
- 200 Ω Output Impedance
- Ultra-Miniature Package
- Unconditionally Stable


Applications

- **LO Buffer and Amplifier for Cellular, Cordless, Special Mobile Radio, PCS, ISM, Wireless LAN, DBS, TVRO, and TV Tuner**


Simplified Schematic

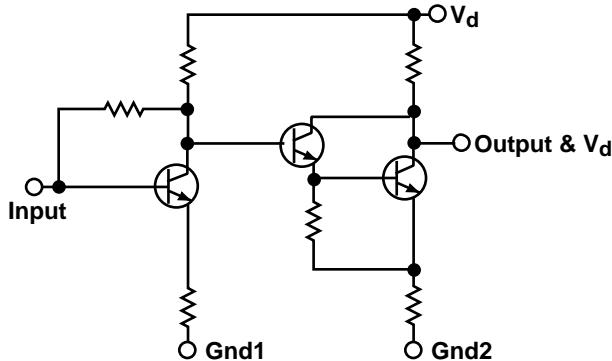

Surface Mount SOT-363 (SC-70) Package

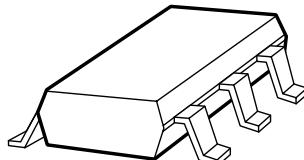

Pin Connections and Package Marking

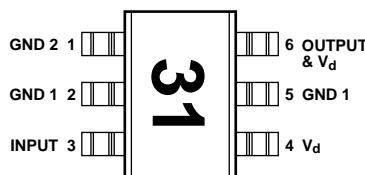

Note: Package marking provides orientation and identification.

INA-31063

Description

Hewlett-Packard's INA-31063 is a Silicon RFIC amplifier that has excellent gain and isolation for applications to 2.5 GHz. Packaged in an ultra-miniature SOT-363 package, it requires half the board space of a SOT-143 package.

The INA-31063 uses a unique circuit topology that provides broadband gain and 50 Ω input and 200 Ω output impedance. With more than 35 dB of isolation to 2.5 GHz makes it an excellent candidate for LO buffer applications.

The INA-31063 is fabricated using HP's 30 GHz f_{MAX} ISOSAT™ Silicon bipolar process which uses nitride self-alignment, submicrometer lithography, trench isolation, ion implantation, and polyimide intermetal dielectric and scratch protection to achieve superior performance, uniformity, and reliability.

Absolute Maximum Ratings

Symbol	Parameter	Units	Absolute Maximum ^[1]
V_d	Device Voltage, output to ground	V	6.0
P_{in}	CW RF Input Power	dBm	+7.0
T_j	Junction Temperature	°C	150
T_{STG}	Storage Temperature	°C	-65 to 150

Thermal Resistance^[2]:

$$\theta_{jc} = 170 \text{ °C/W}$$

Notes:

1. Operation of this device above any one of these limits may cause permanent damage.
2. $T_C = 25 \text{ °C}$ (T_C is defined to be the temperature at the package pins where contact is made to the circuit board)

INA-31063 Electrical Specifications, $T_C = 25 \text{ °C}$, $Z_0 = 50 \Omega$, $V_d = 3 \text{ V}$

Symbol	Parameters and Test Conditions	Units	Min.	Typ.	Max.	Std. Dev. ^[4]
$ S_{21} ^2$	Gain in 50 Ω system $f = 0.9 \text{ GHz}$ $f = 1.9 \text{ GHz}$ $f = 2.4 \text{ GHz}$	dB	13.0 ^[3]	14.0 15.1 15.0		0.44
NF_{50}	Noise Figure $f = 1.9 \text{ GHz}$	dB		6.1		0.25
P_{1dB}	Output Power at 1 dB Gain Compression $f = 0.9 \text{ GHz}$ $f = 1.9 \text{ GHz}$ $f = 2.4 \text{ GHz}$	dBm		-1.8 -2.1 -3.5		
IP_3	Output Third Order Intercept Point $f = 0.9 \text{ GHz}$ $f = 1.9 \text{ GHz}$ $f = 2.4 \text{ GHz}$	dBm		9.1 8.5 6.8		
$VSWR_{in}$	Input VSWR $f = 0.1 - 2.4 \text{ GHz}$			1.35:1		
$VSWR_{out}$	Output VSWR $f = 0.1 - 2.4 \text{ GHz}$			3.5:1		
I_d	Device Current	mA		11.0	13.5 ^[3]	0.47

Notes:

3. Guaranteed specifications are 100% tested in production.
4. Standard deviation number is based on measurement of a large number of parts from three non-consecutive wafer lots during the initial characterization of this product, and is intended to be used as an estimate for distribution of the typical specification.

INA-31063 Typical Performance, $T_C = 25^\circ\text{C}$, $Z_0 = 50 \Omega$, $V_d = 3 \text{ V}$

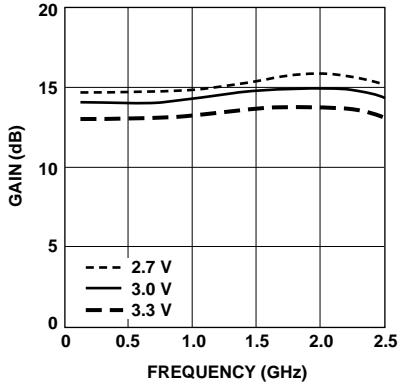


Figure 1. Gain vs. Frequency and Voltage measured in a 50Ω system.

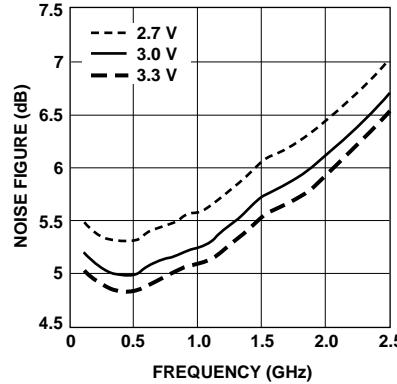


Figure 2. Noise Figure vs. Frequency and Voltage.

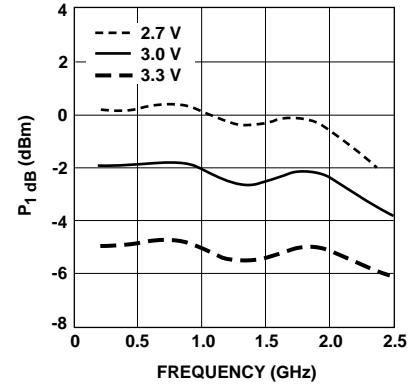


Figure 3. Output Power for 1 dB Gain Compression vs. Frequency and Voltage.

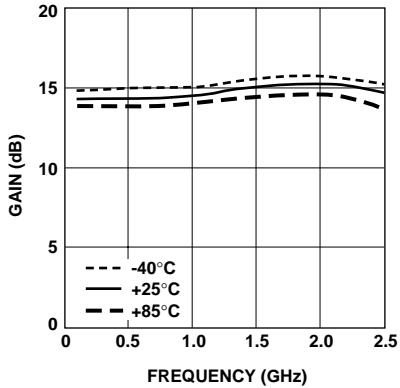


Figure 4. Gain vs. Frequency and Temperature measured in a 50Ω system.

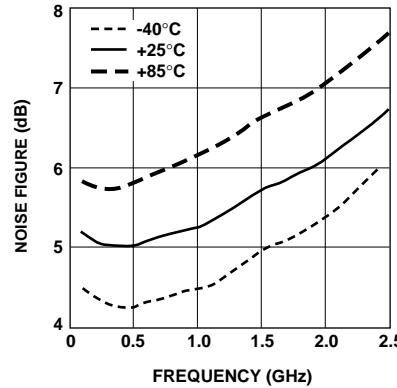


Figure 5. Noise Figure vs. Frequency and Temperature.

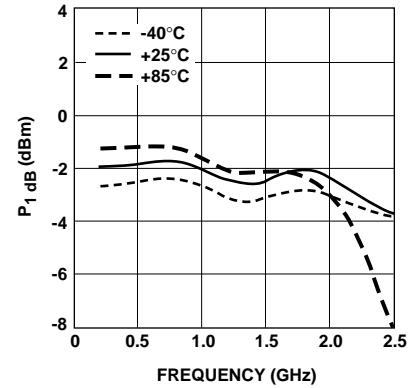


Figure 6. Output Power for 1 dB Gain Compression vs. Frequency and Temperature.

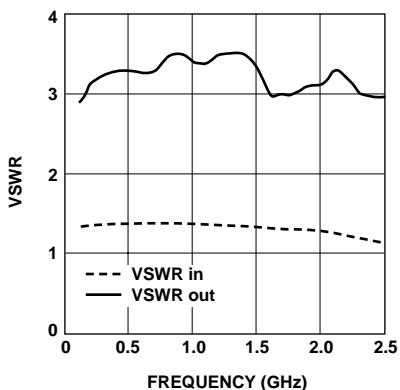


Figure 7. Input and Output VSWR vs. Frequency.

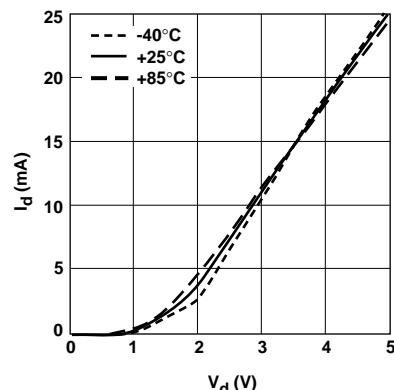


Figure 8. Supply Current vs. Voltage and Temperature.

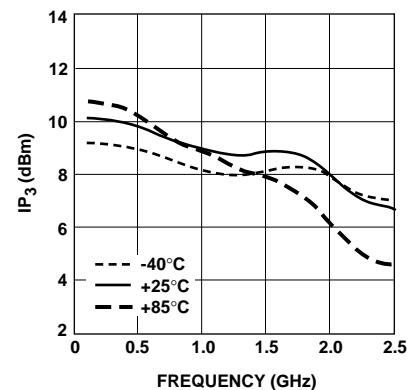


Figure 9. Third Order Intercept Point, IP_3 vs. Frequency and Temperature.

INA-31063 Typical Scattering Parameters^[5], T_C = 25°C, Z₀ = 50 Ω, V_d = 3.0 V

Freq. GHz	S ₁₁		S ₂₁			S ₁₂			S ₂₂		K Factor
	Mag	Ang	dB	Mag	Ang	dB	Mag	Ang	Mag	Ang	
0.1	0.14	171	13.6	4.81	-5	-32.5	0.024	10	0.49	-3	3.45
0.2	0.15	167	13.7	4.84	-11	-37.1	0.014	11	0.52	-4	5.37
0.3	0.14	164	13.7	4.83	-15	-36.0	0.016	-3	0.51	-4	4.79
0.4	0.15	163	13.7	4.86	-20	-37.6	0.013	-39	0.54	-3	5.60
0.5	0.15	152	13.8	4.88	-26	-39.8	0.010	-6	0.53	-5	7.31
0.6	0.14	152	13.8	4.88	-30	-37.1	0.014	-18	0.51	-5	5.38
0.7	0.14	151	13.9	4.93	-35	-38.6	0.012	-35	0.53	-5	6.02
0.8	0.15	147	14.0	4.99	-40	-41.3	0.009	-46	0.55	-8	7.66
0.9	0.14	143	14.0	5.04	-45	-45.5	0.005	-35	0.56	-11	13.54
1.0	0.14	138	14.1	5.06	-51	-45.2	0.005	-4	0.55	-14	13.71
1.1	0.14	137	14.2	5.12	-56	-44.1	0.006	-6	0.54	-17	11.32
1.2	0.13	136	14.3	5.20	-61	-45.3	0.005	-16	0.55	-19	13.20
1.3	0.13	132	14.4	5.26	-67	-47.3	0.004	20	0.55	-24	16.34
1.4	0.13	129	14.5	5.33	-73	-46.8	0.005	40	0.55	-28	12.92
1.5	0.13	125	14.6	5.34	-80	-41.9	0.008	58	0.53	-35	8.32
1.6	0.12	128	14.6	5.36	-85	-41.5	0.008	30	0.49	-36	8.84
1.7	0.12	130	14.8	5.49	-91	-44.3	0.006	27	0.50	-37	11.23
1.8	0.12	130	14.9	5.57	-97	-45.0	0.006	31	0.50	-40	11.18
1.9	0.12	130	15.1	5.69	-104	-46.4	0.005	53	0.51	-44	12.80
2.0	0.11	128	15.2	5.77	-111	-45.8	0.005	61	0.52	-48	12.59
2.1	0.10	129	15.3	5.83	-119	-44.7	0.006	74	0.53	-54	10.20
2.2	0.08	130	15.3	5.79	-127	-43.4	0.007	78	0.52	-62	8.94
2.3	0.07	134	15.1	5.71	-135	-42.4	0.008	79	0.50	-68	8.22
2.4	0.05	144	15.0	5.63	-143	-41.7	0.008	76	0.49	-73	8.42
2.5	0.04	166	14.8	5.50	-152	-41.8	0.008	74	0.49	-80	8.64
2.6	0.04	-176	14.5	5.29	-160	-42.2	0.008	76	0.47	-87	9.24
2.7	0.05	-159	14.1	5.06	-167	-43.2	0.007	77	0.44	-93	11.43
2.8	0.06	-151	13.7	4.84	-174	-43.1	0.007	85	0.40	-97	12.34
2.9	0.08	-149	13.3	4.62	178	-43.3	0.007	86	0.39	-100	13.10
3.0	0.10	-150	12.8	4.36	172	-44.2	0.006	96	0.36	-105	16.46
3.1	0.13	-152	12.3	4.11	165	-44.0	0.006	105	0.34	-108	17.71
3.2	0.15	-153	11.8	3.89	159	-43.0	0.007	115	0.32	-109	16.22
3.3	0.17	-155	11.3	3.65	153	-42.0	0.008	118	0.30	-111	15.17
3.4	0.19	-158	10.7	3.42	147	-42.2	0.008	125	0.29	-113	16.23
3.5	0.21	-160	10.1	3.20	142	-41.3	0.009	139	0.27	-115	15.49
3.6	0.22	-161	9.6	3.02	137	-38.9	0.011	143	0.25	-114	13.50
3.7	0.24	-163	9.1	2.84	132	-38.0	0.013	144	0.24	-114	12.09
3.8	0.25	-165	8.5	2.66	128	-37.3	0.014	151	0.23	-115	12.00
3.9	0.25	-167	8.0	2.51	124	-35.5	0.017	155	0.21	-113	10.55
4.0	0.26	-169	7.5	2.37	120	-34.2	0.019	153	0.21	-111	9.98
4.1	0.27	-172	7.0	2.24	116	-33.2	0.022	153	0.20	-109	9.10
4.2	0.27	-175	6.5	2.12	112	-32.4	0.024	154	0.20	-108	8.83
4.3	0.28	-178	6.1	2.01	109	-31.3	0.027	154	0.19	-105	8.26
4.4	0.29	180	5.6	1.90	105	-30.5	0.030	154	0.19	-103	7.82
4.5	0.29	177	5.1	1.81	102	-29.7	0.033	153	0.19	-101	7.47
4.6	0.30	174	4.7	1.72	98	-28.9	0.036	152	0.19	-99	7.17
4.7	0.31	171	4.3	1.63	95	-28.3	0.039	151	0.19	-98	6.94
4.8	0.32	169	3.8	1.55	92	-27.7	0.041	151	0.19	-97	6.89
4.9	0.33	166	3.4	1.48	89	-27.0	0.045	151	0.19	-95	6.54
5.0	0.33	164	3.0	1.41	87	-26.2	0.049	150	0.19	-93	6.30

Note:

5. Reference plane per Figure 19 in Applications Information section.

INA-31063 Applications Information

Introduction

The INA-31063 is a +3 volt silicon RFIC amplifier that is designed with a two stage internal network to provide a broadband gain and $50\ \Omega$ input and $200\ \Omega$ output impedance. With a -1 dB compressed output power of $-3\ \text{dBm}$ and high isolation of $40\ \text{dB}$, the INA-31063 is well suited for LO buffer amplifier applications in mobile communication systems.

The $200\ \Omega$ output impedance of the amplifier allows easy connections to additional RFICs and some filters.

In addition to use in buffer applications in the cellular market, the INA-31063 will find many applications in battery operated wireless communication systems.

Operating Details

The INA-31063 is a voltage biased device that operates from a +3 volt power supply with a typical current drain of 11 mA. All bias regulation circuitry is integrated into the RFIC. Figure 10 shows a typical implementation of the INA-31063. The supply voltage for the INA-31063 must be applied to two terminals, the V_d pin and the RF Output pin.

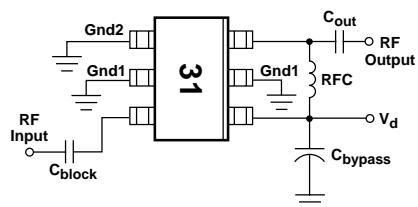


Figure 10. Basic Amplifier Application.

The V_d connection to the amplifier is RF bypassed by placing a capacitor to ground near the V_d pin of the amplifier package. The power supply connection to the RF Output pin is achieved by means of a RF choke (inductor). The value of the RF choke must be large relative to $50\ \Omega$ in order to prevent loading of the RF Output. The supply voltage end of the RF choke is bypassed to ground with a capacitor. If the physical layout permits, this can be the same bypass capacitor that is used at the V_d terminal of the amplifier. Blocking capacitors are normally placed in series with the RF Input and the RF Output to isolate the DC voltages on these pins from circuits adjacent to the amplifier. The values for the blocking and bypass capacitors are selected to provide a reactance at the lowest frequency of operation that is small relative to $50\ \Omega$. Since the gain of the INA-31063 extends down to DC, the frequency response of the amplifier is limited only by the values of the capacitors and choke.

RF Layout

An example for the RF layout for the INA-31063 is shown in Figure 11.

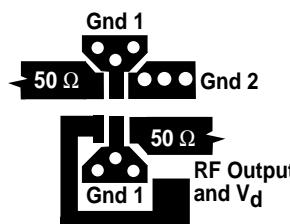


Figure 11. RF Layout

This example uses a microstripline design (solid groundplane on the backside of

the circuit board). The circuit board material is 0.031-inch thick FR4. Plated through holes (vias) are used to bring the ground to the top side of the circuit where needed. The performance of INA-31063 is sensitive to ground path inductance. The two-stage design creates the possibility of a feedback loop being formed through the ground returns of the stages, Gnd 1 and Gnd 2.

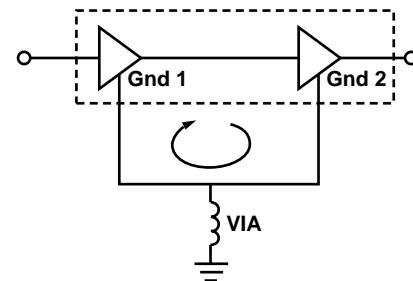


Figure 12. INA-31063 Potential Ground Loop.

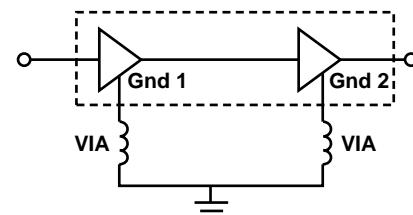


Figure 13. INA-31063 Suggested Layout.

At least one ground via should be placed adjacent to each ground pin to assure good RF grounding. Multiple vias are used to reduce the inductance of the path to ground and should be placed as close to the package terminals as practical.

The effects of the potential ground loop shown in Figure 12 may be observed as a "peaking" in the gain versus frequency response, an increase in input VSWR, or even as return gain at the input of the INA-31063.

Figure 14 shows an assembled $50\ \Omega$ amplifier. The +3 volt supply is fed directly into the V_d pin of the INA-31063 and into the RF Output pin through the RF choke (RFC). Capacitor C_3 provides RF bypassing for both the V_d pin and the power supply end of the RFC. Capacitor C_4 is optional and may be used to add additional bypassing for the V_d line. A well-bypassed V_d line is especially necessary in cascades of amplifier stages to prevent oscillation that may occur as a result of RF feedback through the power supply lines.

900 MHz $50\ \Omega$ Matched Example

The use of a simple impedance matching network will typically increase both gain and output power by 1.5 dB and 1.5 dBm, respectively. The values that were chosen for the two tuning elements were a 12 nF series inductor and a 1.0 pF shunt capacitor. The RF choke was a 56 nH (Coilcraft 1008CS-221, TOKO LL2012-F or equivalent). The two

blocking capacitors were 100 pF and the bypass capacitor was 1000 pF.

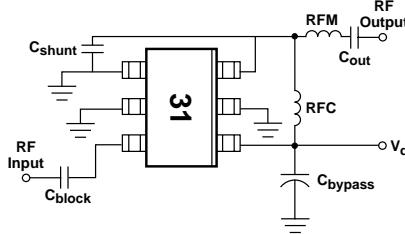


Figure 15. Impedance Matched Output Amplifier Circuit.

These values provide excellent amplifier performance at 900 MHz. Larger values for the choke and capacitors can be used to extend the lower end of the bandwidth. A convenient method for making RF connection to the demonstration board is to use a PCB mounting type of SMA connector (Johnson 142-0701881, or equivalent). These connectors can be slipped over the edge of the PCB and the center conductor soldered to the input and output lines. The ground pins of the connectors can be soldered to the ground plane on the backside of board.

Frequency	RFC	RFM	Cshunt
400 MHz	120 nH	27 nH	2.7 pF
900 MHz	56 nH	12 nH	1.0 pF
1900 MHz	33 nH	4.7 nH	None
2400 MHz	27 nH	1.8 nH	None

Figure 16. Suggested Matching Elements for Common Frequency Bands.

The test results for the INA-31063 were measured on the $50\ \Omega$ input and output impedance matched amplifier described above.

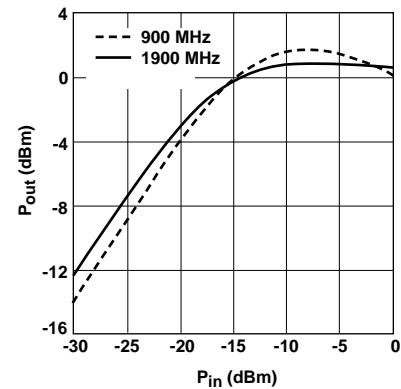


Figure 17. Measured Input Power vs. Output Power on Assembled $50\ \Omega$ Amplifier at 900 MHz and 1900 MHz.

An important specification when selecting a LO buffer amplifier is reverse isolation under P_{1dB} input conditions. Figure 18 shows the measured reverse isolation with -10 dBm applied to the input of the device.

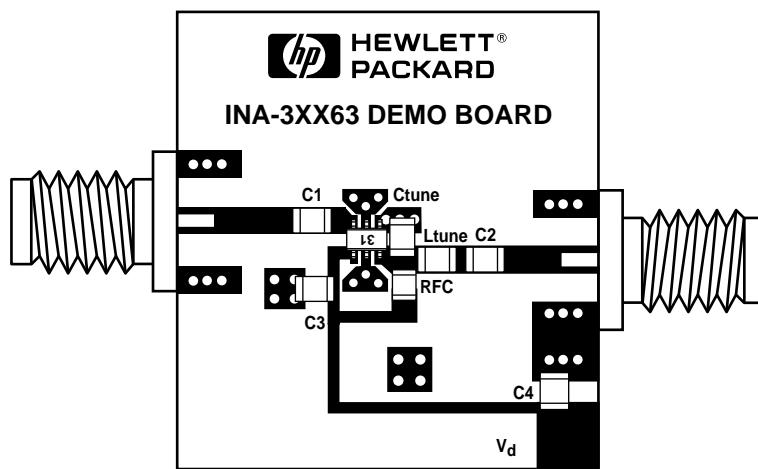


Figure 14. Assembled Amplifier.

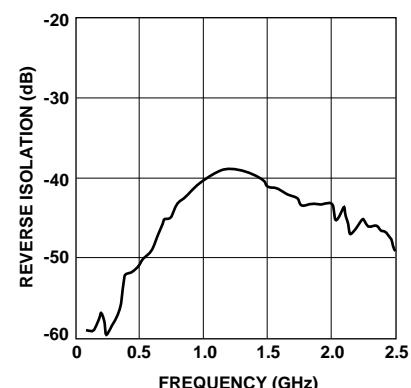


Figure 18. Measured Isolation.

PCB Materials

Typical choices for PCB material for low cost wireless applications are FR-4 or G-10 with a thickness of 0.025 (0.636 mm) or 0.031 inches (0.787 mm). A thickness of 0.062 inches (1.574 mm) is the maximum that is recommended for use with this particular device. The use of a thicker board material increases the inductance of the plated through vias used for RF grounding and may deteriorate circuit performance. Adequate grounding is needed not only to obtain maximum amplifier performance but also to reduce any possibility of instability.

Phase Reference Planes

The positions of the reference planes used to measure S-Parameters for this device are shown in Figure 19. As seen in the illustration, the reference planes are located at the point where the package leads contact the test circuit.

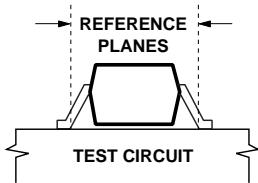


Figure 19. Phase Reference Planes.

SOT-363 PCB Layout

The INA-31063 is packaged in the miniature SOT-363 (SC-70) surface mount package. A PCB pad layout for the SOT-363 package is shown in Figure 20 (dimensions are in inches). This layout provides ample allowance for package placement by automated assembly equipment without adding pad parasitics that could impair the high frequency

performance of the INA-31063. The layout that is shown with a nominal SOT-363 package footprint superimposed on the PCB pads for reference.

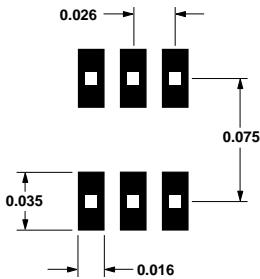


Figure 20. PCB Pad Layout for INA-31063 (dimensions in inches).

Statistical Parameters

Several categories of parameters appear within this data sheet. Parameters may be described with values that are either "minimum or maximum," "typical," or "standard deviations." The values for parameters are based on comprehensive product characterization data, in which automated measurements are made on a large number of parts taken from 3 non-consecutive process lots of semiconductor wafers. The data derived from product characterization tends to be normally distributed, e.g., fits the standard "bell curve." Parameters considered to be the most important to system performance are bounded by minimum or maximum values. For the INA-31063, these parameters are: Power Gain ($|S21|^2$), and the Device Current (I_d). Each of these guaranteed parameters is 100% tested. Values for most of the parameters in the table of Electrical Specifications that are described by typical data are the mathematical mean (μ), of the normal distribution taken from

the characterization data. For parameters where measurements or mathematical averaging may not be practical, such as S-parameters or Noise Parameters and the performance curves, the data represents a nominal part taken from the "center" of the characterization distribution. Typical values are intended to be used as a basis for electrical design.

To assist designers in optimizing not only the immediate circuit using the INA-31063, but to also optimize and evaluate trade-offs that affect a complete wireless system, the standard deviation (σ) is provided for three of the Electrical Specifications parameters (at 25°C) in addition to the mean. The standard deviation is a measure of the variability about the mean. It will be recalled that a normal distribution is completely described by the mean and standard deviation. Standard statistics tables or calculations provide the probability of a parameter falling between any two values, usually symmetrically located about the mean. Referring to Figure 21 for example, the probability of a parameter being between $\pm 1\sigma$ is 68.3%; between $\pm 2\sigma$ is 95.4%; and between $\pm 3\sigma$ is 99.7%.

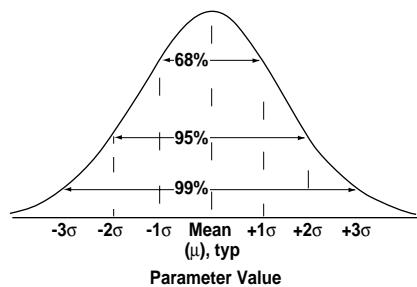


Figure 21. Normal Distribution.

SMT Assembly

Reliable assembly of surface mount components is a complex process that involves many material, process, and equipment factors, including: method of heating (e.g., IR or vapor phase reflow, wave soldering, etc.) circuit board material, conductor thickness and pattern, type of solder alloy, and the thermal conductivity and thermal mass of components. Components with a low mass, such as the SOT-363 package, will reach solder reflow temperatures faster than those with a greater mass.

The INA-31063 has been qualified to the time-temperature profile shown in Figure 22. This profile is representative of an IR reflow type of surface mount assembly process. After ramping up from room temperature, the circuit

board with components attached to it (held in place with solder paste) passes through one or more preheat zones. The preheat zones increase the temperature of the board and components to prevent thermal shock and begin evaporating solvents from the solder paste. The reflow zone briefly elevates the temperature sufficiently to produce a reflow of the solder.

The rates of change of temperature for the ramp-up and cool down zones are chosen to be low enough to not cause deformation of the board or damage to components due to thermal shock.

These parameters are typical for a surface mount assembly process for the INA-31063. As a general guideline, the circuit board and components should only be exposed to the minimum

temperatures and times necessary to achieve a uniform reflow of solder.

For more information on mounting considerations for packaged microwave semiconductors, please refer to Hewlett-Packard application note AN-A006.



Electrostatic Sensitivity

RFICs are electrostatic discharge (ESD)

sensitive devices. Although the INA-31063 is robust in design, permanent damage may occur to these devices if they are subjected to high-energy electrostatic discharges. Electrostatic charges as high as several thousand volts (which readily accumulate on the human body and on test equipment) can discharge without degradation in performance, reliability, or failure. Electronic devices may be subjected to ESD damage in any of the following areas:

- Storage & handling
- Inspection & testing
- Assembly
- In-circuit use

The INA-31063 is an ESD Class 1 device. Therefore, proper ESD precautions are recommended when handling, inspecting, testing, assembling, and using these devices to avoid damage.

For more information on Electrostatic Discharge and Control refer to Hewlett-Packard application note AN-A004R.


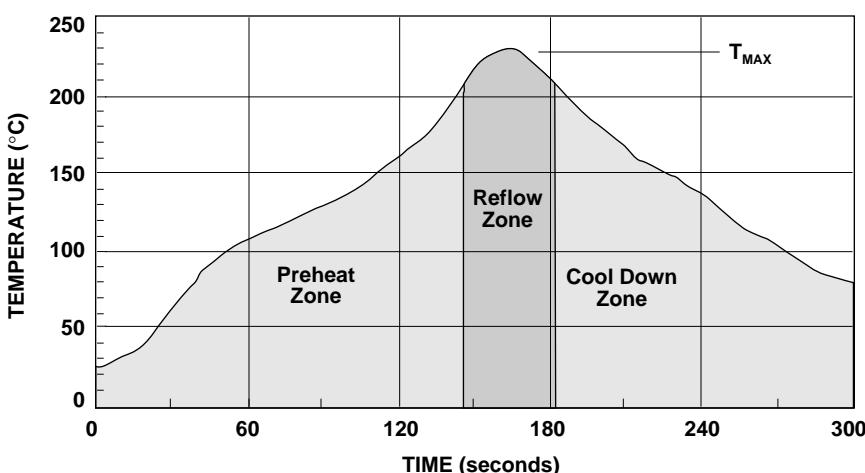


Figure 22. Surface Mount Assembly Profile.

Package Dimensions

Outline 63 (SOT-363/SC-70)

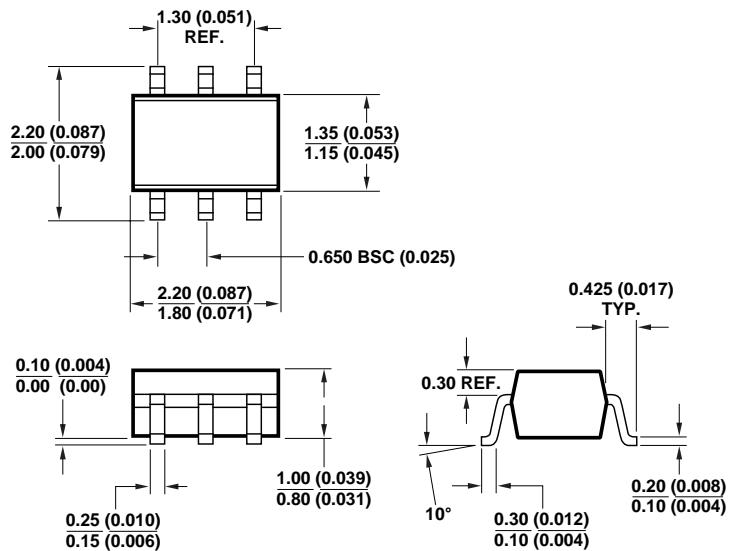


DIMENSIONS ARE IN MILLIMETERS (INCHES)

INA-31063 Part Number Ordering Information

Part Number	Devices per Container	Container
INA-31063-BLK	100	tape strip in antistatic bag
INA-31063-TR1	3,000	7" reel
INA-31063-TR2	10,000	13" reel

Tape Dimensions and Product Orientation

For Outline 63

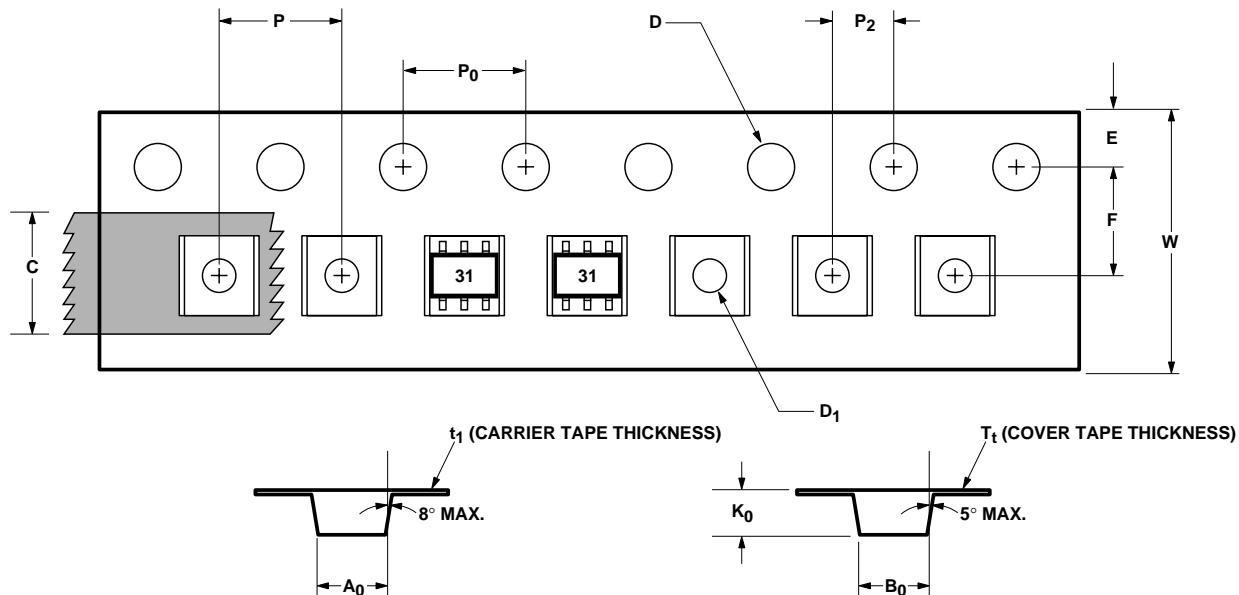

DESCRIPTION		SYMBOL	SIZE (mm)	SIZE (INCHES)
CAVITY	LENGTH	A ₀	2.24 ± 0.10	0.088 ± 0.004
	WIDTH	B ₀	2.34 ± 0.10	0.092 ± 0.004
	DEPTH	K ₀	1.22 ± 0.10	0.048 ± 0.004
	PITCH	P	4.00 ± 0.10	0.157 ± 0.004
	BOTTOM HOLE DIAMETER	D ₁	1.00 ± 0.25	0.039 ± 0.010
PERFORATION	DIAMETER	D	1.55 ± 0.05	0.061 ± 0.002
	PITCH	P ₀	4.00 ± 0.10	0.157 ± 0.004
	POSITION	E	1.75 ± 0.10	0.069 ± 0.004
CARRIER TAPE	WIDTH	W	8.00 ± 0.30	0.315 ± 0.012
	THICKNESS	t ₁	0.255 ± 0.013	0.010 ± 0.0005
COVER TAPE	WIDTH	C	5.4 ± 0.10	0.205 ± 0.004
	TAPE THICKNESS	T _t	0.062 ± 0.001	0.0025 ± 0.00004
DISTANCE	CAVITY TO PERFORATION (WIDTH DIRECTION)	F	3.50 ± 0.05	0.138 ± 0.002
	CAVITY TO PERFORATION (LENGTH DIRECTION)	P ₂	2.00 ± 0.05	0.079 ± 0.002



www.hp.com/go/rf

For technical assistance or the location of
your nearest Hewlett-Packard sales
office, distributor or representative call:

Americas/Canada: 1-800-235-0312 or
408-654-8675

Far East/Australasia: Call your local HP
sales office.

Japan: (81 3) 3335-8152

Europe: Call your local HP sales office.

Data subject to change.
Copyright © 1998 Hewlett-Packard Co.

Obsoletes 5967-5770E
Printed in U.S.A. 5967-????E (7/98)

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com>

商斯达工控安防网：<http://www.pc-ps.net>

商斯达电子元器件网：<http://www.sunstare.com>

商斯达微波光电产品网：<HTTP://www.rfoe.net>

商斯达消费电子产品网：<http://www.icasic.com>

商斯达实业科技产品网：<http://www.sunstars.cn> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN：SUNS8888@hotmail.com

邮编：518033 E-mail：szss20@163.com QQ：195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382