

IEC/EN/DIN EN60747-5-2 Option 060 for Plastic Optocoupler Data Sheet

Description

Optocouplers are frequently used to provide high voltage insulation.

Because optocouplers perform this safety function, they are regulated by many country safety agencies, both at the component level and the equipment level.

Standard 8 Pin DIP optocouplers with Option 060, are tested according to IEC/EN/DIN EN60747-5-2 at VIORM = 630 Vpeak.

Surface Mount S08 optocouplers with Option 060, are tested at VIORM = 560 Vpeak.

Agilent also offers other various IEC/EN/DIN EN60747-5-2 approved products at different levels of VIORM such as VIORM = 1414 Vpeak

(HCNWxxxx series) and VIORM = 891 Vpeak (HCPL-Jxxx series).

Refer to the front of the optocoupler section of the Isolation and Control Component Designer's Catalog, under Product Safety Regulations section, for a detailed description of IEC/EN/DIN EN60747-5-2 and the partial discharge tests for production

Option 060 is available on the following products:

Standard 8 Pin DIP Product (VIORM = 630 Vpeak)

HCPL-2211	HCPL-2212
HCPL-2219	HCPL-2300
HCPL-2400	HCPL-2611
HCPL-261A	HCPL-261N
HCPL-3120	HCPL-3150
HCPL-4503	HCPL-4504
HCPL-4506	HCPL-4701
HCPL-7840	

Surface Mount S08 Product (VIORM = 560 Vpeak)

HCPL-0211	HCPL-0454
HCPL-0466	HCPL-0611
HCPL-061A	HCPL-061N
HCPL-070A	

Contact your local Agilent Sales Representative concerning availability of this option for optocouplers not listed.

Ordering Information

Specify Part Number followed by Option Number.

Example:

HCPL-3120#060

This option may also be combined with Option #300 (gullwing surface mount) or #500 (gullwing in tape and reel).

To obtain these combinations, order Option #360 or #560 respectively.


Examples:

HCPL-3120 #360 (gullwing surface mount and IEC/EN/DIN EN60747-5-2 approved)

HCPL-3120 #560 (gullwing surface mount and IEC/EN/DIN EN60747-5-2 approved in tape and reel)


Marking Information

8 PIN DIP PACKAGE

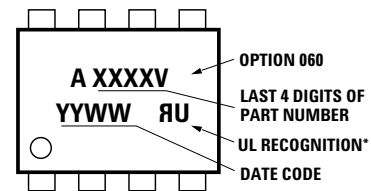

* NO UL MARKING ON HCPL-261A/261N/3120/3150/4701/7840.

S08 PACKAGE

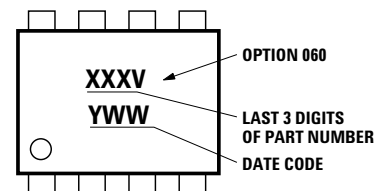

Agilent Technologies

Parameter	Symbol	Value		Units	Conditions
		DIP	S08		
Minimum External Air Gap (External Clearance)	L(101)	7.1	4.9	mm	Measured from input terminals to output terminals, shortest distance through air.
Minimum External Track ing (External Creepage)	- L(102)	7.4	4.8	mm	Measured from input terminals to output terminals, shortest distance path along body.
Minimum Internal Plastic Gap		0.08	0.08	mm	Through insulation distance, conductor to conductor, usually the direct distance between (Internal Clearance) the photoemitter and photodetector inside the optocoupler cavity.
Tracking Resistance (Comparative Tracking Index)	CTI	175	175	V	DIN IEC 112/VDE 0303 Part 1
Isolation Group		IIIa	IIIa		Material Group (DIN VDE 0110, 1/89, Table 1)

All Agilent data sheets report the creepage and clearance inherent to the optocoupler component itself. These dimensions are needed as a starting point for the equipment designer when determining the circuit insulation requirements. However, once mounted on a printed circuit board,

minimum creepage and clearance requirements must be met as specified for individual equipment standards. For creepage, the shortest distance path along the surface of a printed circuit board between the solder fillets of the input and output leads must be considered. There are recommended

techniques such as grooves and ribs which may be used on a printed circuit board to achieve desired creepage and clearances. Creepage and clearance distances will also change depending on factors such as pollution degree and insulation level.

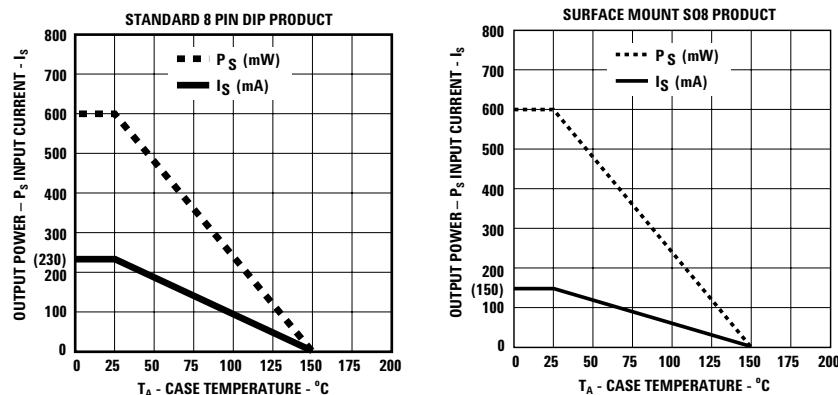


Figure 1. Thermal Derating Curve, Dependence of Safety Limiting Value with Case Temperature per VDE 0884.

IEC/EN/DIN EN60747-5-2 Insulation Related Characteristics (Option 060)

Standard 8 Pin DIP Package

*85°C: HCPL-2211, HCPL-2212, HCPL-2219, HCPL-2300, HCPL-2400, HCPL-2611, HCPL-261A, HCPL-261N, HCPL-4701, HCPL-7840.

**100°C: HCPL-3120, HCPL-3150, HCPL-4503, HCPL-4504, HCPL-4506.

S08 Package

*85°C: HCPL-0211, HCPL-0611, HCPL-061A, HCPL-061N, HCPL-070A.

**100°C: HCPL-0454, HCPL-0466.

Description	Symbol	Std. 8 Pin DIP	S08	Units
Installation classification per DIN VDE 0110/1.89, Table 1				
for rated mains voltage ≤ 150 V rms		I-IV	I-IV	
for rated mains voltage ≤ 300 V rms		I-IV	I-III	
for rated mains voltage ≤ 450 V rms		I-III		
Climatic Classification		55/85/21*	55/85/21*	
		55/100/21**	55/100/21**	
Pollution Degree (DIN VDE 0110/1.89)		2	2	
Maximum Working Insulation Voltage	V_{IORM}	630	560	V peak
Input to Output Test Voltage, Method b† $V_{IORM} \times 1.875 = V_{PR}$, 100% Production Test with $t_m = 1$ sec, Partial Discharge < 5 pC	V_{PR}	1181	1050	V peak
Input to Output Test Voltage, Method a† $V_{IORM} \times 1.5 = V_{PR}$, Type and Sample Test, $t_m = 60$ sec, Partial Discharge < 5 pC	V_{PR}	945	840	V peak
Highest Allowable Over voltage † (Transient Overvoltage, $t_{ini} = 10$ sec)	V_{IOTM}	6000	4000	V peak
Safety Limiting Values (Maximum values allowed in the event of a failure, also see Thermal Derating curve, Figure 1.)				
Case Temperature	T_S	175	150	°C
Input Current	$I_{S,INPUT}$	230	150	mA
Output Power	$P_{S,OUTPUT}$	600	600	mW
Insulation Resistance at T_S , $V_{10} = 500$ V	R_{IO}	$\geq 10^9$	$\geq 10^9$	Ω

†Refer to the front of the optocoupler section of the *Isolation and Control Component Designer's Catalog*, under Product Safety Regulations section (IEC/EN/DIN EN60747-5-2), for a detailed description.

Note: These optocouplers are suitable for "safe electrical isolation" only within the safety limit data. Maintenance of the safety data shall be ensured by means of protective circuits.

Note: The surface mount classification is Class A in accordance with CECC 00802.

**www.agilent.com/
semiconductors**

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312
or (408) 654-8675

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152(Domestic/International), or 0120-61-1280(Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand,
Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004 Agilent Technologies, Inc.

May 5, 2004

5989-1058EN



Agilent Technologies

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382