
**DATA SHEET
DC-4GHz Low Distortion GaAs Power FET****Features**

- **LOW COST SURFACE-MOUNT PLASTIC PACKAGE**
- **+34.0dBm TYPICAL OUTPUT POWER**
- **12.0dB TYPICAL POWER GAIN AT 2GHz**
- **0.8dB TYPICAL NOISE FIGURE AT 2GHz**
- **+48dBm TYPICAL OUTPUT 3rd ORDER INTERCEPT POINT AT 2GHz**
- **0.5 X 4800 MICRON RECESSED “MUSHROOM” GATE**
- **Si₃N₄ PASSIVATION**
- **ADVANCED EPITAXIAL DOPING PROFILE PROVIDES HIGH POWER EFFICIENCY, LINEARITY AND RELIABILITY**

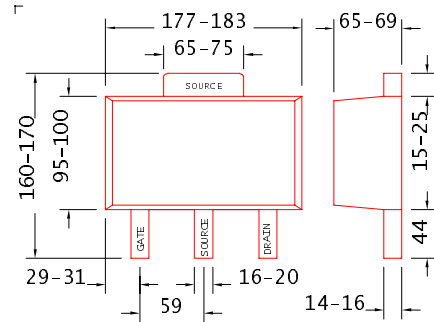

(Top View)

All Dimensions In Mils

Applications

- **Analog and Digital Wireless System**
- **HPA**

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression f = 2GHz V _{ds} =7V, I _{ds} =750mA	32.5	34.0		dBm
G_{1dB}	Gain at 1dB Compression f = 2GHz V _{ds} =7V, I _{ds} =750mA	10.0	12.0		dB
PAE	Power Added Efficiency at 1dB Compression V _{ds} =7V, I _{ds} =750mA f = 2GHz		45		%
NF	Noise Figure f = 2GHz V _{ds} =5V, I _{ds} =300mA V _{ds} =5-7V, I _{ds} =750mA		0.8 2.0		dB
IP3	Output 3rd Order Intercept Point f = 2GHz V _{ds} =5-7V, I _{ds} =750mA V _{ds} =5V, I _{ds} =300mA		48 39		dBm
I_{dss}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	880	1360	1760	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	560	720		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =14mA		-2.0	-3.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =4.8mA	-11	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =4.8mA	-7	-14		V
R_{th}	Thermal Resistance		14*		°C/W

* Overall R_{th} depends on case mounting.**MAXIMUM RATINGS AT 25°C**

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	12V	7V
V_{gs}	Gate-Source Voltage	-8V	-4V
I_{ds}	Drain Current	I _{dss}	1.2A
I_{gsf}	Forward Gate Current	120mA	20mA
P_{in}	Input Power	32dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-65/175°C	-65/150°C
P_t	Total Power Dissipation	10 W	8.4 W

Note: 1. Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054**Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com**SUNSTAR射頻通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376182 E-MAIL:szsss20@163.com



EFA480C-SOT89

DATA SHEET DC-4GHz Low Distortion GaAs Power FET

Typical Performance

S21 Distribution

Noise Figure & IP3

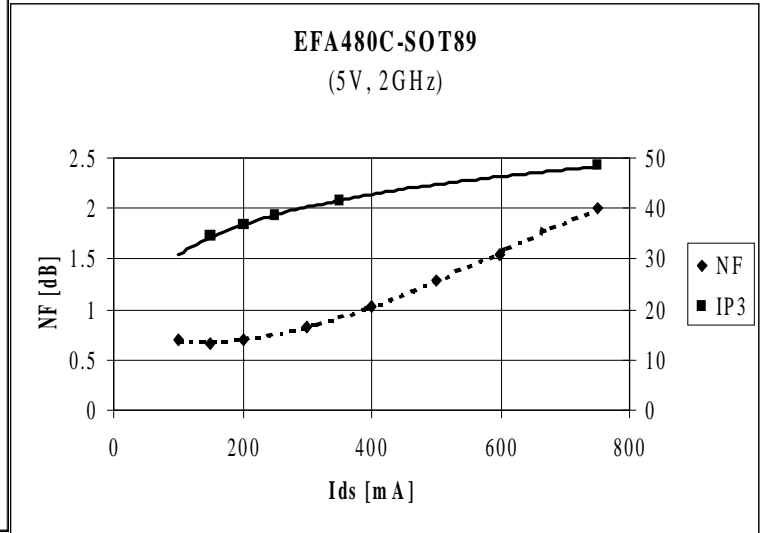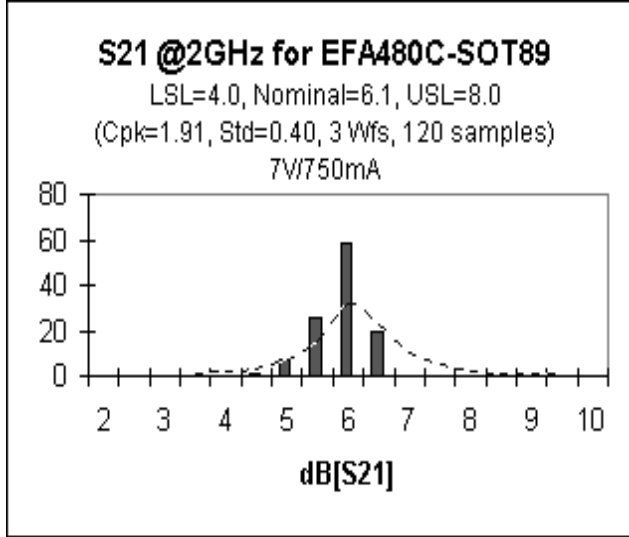

S-PARAMETERS

S-PARAMETERS

7V, 750mA									5V, 150mA								
Freq (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---		Freq (GHz)	--- S11 ---		--- S21 ---		--- S12 ---		--- S22 ---	
	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG		MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
0.1	0.914	-74.6	18.618	138.4	0.015	56.1	0.552	-166.3	0.1	0.953	-71.1	17.133	141.6	0.018	68.2	0.586	-167.0
0.2	0.898	-113.3	12.814	117.4	0.024	39.5	0.652	-169.9	0.2	0.929	-111.0	12.353	120.2	0.026	39.7	0.678	-170.2
0.3	0.898	-134.4	9.412	105.5	0.025	31.1	0.677	-174.6	0.3	0.916	-133.1	9.150	107.7	0.031	29.3	0.712	-174.9
0.4	0.897	-147.5	7.342	97.4	0.026	28.5	0.692	-177.9	0.4	0.908	-146.6	7.156	99.3	0.030	28.1	0.731	-178.2
0.5	0.893	-156.3	5.983	91.3	0.028	25.9	0.698	178.6	0.5	0.902	-155.7	5.838	93.1	0.033	27.1	0.742	178.3
1.0	0.886	179.0	3.095	70.9	0.034	25.3	0.686	168.9	1.0	0.886	179.2	3.037	72.8	0.039	24.0	0.736	168.3
1.5	0.831	161.0	2.625	55.6	0.052	23.7	0.616	153.0	1.5	0.828	161.0	2.596	57.9	0.059	21.8	0.676	152.7
2.0	0.826	146.7	2.013	40.8	0.062	20.0	0.614	143.4	2.0	0.822	146.4	2.002	43.6	0.070	17.8	0.673	142.9
2.5	0.818	133.2	1.680	26.4	0.074	13.7	0.602	133.9	2.5	0.812	132.9	1.671	29.8	0.083	11.0	0.662	133.2
3.0	0.806	119.3	1.463	11.3	0.087	4.9	0.587	122.7	3.0	0.799	119.0	1.465	14.9	0.097	2.6	0.647	121.7
3.5	0.808	103.3	1.303	-5.2	0.100	-5.5	0.570	109.6	3.5	0.800	103.0	1.313	-1.0	0.111	-8.0	0.626	108.6
4.0	0.797	85.9	1.142	-23.4	0.110	-18.7	0.579	92.5	4.0	0.790	85.6	1.154	-18.7	0.120	-21.8	0.632	91.7
4.5	0.812	69.0	0.967	-40.5	0.113	-31.5	0.602	75.1	4.5	0.806	68.8	0.982	-35.4	0.124	-34.2	0.651	74.5
5.0	0.836	53.9	0.816	-56.0	0.113	-43.2	0.652	61.1	5.0	0.830	54.0	0.831	-50.4	0.123	-46.1	0.693	60.9
5.5	0.856	41.4	0.687	-69.8	0.109	-53.7	0.685	50.8	5.5	0.851	41.4	0.706	-63.8	0.120	-56.5	0.721	50.4
6.0	0.859	30.1	0.589	-82.8	0.108	-63.8	0.705	41.3	6.0	0.855	30.2	0.611	-76.3	0.118	-66.2	0.733	41.0

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382