




EPA025A-70

DATA SHEET

High Efficiency Heterojunction Power FET

- NON-HERMETIC LOW COST CERAMIC 70mil PACKAGE
- +21.5dBm TYPICAL OUTPUT POWER
- 8.0dB TYPICAL POWER GAIN AT 18GHz
- TYPICAL 0.85dB NOISE FIGURE AND 11.0dB ASSOCIATED GAIN AT 12GHz
- 0.3 X 250 MICRON RECESSED “MUSHROOM” GATE
- Si₃N₄ PASSIVATION
- ADVANCED EPITAXIAL HETEROJUNCTION PROFILE PROVIDES EXTRA HIGH POWER EFFICIENCY, AND HIGH RELIABILITY

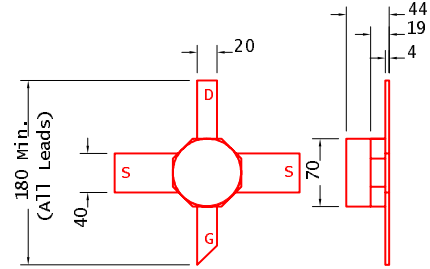

All Dimensions In mils.

ELECTRICAL CHARACTERISTICS (T_a = 25 °C)

SYMBOLS	PARAMETERS/TEST CONDITIONS	MIN	TYP	MAX	UNIT
P_{1dB}	Output Power at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{ds}	f=12GHz 19.5	f=18GHz 21.5		dBm
G_{1dB}	Gain at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{ds}	f=12GHz 9.5	f=18GHz 11.0		dB
PAE	Power Added Efficiency at 1dB Compression V _{ds} =6V, I _{ds} =50% I _{ds}	f=12GHz	47		%
NF	Noise Figure V _{ds} =2V, I _{ds} =15mA	f=12GHz	0.85		dB
G_a	Associated Gain V _{ds} =2V, I _{ds} =15mA	f=12GHz	11.0		dB
I_{ds}	Saturated Drain Current V _{ds} =3V, V _{gs} =0V	40	75	105	mA
G_m	Transconductance V _{ds} =3V, V _{gs} =0V	50	80		mS
V_p	Pinch-off Voltage V _{ds} =3V, I _{ds} =1.0mA		-1.0	-2.5	V
BV_{gd}	Drain Breakdown Voltage I _{gd} =1.0mA	-9	-15		V
BV_{gs}	Source Breakdown Voltage I _{gs} =1.0mA	-6	-14		V
R_{th}	Thermal Resistance		370*		°C/W

* Overall R_{th} depends on case mounting.

MAXIMUM RATINGS AT 25°C

SYMBOLS	PARAMETERS	ABSOLUTE ¹	CONTINUOUS ²
V_{ds}	Drain-Source Voltage	10V	6V
V_{gs}	Gate-Source Voltage	-6V	-3V
I_{ds}	Drain Current	I _{ds}	50mA
I_{gsf}	Forward Gate Current	12mA	2mA
P_{in}	Input Power	18dBm	@ 3dB Compression
T_{ch}	Channel Temperature	175°C	150°C
T_{stg}	Storage Temperature	-65/175°C	-65/150°C
P_t	Total Power Dissipation	370mW	310mW

Note: 1 Exceeding any of the above ratings may result in permanent damage.

2. Exceeding any of the above ratings may reduce MTTF below design goals.

Excelics Semiconductor, Inc., 2908 Scott Blvd., Santa Clara, CA 95054
Phone: (408) 970-8664 Fax: (408) 970-8998 Web Site: www.excelics.com

EPA025A-70

DATA SHEET

High Efficiency Heterojunction Power FET

S-PARAMETERS

6V, 1/2 Idss

S-PARAMETERS

2V, 15mA

6V, 1/2 Idss									2V, 15mA								
FREQ	S11		S21		S12		S22		FREQ	S11		S21		S12		S22	
(GHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG	(GHz)	MAG	ANG	MAG	ANG	MAG	ANG	MAG	ANG
1.0	0.963	-26.2	6.488	155.5	0.015	75.3	0.795	-12.4	1.0	1.014	-22.6	8.052	156.7	0.030	72.3	0.546	-27.0
2.0	0.886	-51.2	5.91	132.5	0.026	60.1	0.76	-25.4	2.0	0.927	-42.6	5.927	138.8	0.043	62.6	0.591	-31.6
3.0	0.799	-73.4	5.223	112.3	0.033	49.6	0.729	-37	3.0	0.861	-62.4	5.434	120.8	0.058	49.9	0.564	-45.7
4.0	0.716	-94.3	4.709	94.4	0.038	44.2	0.707	-45.9	4.0	0.801	-79.1	4.978	104.7	0.069	41.5	0.524	-57.2
5.0	0.638	-113.8	4.296	77.9	0.042	39.6	0.68	-54.4	5.0	0.736	-95.5	4.683	89.0	0.080	31.5	0.466	-69.3
6.0	0.579	-129.1	3.913	62.7	0.045	37.7	0.651	-65.5	6.0	0.657	-111.4	4.309	73.9	0.086	22.2	0.437	-84.8
7.0	0.517	-145.7	3.559	47.9	0.047	34.2	0.637	-76	7.0	0.589	-129.0	3.951	60.4	0.091	15.0	0.427	-91.9
8.0	0.462	-161.5	3.288	34.4	0.048	33.9	0.619	-84.4	8.0	0.549	-148.7	3.736	46.7	0.097	6.7	0.399	-99.8
9.0	0.424	172.2	3.097	19.9	0.055	34.3	0.627	-90.9	9.0	0.531	-155.8	3.519	33.3	0.101	-3.0	0.276	-120.8
10.0	0.409	148.3	2.9	4.8	0.064	31	0.623	-102.3	10.0	0.472	-170.6	3.390	20.1	0.102	-6.0	0.294	-144.1
11.0	0.381	134.7	2.794	-9.1	0.074	25.6	0.62	-118	11.0	0.427	160.9	3.173	6.5	0.106	-14.1	0.330	-145.0
12.0	0.366	115.9	2.692	-23.3	0.086	19.6	0.629	-132.5	12.0	0.443	138.7	3.007	-6.3	0.107	-21.1	0.291	-146.4
13.0	0.429	92.8	2.521	-38.3	0.098	10.5	0.618	-144.4	13.0	0.484	128.8	2.870	-20.5	0.114	-29.6	0.254	168.5
14.0	0.483	73.8	2.324	-53.1	0.106	0.1	0.612	-157.7	14.0	0.443	112.4	2.679	-34.6	0.113	-39.6	0.304	139.3
15.0	0.488	56.6	2.209	-69.6	0.115	-12	0.633	-178.6	15.0	0.464	88.7	2.434	-47.9	0.109	-46.4	0.293	145.2
16.0	0.506	38.2	2.089	-86.7	0.123	-25.8	0.642	160.4	16.0	0.514	66.6	2.344	-61.5	0.110	-54.6	0.255	144.9
17.0	0.52	26.1	1.874	-99.9	0.124	-33.2	0.607	149.2	17.0	0.532	68.8	2.277	-75.2	0.116	-63.1	0.339	91.6
18.0	0.559	17.4	1.823	-112.1	0.142	-46.2	0.673	136.7	18.0	0.532	50.3	2.024	-87.9	0.113	-70.5	0.411	89.7
19.0	0.579	-2.4	1.637	-128.6	0.132	-60.9	0.687	115.8	19.0	0.573	35.5	1.955	-98.2	0.118	-80.0	0.347	88.4
20.0	0.625	-15.5	1.561	-144.3	0.135	-73.4	0.744	98.8	20.0	0.634	21.2	1.904	-111.2	0.113	-91.2	0.314	77.2
21.0	0.622	-23.3	1.49	-159.8	0.141	-86.7	0.733	86.7	21.0	0.587	15.3	1.823	-129.0	0.114	-103.3	0.483	47.3
22.0	0.583	-35.7	1.399	-173.6	0.144	-99.4	0.738	76.6	22.0	0.585	7.8	1.672	-139.1	0.110	-110.5	0.529	52.6
23.0	0.605	-55.5	1.27	170.1	0.141	-115.7	0.727	58.1	23.0	0.628	-10.7	1.658	-153.8	0.117	-124.2	0.375	43.3
24.0	0.639	-69.2	1.179	152.8	0.144	-132.1	0.73	38.8	24.0	0.642	-26.5	1.611	-172.2	0.120	-140.5	0.404	15.5
25.0	0.571	-84.8	1.157	135.4	0.156	-149.3	0.736	25.1	25.0	0.572	-40.1	1.491	171.7	0.115	-154.2	0.553	6.6
26.0	0.554	-106.7	1.153	118.9	0.174	-164.6	0.733	13.3	26.0	0.623	-43.2	1.455	160.9	0.124	-162.8	0.465	5.2

EPA025A-70				
Noise Parameters				
Vds=2V, Ids=15mA				
Freq.	Popt		Nfmin	Rn/50
(GHz)	(MAG)	(ANG)	(dB)	
2	0.73	25	0.37	0.22
4	0.64	55	0.46	0.18
6	0.49	81	0.56	0.14
8	0.42	107	0.64	0.11
10	0.32	135	0.76	0.08
12	0.26	173	0.88	0.08
14	0.28	-156	1.08	0.12
16	0.32	-103	1.31	0.24
18	0.37	-55	1.51	0.37
20	0.44	-25	1.65	0.51
22	0.44	-15	1.88	0.59
24	0.46	25	2.05	0.69
26	0.44	39	2.29	0.49

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382