

T7250, T7254, T7256, T7258, T7001 thru T7013, T9250, T9254, T9256, T9258, T9301 thru T9313

Extended Temperature/COTS

5X7 mm Surface Mount




Owing to their small size, light weight, and rugged characteristics, these 3.3V HCMOS extended temperature/COTS oscillators fulfill tasks not previously feasible. They are used in applications that take advantage of their extended temperature range and high performance. Twenty six different models (with and without tristate) cover -55°C to +200°C operation and provide frequency selection from 20KHz to 100MHz. They combine excellent long-term reliability, loading characteristics, and superior startup performance.

Features


- Tiny 5X7 SMD form factor
- Hermetically sealed for rugged environmental conditions
- Extremely wide operating temperature range accommodates harsh environments
- All crystals are processed in-house with tight angle control to assure best frequency-temperature characteristics
- All units are vacuum baked before sealing at 175°C for 16 hours to eliminate moisture traces and pre-age units for superior stability
- Tristate feature optional
- Equivalent 5V parts are available in series T1254

Applications

Any electronic circuit requiring 3.3V HCMOS clocking that is exposed to very high or very low temperatures such as oil drilling or weather observation equipment

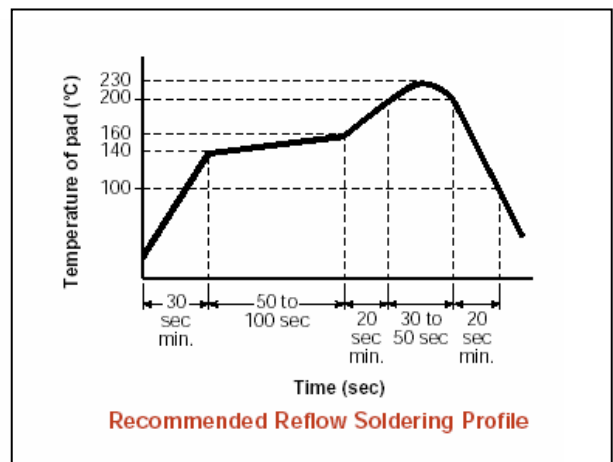

Non-Tristate Model	Tristate Model	Frequency Stability	Temperature
T7250	T9250	+/-75ppm	-40 to + 85°C
T7254	T9254	+/-50ppm	0 to + 175°C
T7256	T9256	+/-75ppm	-55 to + 85°C
T7258	T9258	+/-100ppm	-40 to + 85°C
T7001	T9301	+/-500ppm	-55 to + 200°C
T7002	T9302	+/-500ppm	0 to 200°C
T7003	T9303	+/-250ppm	-55 to + 200°C
T7004	T9304	+/-250ppm	0 to 200°C
T7005	T9305	+/-250ppm	-55 to 175°C
T7006	T9306	+/-250ppm	0 to 175°C
T7007	T9307	+/-150ppm	-55 to 175°C
T7008	T9308	+/-150ppm	0 to 175°C
T7009	T9309	+/-100ppm	-55 to 125°C
T7010	T9310	+/-50ppm	-55 to +85°C
T7011	T9311	+/-25ppm	-55 to + 85°C
T7012	T9312	+/-75ppm	-55 to +125°C
T7013	T9313	+/-50ppm	-55 to +125°C

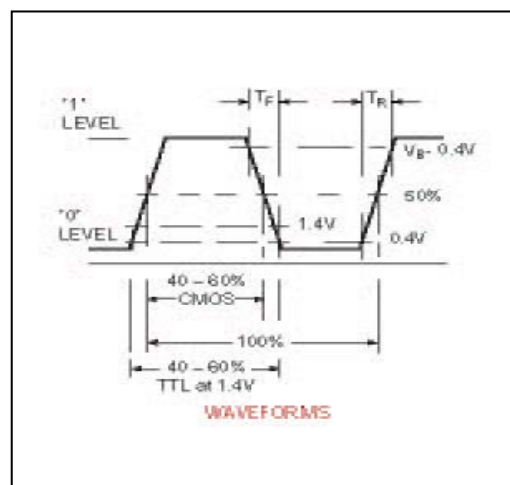

T7250, T7254, T7256, T7258, T7001 thru T7013, T9250, T9254, T9256, T9258, T9301 thru T9313

Extended Temperature/COTS

5X7 mm Surface Mount

ELECTRICAL SPECIFICATIONS

Frequency 20 KHz to 100MHz
Frequency Stability Includes calibration at 25°C, operating temperature, change of input voltage, change of load, shock and vibration.

	MIN	TYP	MAX	UNITS
Input Voltage, V_{DD}	3.0	3.3	3.6	volts
Input Current			4.0	mA
Output	All units, full range			
Loads	3 TLL loads, or 10LSTTL loads, or 15 pf CMOS			

Rise and Fall Time

TTL and LSTTL from 0.4 to 2.4V	8	ns
CMOS, 15pf, from 0.4 to (V _{DD} -0.4) V	8	ns
CMOS, 30pf, from 0.4 to (V _{DD} -0.4) V	10	ns

Symmetry

TTL and LSTTL @ 1.4V	40/60	percent
CMOS @50% V _{DD}	40/60	percent

Aging


First year	3	ppm
After first year	1	ppm/yr

ENVIRONMENTAL SPECIFICATIONS

Shock-1000 Gs, 0.35 ms, ½ sine wave, 3 shocks in each plane
Vibration-10-2000 Hz of .06" d.a. or 20Gs, whichever is less
Humidity-Resistant to 85° R.H. at 85°C


MECHANICAL SPECIFICATIONS

Gross Leak-Each unit checked in 125°C fluorocarbon
Fine Leak-Mass spectrometer leak rate less than 2X10⁻⁸ atm, cc/sec of helium
Case-Hermetically sealed ceramic package
Pads-60 microinch of gold over nickel
Marking-Epoxy ink or laser inscribed
Resistance to Solvents-MIL STD 202, Method 215

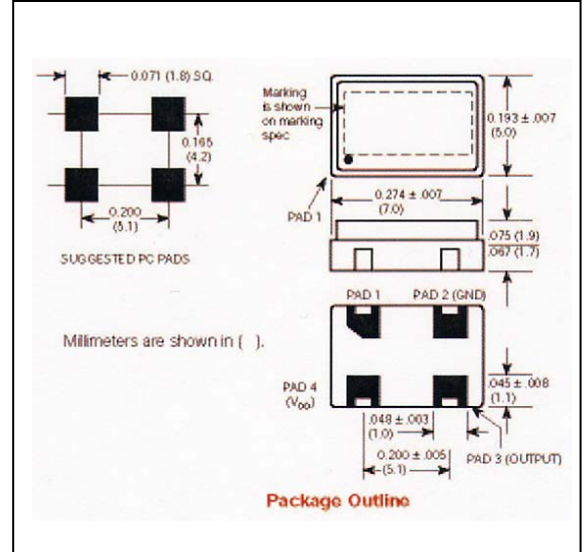


MARKING SPECIFICATION

The format for the marking is:

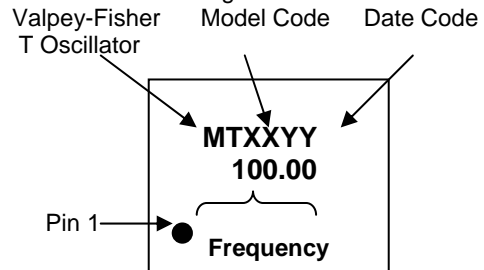

HOW TO ORDER

For Part Number, put package type before model number, and add frequency in MHz, for example:

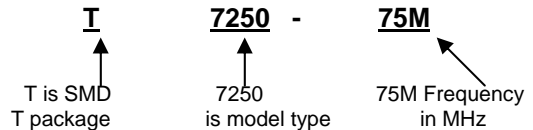

Connections

Pad	Non-Tristate Models	Tristate Models
1.	Not Used	Floating or "1": Oscillator runs Ground or "0": Disable or Tristate
2.	Ground and Case	Ground and Case
3.	Output	Output
4.	+3.3 V, V _{DD}	+3.3 V, V _{DD}

Rev. 0706



SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382