

M1280 Series
Crystal Oscillators HCMOS/TTL 5V
Thru-Hole/Gull Wing; Commercial: 0° to 70°
Fixed Frequency, 1 KHz to 175 MHz

Features


- Frequency from 1 KHz to 175 MHz
- Choice of thru-hole packages
 - DIL Full Size ("M")
 - Half Size DIL ("H")
 - Gull Wing SMD
- Tristate and "Hard Zero" options accommodate ATE
- Very low power when tristated
- Start up time less then 5 ms
- Stability options from +/-100 ppm to +/- 20 ppm
- Guaranteed start-up with ramping DC Supply
- 45/55 symmetry available
- Internal bypass capacitor delivers superior waveform characteristics
- Jitter from positive edge to positive edge is 50 ps RMS max

Typical Applications

- Any thru-hole PCB that requires a standard HCMOS/TTL 5V clock, including microprocessors and microcontrollers

Description

Valpey Fisher's thru-hole oscillators embody 25 years of design and manufacturing know-how. They are available in full -size and half size packages, all hermetically sealed with welded stainless steel cover. These 5V thru-hole oscillators are designed for everyday stresses of 0°C to 70°C operation and extended frequency selection of 1 KHz to 175 MHz. Higher (5V) operation ensures superior output loading and faster rise/fall times characteristics.

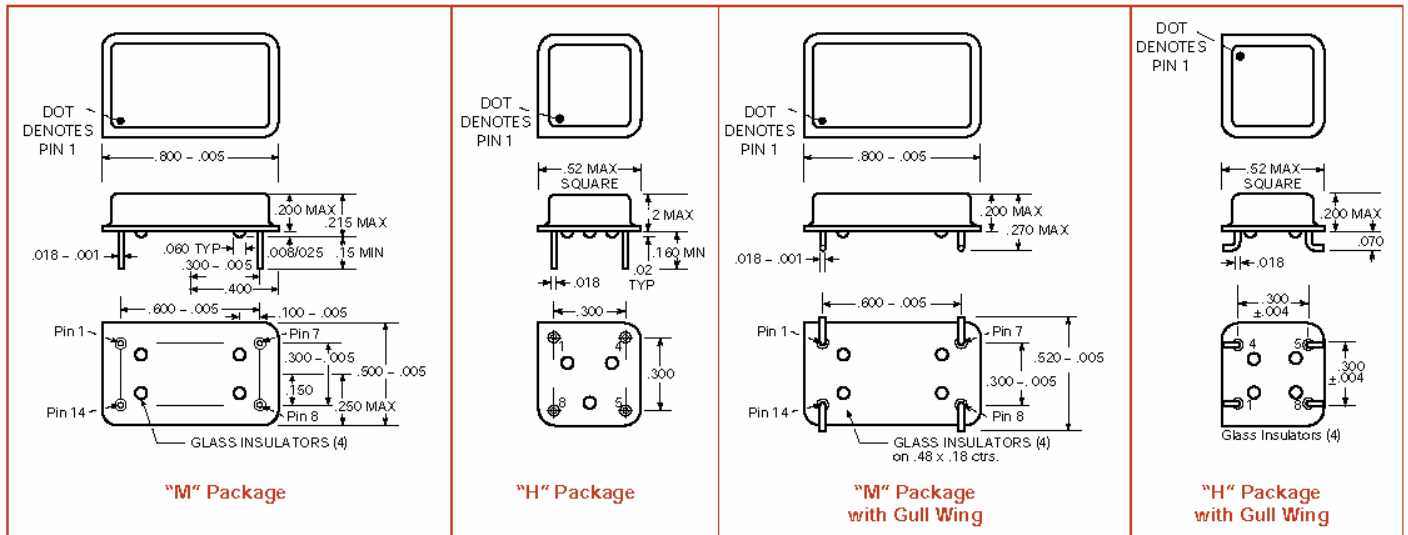

M1280 Series

Crystal Oscillators HCMOS/TTL 5V

Thru-Hole/Gull Wing; Commercial: 0° to 70°C

Fixed Frequency, 1 KHz to 175 MHz


ELECTRICAL SPECIFICATIONS

Frequency Range

Fixed Output 1 KHz to 175 MHz
Tristate 32.768 to 175 MHz
"Hard Zero" 62.5 KHz to 125 MHz

Frequency Stability

Includes calibration at 25°C, operating temperature, change of input voltage, change of load, shock and vibration

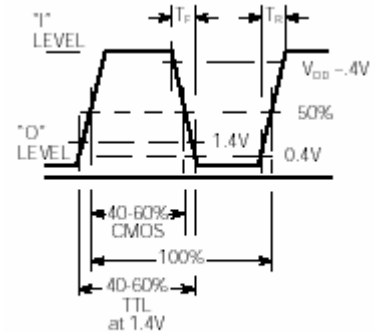

WAVEFORMS

	MIN	TYP	MAX	UNITS
Input Voltage, V_{DD}	4.50	5.0	5.50	volts

Input Current,

1 KHz to 10 MHz	10	20	mA
10.1 to 25 MHz	20	35	mA
25.1 to 50 MHz	25	45	mA
50.1 to 75 MHz	40	55	mA
75.1 to 125 MHz	50	60	mA
100.1 to 175 MHz	55	65	mA

Output Levels,

"0" Level, sinking 16 mA			0.4	volts
"1" Level, TTL	2.4	4.6		volts
CMOS, sourcing 8 mA	V _{DD} -4			volts

Rise and Fall Times,

TTL, from 0.8 to 2.4V	2.4	4	ns
HCMOS, 15 pf, 20 to 80%			
1 KHz to 75 MHz	2.5	4	ns
75.1 to 175 MHz	1.5	2	ns
HCMOS, 30 pf, 20 to 80%			
1 KHz to 125MHz	4.0	6	ns
HCMOS, 50 pf, 20 to 80%			
1KHz to 75 MHz	4.0	6	ns

Jitter, Positive Edge to positive edge

50 Ps RMS

Symmetry

10 TTL, @ 1.4V	45/55	40/60	percent
Depending on model		or 45/55	percent
HCMOS, @ 50%	45/55	40/60	percent
Depending on model		or 45/55	percent

Aging

First year	3	ppm
After first year	1	ppm/yr

Input Requirements for Pin 1:

"1": On - Pin 1 may float or 2.4V min., sourcing 400 microAmp
"0": Disable or Tristate - Pin 1 requires 0.4V, sinking 400 microAmp

	FULL SIZE	HALF SIZE	M1280's H1280's	M1290's,"Hard-Zero" M3290's or Tristate for 3290's
PIN	1	1	NOT USED	Floating or "1": Oscillator runs Ground or "0": Hard "0" for M1290's or Tristate for 3290's
PIN	7	4	Ground and Case	
PIN	8	5	Output	
PIN	14	8	5V, V _{DD}	

FIXED OUTPUT		TRISTATE		HARD ZERO	Frequency Stability
40/60 Symmetry	45/55 Symmetry	40/60 Symmetry	45/55 Symmetry	40/60 Symmetry	
1280	1286	3290	3296	M1290	+/-100ppm
1281	1991	3291	3991	M1291	+/-25ppm
1282	1992	3292	3992	M1292	+/-50ppm
1288	1998	3298	3998	M1298	+/-20ppm
1289	1999	3299	3999	M1299	+/-32ppm

M1280 Series
Crystal Oscillators HCMOS/TTL 5V
Thru-Hole/Gull Wing; Commercial: 0° to 70°C
Fixed Frequency, 1 KHz to 175 MHz

ENVIRONMENTAL SPECIFICATIONS

Temperature

Operating 0° to 70°C
Storage -55° to +125°C

Shock- 1000 Gs, 0.35 ms, ½ sine wave, 3 shocks in each plane

Vibration- 10-2000 Hz of .06" d.a. or 20 Gs, whichever is less

Humidity- Resistant to 85° R.H. at 85°C

MECHANICAL SPECIFICATIONS

Leak- MIL STD 883, Method 1014, Condition A1

Pins- Kovar, nickel plated with 60/40 solder coat

Bend test- Will withstand two bends of 90° from reference

Header- Steel, with nickel plate

Case- Stainless steel, type 304

Marking- Epoxy ink or laser engraved

Resistance to Solvents- MIL STD 202, Method 215

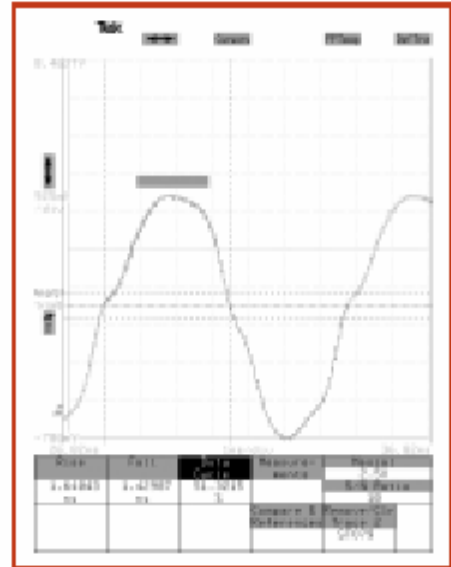


Fig. 1 M1286-148.26M with 10pf load
Duty Cycle is 51.3% at $V_{DD}/2$

HOW TO ORDER

For Part Number, put package type before model number, and add frequency in MHz, for example:


H 3290 - 66.66 M

"M" is full size DIL
"H" is half size DIL

"3290"
is model
type

"66.66 M"
frequency
in MHz

Leave blank
for straight leads
Add "G" for
gullwing

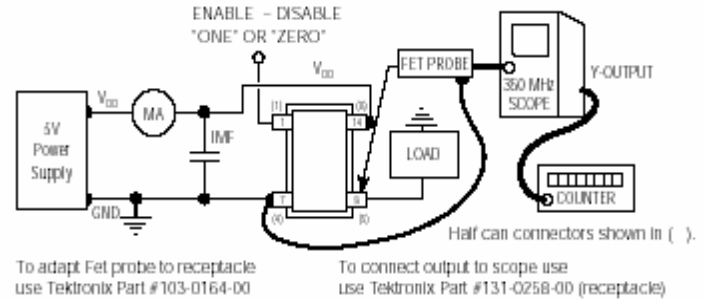

To adapt Fet probe to receptacle
use Tektronix Part #103-0164-00

To connect output to scope use
use Tektronix Part #131-0258-00 (receptacle)

ALL OSCILLATORS HAVE INTERNAL BYPASS CAPACITORS

TEST CIRCUIT

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382