


WIDE BAND & HIGH SLEWRATE HEX OPERATIONAL AMPLIFIER

■ GENERAL DESCRIPTION


The NJM2116 is an wide band, high slew rate, low operating current, and low operating voltage, hex operational amplifiers.

It is applicable to active filter, small consumption portable electrical equipment, and high speed analog signal processing.

■ PACKAGE OUTLINE



NJM2116V




NJM2116M

■ FEATURES

- Hex Circuit
- Low Operating Voltage ($\pm 1.35V \sim \pm 6V$)
- Wide Band (200MHz typ.)
- High Slew Rate (45V/ μs typ.)
- Low Operating Current (3.4mA typ.)
- Package Outline SSOP20,DMP20
- Bipolar Technology

■ PIN CONFIGURATION

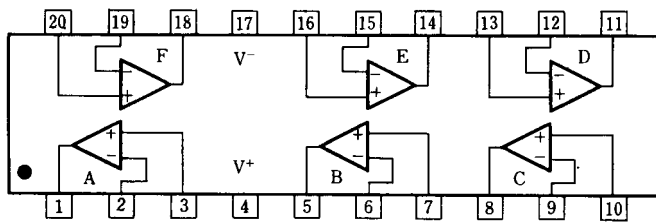


NJM2116M
NJM2116V

PIN FUNCTION

- | | |
|------------------|-------------------|
| 1.A OUTPUT | 11.D OUTPUT |
| 2.A -INPUT | 12.D -INPUT |
| 3.A +INPUT | 13.D +INPUT |
| 4.V ⁺ | 14.E OUTPUT |
| 5.B OUTPUT | 15.E -INPUT |
| 6.B -INPUT | 16.E +INPUT |
| 7.B +INPUT | 17.V ⁻ |
| 8.C OUTPUT | 18.F OUTPUT |
| 9.C -INPUT | 19.F -INPUT |
| 10.C +INPUT | 20.F +INPUT |

■ EQUIVALENT CIRCUIT (1/6 Shown)

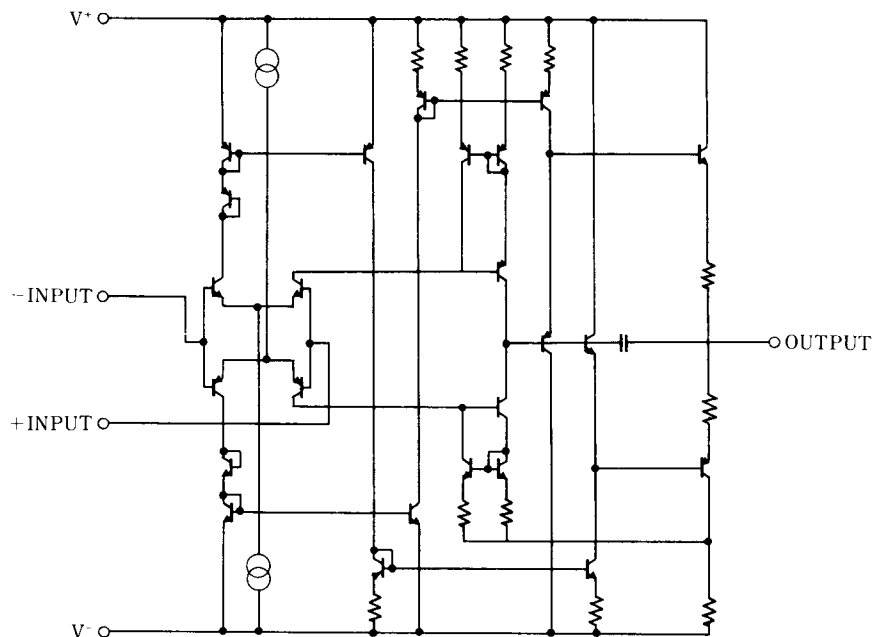

NJM2116

■ ABSOLUTE MAXIMUM RATINGS

(Ta=25°C)

| PARAMETER | SYMBOL | RATINGS | UNIT |
|-----------------------------|-----------|---------------------------------|------|
| Supply Voltage | V^+V^- | ± 6.75 | V |
| Differential Input Voltage | V_{ID} | ± 3 | V |
| Power Dissipation | P_D | (DMP20) 300 (SSOP20) 300 | mW |
| Operating Temperature Range | T_{opr} | -40~+85 | °C |
| Storage Temperature Range | T_{stg} | -50~+125 | °C |

■ ELECTRICAL CHARACTERISTICS


($V^+V^- = \pm 2.5V, Ta = 25^\circ C$)

| PARAMETER | SYMBOL | TEST CONDITION | MIN. | TYP. | MAX. | UNIT |
|---------------------------------|-----------|-----------------------------|------------|------------|------------|------------|
| Operating Voltage | V^+V^- | | ± 1.35 | ± 2.50 | ± 6.00 | V |
| Input Offset Voltage | V_{IO} | $R_S = 0\Omega$ | - | 1.0 | 5.0 | mV |
| Input Bias Current | I_B | | - | 0.5 | 2.0 | μA |
| Input Offset Current | I_{IO} | | - | 20 | 200 | nA |
| Large Signal Voltage Gain | A_V | | 65 | 75 | - | dB |
| Input Common Mode Voltage Range | V_{ICM} | | ± 1.2 | ± 1.5 | - | V |
| Common Mode Rejection Ratio | CMR | $-1V \leq V_{cm} \leq +1V$ | 45 | 60 | - | dB |
| Supply Voltage Rejection Ratio | +SVR | | 50 | 60 | - | dB |
| | -SVR | | 70 | 80 | - | dB |
| Maximum Output Voltage Swing | V_{OM} | $R_L = 1k\Omega$ | 1.1 | 1.4 | - | V |
| | | | -1.2 | -0.9 | - | V |
| Operating Current | I_{CC} | $R_L = \infty$ (all Amp.) | - | 3.4 | 4.5 | mA |
| Slew Rate | SR | $A_V = 0dB$ | - | 45 | - | V/ μs |
| Gain Bandwidth Product | GB | 60dB • 500kHz | 120 | 200 | - | MHz |
| Phase Margin | Φ_M | 40dB | - | 25 | - | deg. |
| Unity Gain Bandwidth | f_T | 40dB | - | 40 | - | MHz |

■ TYPICAL CHARACTERISTICS


Total Harmonic Distortion vs. Output Voltage

($V^+/V^- = \pm 2.5V$, Gain=20dB, $R_L = 2k\Omega$)

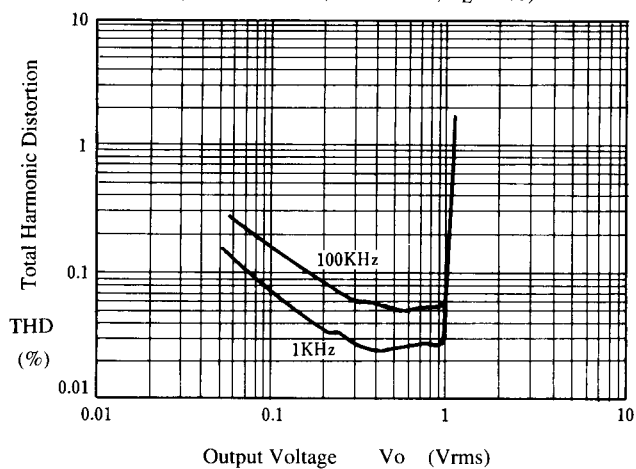


Maximum Output Voltage vs. Output Sink Current

($V^+/V^- = \pm 2.5V$, $T_a = 25^\circ C$)

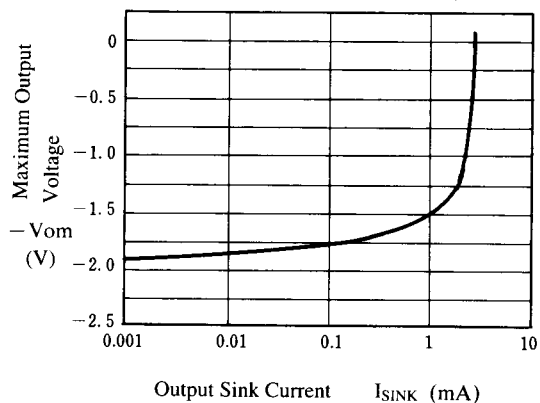

Maximum Output Voltage vs. Output Source Current


($V^+/V^- = \pm 2.5V$, $T_a = 25^\circ C$)

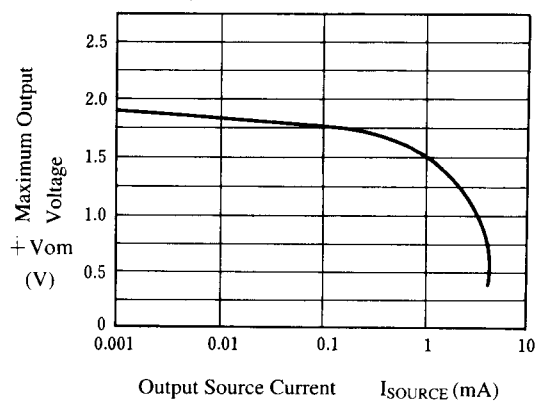

■ TYPICAL CHARACTERISTICS


Operating Current vs. Temperature

($V^+/V^- = \pm 2.5V$)

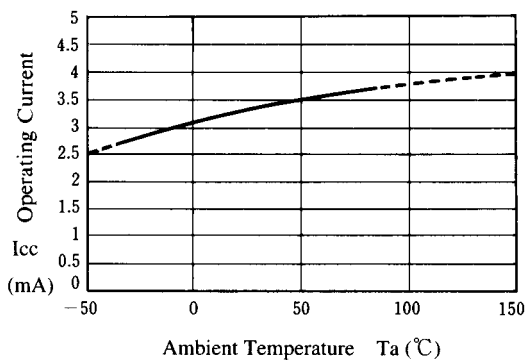


Input Offset Voltage vs. Temperature

($V^+/V^- = \pm 2.5V$)

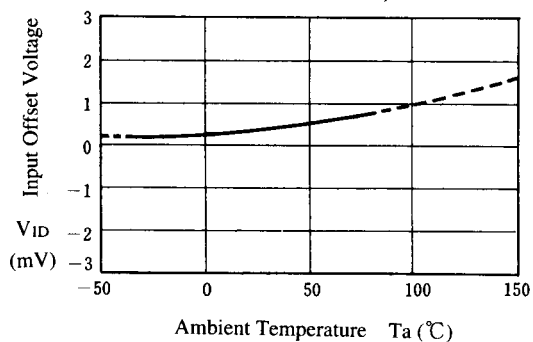


Voltage Gain Phase Shift vs. Frequency

($V^+/V^- = \pm 2.5V$, $R_L = 2k\Omega$, $C_L = 10pF$, 40dBamp, $T_a = 25^\circ C$)

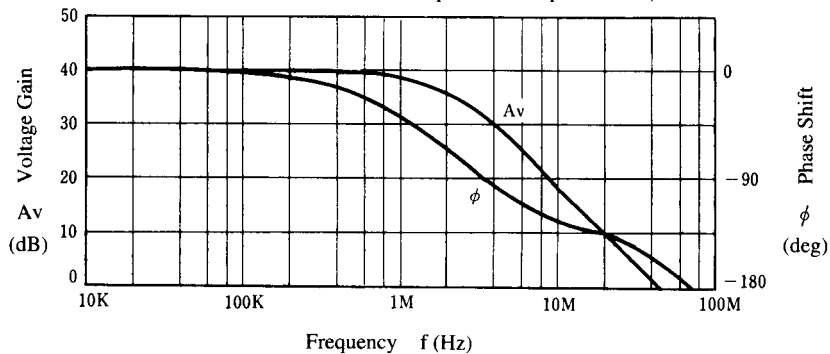

Pulse Response

($V^+/V^- = \pm 2.5V$, $R_L = 2k\Omega$, $C_L = 10pF$, $A_v = 0dB$, 40dBamp, $T_a = 25^\circ C$)

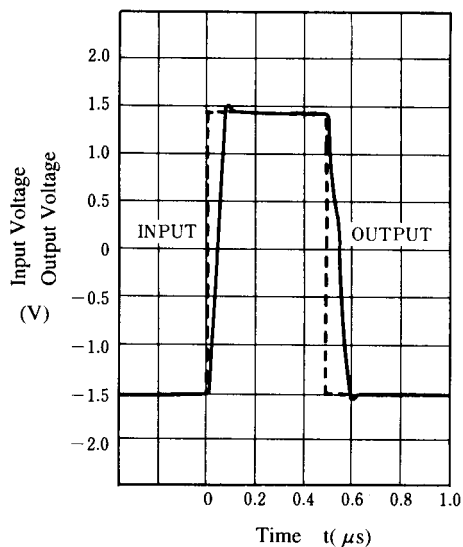

[CAUTION]

The specifications on this databook are only given for information, without any guarantee as regards either mistakes or omissions. The application circuits in this databook are described only to show representative usages of the product and not intended for the guarantee or permission of any right including the industrial rights.