

To all our customers

---

## **Regarding the change of names mentioned in the document, such as Hitachi Electric and Hitachi XX, to Renesas Technology Corp.**

---

The semiconductor operations of Mitsubishi Electric and Hitachi were transferred to Renesas Technology Corporation on April 1st 2003. These operations include microcomputer, logic, analog and discrete devices, and memory chips other than DRAMs (flash memory, SRAMs etc.) Accordingly, although Hitachi, Hitachi, Ltd., Hitachi Semiconductors, and other Hitachi brand names are mentioned in the document, these names have in fact all been changed to Renesas Technology Corp. Thank you for your understanding. Except for our corporate trademark, logo and corporate statement, no changes whatsoever have been made to the contents of the document, and these changes do not constitute any alteration to the contents of the document itself.

Renesas Technology Home Page: <http://www.renesas.com>

Renesas Technology Corp.  
Customer Support Dept.  
April 1, 2003

## Cautions

Keep safety first in your circuit designs!

1. Renesas Technology Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage.

Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (i) placement of substitutive, auxiliary circuits, (ii) use of nonflammable material or (iii) prevention against any malfunction or mishap.

Notes regarding these materials

1. These materials are intended as a reference to assist our customers in the selection of the Renesas Technology Corporation product best suited to the customer's application; they do not convey any license under any intellectual property rights, or any other rights, belonging to Renesas Technology Corporation or a third party.
2. Renesas Technology Corporation assumes no responsibility for any damage, or infringement of any third-party's rights, originating in the use of any product data, diagrams, charts, programs, algorithms, or circuit application examples contained in these materials.
3. All information contained in these materials, including product data, diagrams, charts, programs and algorithms represents information on products at the time of publication of these materials, and are subject to change by Renesas Technology Corporation without notice due to product improvements or other reasons. It is therefore recommended that customers contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor for the latest product information before purchasing a product listed herein.  
The information described here may contain technical inaccuracies or typographical errors. Renesas Technology Corporation assumes no responsibility for any damage, liability, or other loss rising from these inaccuracies or errors.  
Please also pay attention to information published by Renesas Technology Corporation by various means, including the Renesas Technology Corporation Semiconductor home page (<http://www.renesas.com>).
4. When using any or all of the information contained in these materials, including product data, diagrams, charts, programs, and algorithms, please be sure to evaluate all information as a total system before making a final decision on the applicability of the information and products. Renesas Technology Corporation assumes no responsibility for any damage, liability or other loss resulting from the information contained herein.
5. Renesas Technology Corporation semiconductors are not designed or manufactured for use in a device or system that is used under circumstances in which human life is potentially at stake. Please contact Renesas Technology Corporation or an authorized Renesas Technology Corporation product distributor when considering the use of a product contained herein for any specific purposes, such as apparatus or systems for transportation, vehicular, medical, aerospace, nuclear, or undersea repeater use.
6. The prior written approval of Renesas Technology Corporation is necessary to reprint or reproduce in whole or in part these materials.
7. If these products or technologies are subject to the Japanese export control restrictions, they must be exported under a license from the Japanese government and cannot be imported into a country other than the approved destination.  
Any diversion or reexport contrary to the export control laws and regulations of Japan and/or the country of destination is prohibited.
8. Please contact Renesas Technology Corporation for further details on these materials or the products contained therein.

---

# HM66AQB36102/HM66AQB18202

## HM66AQB9402

36-Mbit QDR™II SRAM  
2-word Burst

**RENESAS**

ADE-203-1364 (Z)

Preliminary

Rev. 0.0

Dec. 11, 2002

---

### Description

The HM66AQB36102 is a 1,048,576-word by 36-bit, the HM66AQB18202 is a 2,097,152-word by 18-bit, and the HM66AQB9402 is a 4,194,304-word by 9-bit synchronous quad data rate static RAM fabricated with advanced CMOS technology using full CMOS six-transistor memory cell. It integrates unique synchronous peripheral circuitry and a burst counter. All input registers controlled by an input clock pair (K and  $\bar{K}$ ) and are latched on the positive edge of K and  $\bar{K}$ . These products are suitable for applications which require synchronous operation, high speed, low voltage, high density and wide bit configuration. These products are packaged in 165-pin plastic FBGA package.

Note: QDR RAMs and Quad Data Rate RAMs comprise a new family of products developed by Cypress Semiconductor, IDT, Micron Technology, Inc., NEC, Samsung, and Hitachi.

Preliminary: The specifications of this device are subject to change without notice. Please contact your nearest Hitachi's Sales Dept. regarding specifications.

---

## HM66AQB36102/18202/9402

---

### Features

- 1.8 V  $\pm$  0.1 V power supply for core ( $V_{DD}$ )
- 1.4 V to  $V_{DD}$  power supply for I/O ( $V_{DDQ}$ )
- DLL circuitry for wide output data valid window and future frequency scaling
- Separate independent read and write data ports with concurrent transactions
- 100% bus utilization DDR read and write operation
- Two-tick burst for low DDR transaction size
- Two input clocks (K and  $\bar{K}$ ) for precise DDR timing at clock rising edges only
- Two output clocks (C and  $\bar{C}$ ) for precise flight time and clock skew matching-clock and data delivered together to receiving device
- Internally self-timed write control
- Clock-stop capability with  $\mu$ s restart
- User programmable impedance output
- Fast clock cycle time: 4.0 ns (250 MHz)/5.0 ns (200 MHz)/6.0 ns (167 MHz)/7.5 ns (133 MHz)
- Simple control logic for easy depth expansion
- JTAG boundary scan

### Ordering Information

Type No.	Organization	Cycle time	Clock frequency	Package
HM66AQB36102BP-40	1-M word	4.0 ns	250 MHz	Plastic FBGA 165-pin (BP-165A)
HM66AQB36102BP-50	$\times$ 36-bit	5.0 ns	200 MHz	
HM66AQB36102BP-60		6.0 ns	167 MHz	
HM66AQB36102BP-75		7.5 ns	133 MHz	
HM66AQB18202BP-40	2-M word	4.0 ns	250 MHz	
HM66AQB18202BP-50	$\times$ 18-bit	5.0 ns	200 MHz	
HM66AQB18202BP-60		6.0 ns	167 MHz	
HM66AQB18202BP-75		7.5 ns	133 MHz	
HM66AQB9402BP-40	4-M word	4.0 ns	250 MHz	
HM66AQB9402BP-50	$\times$ 9-bit	5.0 ns	200 MHz	
HM66AQB9402BP-60		6.0 ns	167 MHz	
HM66AQB9402BP-75		7.5 ns	133 MHz	

## HM66AQB36102/18202/9402

### Pin Arrangement (HM66AQB36102) 165PIN-BGA

	1	2	3	4	5	6	7	8	9	10	11
A	CQ	V <sub>SS</sub>	NC	W	BW2	K	BW1	R	SA	NC	CQ
B	Q27	Q18	D18	SA	BW3	K	BW0	SA	D17	Q17	Q8
C	D27	Q28	D19	V <sub>SS</sub>	SA	SA	SA	V <sub>SS</sub>	D16	Q7	D8
D	D28	D20	Q19	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	Q16	D15	D7
E	Q29	D29	Q20	V <sub>DDQ</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>DDQ</sub>	Q15	D6	Q6
F	Q30	Q21	D21	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	D14	Q14	Q5
G	D30	D22	Q22	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	Q13	D13	D5
H	DOFF	V <sub>REF</sub>	V <sub>DDQ</sub>	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	V <sub>DDQ</sub>	V <sub>REF</sub>	ZQ
J	D31	Q31	D23	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	D12	Q4	D4
K	Q32	D32	Q23	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	Q12	D3	Q3
L	Q33	Q24	D24	V <sub>DDQ</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>DDQ</sub>	D11	Q11	Q2
M	D33	Q34	D25	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	D10	Q1	D2
N	D34	D26	Q25	V <sub>SS</sub>	SA	SA	SA	V <sub>SS</sub>	Q10	D9	D1
P	Q35	D35	Q26	SA	SA	C	SA	SA	Q9	D0	Q0
R	TDO	TCK	SA	SA	SA	C	SA	SA	SA	TMS	TDI

(Top view)

### Pin Arrangement (HM66AQB18202) 165PIN-BGA

	1	2	3	4	5	6	7	8	9	10	11
A	CQ	V <sub>SS</sub>	SA	W	BW1	K	NC	R	SA	NC	CQ
B	NC	Q9	D9	SA	NC	K	BW0	SA	NC	NC	Q8
C	NC	NC	D10	V <sub>SS</sub>	SA	SA	SA	V <sub>SS</sub>	NC	Q7	D8
D	NC	D11	Q10	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	NC	NC	D7
E	NC	NC	Q11	V <sub>DDQ</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>DDQ</sub>	NC	D6	Q6
F	NC	Q12	D12	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	NC	NC	Q5
G	NC	D13	Q13	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	NC	NC	D5
H	DOFF	V <sub>REF</sub>	V <sub>DDQ</sub>	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	V <sub>DDQ</sub>	V <sub>REF</sub>	ZQ
J	NC	NC	D14	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	NC	Q4	D4
K	NC	NC	Q14	V <sub>DDQ</sub>	V <sub>DD</sub>	V <sub>SS</sub>	V <sub>DD</sub>	V <sub>DDQ</sub>	NC	D3	Q3
L	NC	Q15	D15	V <sub>DDQ</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>DDQ</sub>	NC	NC	Q2
M	NC	NC	D16	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	V <sub>SS</sub>	NC	Q1	D2
N	NC	D17	Q16	V <sub>SS</sub>	SA	SA	SA	V <sub>SS</sub>	NC	NC	D1
P	NC	NC	Q17	SA	SA	C	SA	SA	NC	D0	Q0
R	TDO	TCK	SA	SA	SA	C	SA	SA	SA	TMS	TDI

(Top view)

---

## HM66AQB36102/18202/9402

---

### Pin Arrangement (HM66AQB9402) 165PIN-BGA

	1	2	3	4	5	6	7	8	9	10	11
A	$\overline{\text{CQ}}$	$V_{SS}$	SA	$\overline{\text{W}}$	NC	$\overline{\text{K}}$	NC	$\overline{\text{R}}$	SA	SA	CQ
B	NC	NC	NC	SA	NC	K	$\overline{\text{BW}}$	SA	NC	NC	Q3
C	NC	NC	NC	$V_{SS}$	SA	SA	SA	$V_{SS}$	NC	NC	D3
D	NC	D4	NC	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	NC	NC	NC
E	NC	NC	Q4	$V_{DDQ}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DDQ}$	NC	D2	Q2
F	NC	NC	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	NC	NC
G	NC	D5	Q5	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	NC	NC
H	$\overline{\text{DOFF}}$	$V_{REF}$	$V_{DDQ}$	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	$V_{DDQ}$	$V_{REF}$	ZQ
J	NC	NC	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	Q1	D1
K	NC	NC	NC	$V_{DDQ}$	$V_{DD}$	$V_{SS}$	$V_{DD}$	$V_{DDQ}$	NC	NC	NC
L	NC	Q6	D6	$V_{DDQ}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{DDQ}$	NC	NC	Q0
M	NC	NC	NC	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	$V_{SS}$	NC	NC	D0
N	NC	D7	NC	$V_{SS}$	SA	SA	SA	$V_{SS}$	NC	NC	NC
P	NC	NC	Q7	SA	SA	C	SA	SA	NC	D8	Q8
R	TDO	TCK	SA	SA	SA	$\overline{\text{C}}$	SA	SA	SA	TMS	TDI

(Top view)

## Pin Descriptions

Name	I/O type	Descriptions
SA <sub>n</sub>	Input	Synchronous address inputs: These inputs are registered and must meet the setup and hold times around the rising edge of K for READ cycles and must meet the setup and hold times around the rising edge of $\bar{K}$ for WRITE cycles. Ball 2A is reserved for the next higher-order address input on future devices. All transactions operate on a burst-of-two words (one clock period of bus activity). These inputs are ignored when device is deselected.
$\bar{R}$	Input	Synchronous read: When low, this input causes the address inputs to be registered and a READ cycle to be initiated. This input must meet setup and hold times around the rising edge of K.
$\bar{W}$	Input	Synchronous write: When low, this input causes the address inputs to be registered and a WRITE cycle to be initiated. This input must meet setup and hold times around the rising edge of K.
$\bar{BW}$ $\bar{BWn}$	Input	Synchronous byte writes: When low, these inputs cause their respective byte to be registered and written during WRITE cycles. These signals must meet setup and hold times around the rising edges of K and $\bar{K}$ for each of the two rising edges comprising the WRITE cycle. See Byte Write Truth Table for signal to data relationship.
K, $\bar{K}$	Input	Input clock: This input clock pair registers address and control inputs on the rising edge of K, and registers data on the rising edge of K and the rising edge of $\bar{K}$ . $\bar{K}$ is ideally 180 degrees out of phase with K. All synchronous inputs must meet setup and hold times around the clock rising edges.
C, $\bar{C}$	Input	Output clock: This clock pair provides a user-controlled means of tuning device output data. The rising edge of C is used as the output timing reference for second output data. The rising edge of $\bar{C}$ is used as the output reference for first output data. Ideally, $\bar{C}$ is 180 degrees out of phase with C. C and $\bar{C}$ may be tied high to force the use of K and $\bar{K}$ as the output reference clocks instead of having to provide C and $\bar{C}$ clocks. If tied high, C and $\bar{C}$ must remain high and not to be toggled during device operation.
$\bar{DOFF}$	Input	DLL disable: When low, this input causes the DLL to be bypassed for stable, low-frequency operation.
ZQ	Input	Output impedance matching input: This input is used to tune the device outputs to the system data bus impedance. Q and CQ output impedance are set to $0.2 \times RQ$ , where RQ is a resistor from this ball to ground. Alternately, this ball can be connected directly to $V_{DDQ}$ , which enables the minimum impedance mode. This ball cannot be connected directly to $V_{SS}$ or left unconnected.
TMS TDI	Input	IEEE1149.1 test inputs: 1.8 V I/O levels. These balls may be left not connected if the JTAG function is not used in the circuit.
TCK	Input	IEEE1149.1 clock input: 1.8 V I/O levels. This ball must be tied to $V_{SS}$ if the JTAG function is not used in the circuit.

---

---

## HM66AQB36102/18202/9402


---

Name	I/O type	Descriptions
D0 to Dn	Input	Synchronous data inputs: Input data must meet setup and hold times around the rising edges of K and $\bar{K}$ during WRITE operations. See Pin Arrangement figures for ball site location of individual signals. The $\times 9$ device uses D0 to D8. Remaining signals are NC. The $\times 18$ device uses D0 to D17. Remaining signals are NC. The $\times 36$ device uses D0 to D35. NC signals are read in the JTAG scan chain as the logic level applied to the ball site.
CQ, $\bar{CQ}$	Output	Synchronous echo clock outputs: The edges of these outputs are tightly matched to the synchronous data outputs and can be used as a data valid indication. These signals run freely and do not stop when Q tri-states.
TDO	Output	IEEE 1149.1 test output: 1.8 V I/O level.
Q0 to Qn	Output	Synchronous data outputs: Output data is synchronized to the respective C and $\bar{C}$ , or to the respective K and $\bar{K}$ rising edges if C and $\bar{C}$ are tied high. This bus operates in response to $\bar{R}$ commands. See Pin Arrangement figures for ball site location of individual signals. The $\times 9$ device uses Q0 to Q8. Remaining signals are NC. The $\times 18$ device uses Q0 to Q17. Remaining signals are NC. The $\times 36$ device uses Q0 to Q35. NC signals are read in the JTAG scan chain as the logic level applied to the ball site.
V <sub>DD</sub>	Supply	Power supply: 1.8 V nominal. See DC Characteristics and Operating Conditions for range.
V <sub>DDQ</sub>	Supply	Power supply: Isolated output buffer supply. Nominally 1.5 V. 1.8 V is also permissible. See DC Characteristics and Operating Conditions for range.
V <sub>SS</sub>	Supply	Power supply: Ground
V <sub>REF</sub>	—	HSTL input reference voltage: Nominally V <sub>DDQ</sub> /2. Provides a reference voltage for the input buffers.
NC	—	No connect: These signals are internally connected and appear in the JTAG scan chain as the logic level applied to the ball sites. These signals may be connected to ground to improve package heat dissipation.


Note: 1. All power supply and ground balls must be connected for proper operation of the device.



Block Diagram (HM66AQB36102)

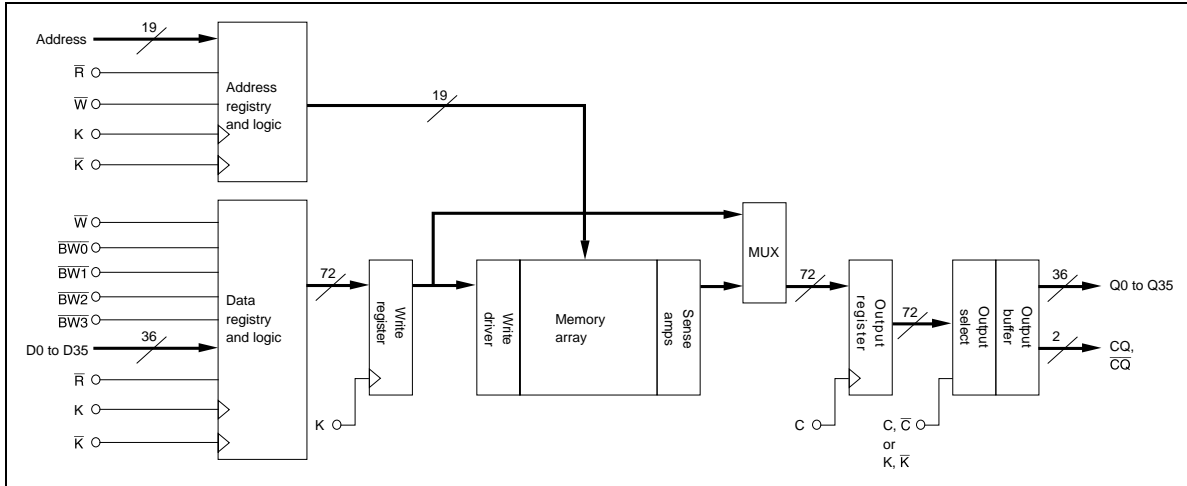


Block Diagram (HM66AQB18202)

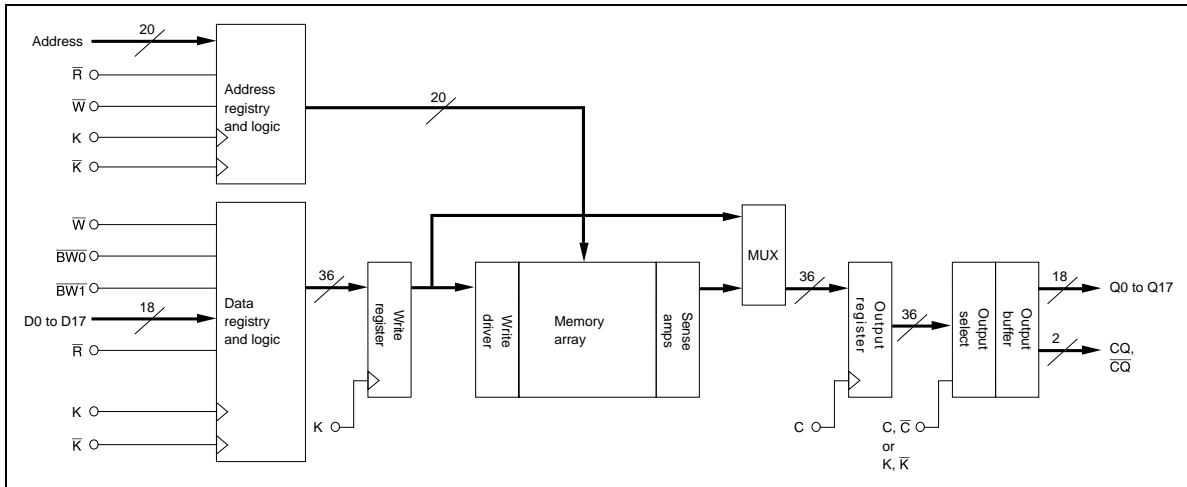

# HM66AQB36102/18202/9402

## Block Diagram (HM66AQB9402)

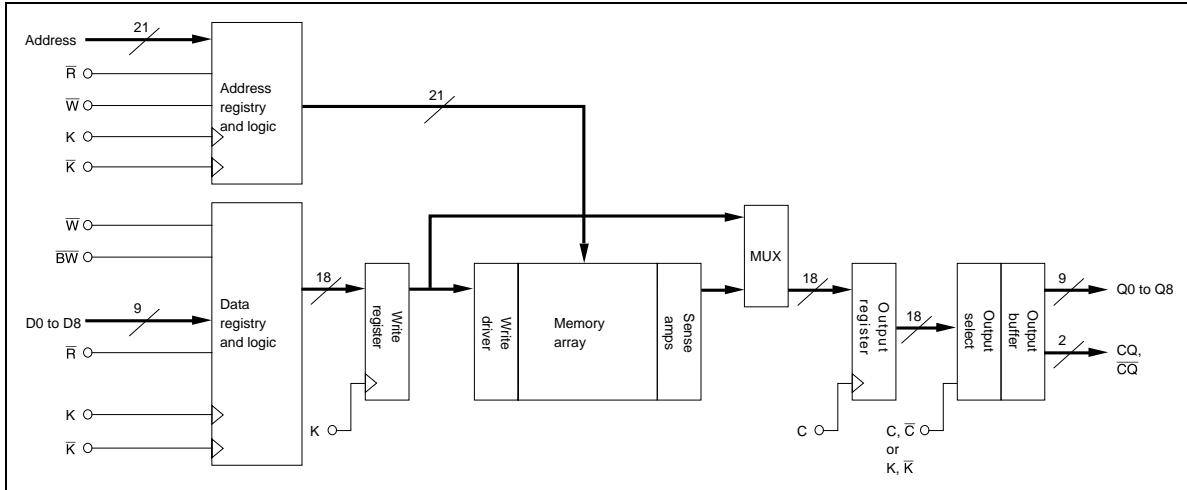

**Truth Table**

Operation	K	$\bar{R}$	$\bar{W}$	D or Q		
WRITE cycle	L→H	×	L	Data in		
Load address, input write data on consecutive K and $\bar{K}$ rising edges				Input data	$D_A(A+0)$	$D_A(A+1)$
				Input clock	$K(t)\uparrow$	$\bar{K}(t)\uparrow$
READ cycle	L→H	L	×	Data out		
Load address, output data on consecutive C and $\bar{C}$ rising edges				Output data	$Q_A(A+0)$	$Q_A(A+1)$
				Output clock	$\bar{C}(t+1)\uparrow$	$C(t+2)\uparrow$
NOP (No operation)	L→H	H	H	D = × or Q = High-Z		
STANDBY (Clock stopped)	Stopped	×	×	Previous state		

- Notes:
1. H: high level, L: low level, ×: don't care,  $\uparrow$ : rising edge.
  2. Data inputs are registered at K and  $\bar{K}$  rising edges. Data outputs are delivered at C and  $\bar{C}$  rising edges, except if C and  $\bar{C}$  are high, then data outputs are delivered at K and  $\bar{K}$  rising edges.
  3.  $\bar{R}$  and  $\bar{W}$  must meet setup/hold times around the rising edges (low to high) of K and are registered at the rising edge of K.
  4. This device contains circuitry that will ensure the outputs will be in high-Z during power-up.
  5. Refer to state diagram and timing diagrams for clarification.
  6. It is recommended that  $(K) = /(\bar{K}) = (C) = /(\bar{C})$  when clock is stopped. This is not essential, but permits most rapid restart by overcoming transmission line charging symmetrically.

---

## HM66AQB36102/18202/9402

---

### Byte Write Truth Table

(HM66AQB36102)

Operation	K	$\bar{K}$	$\overline{BW0}$	$\overline{BW1}$	$\overline{BW2}$	$\overline{BW3}$
Write D0 to D35	L→H	—	0	0	0	0
	—	L→H	0	0	0	0
Write D0 to D8	L→H	—	0	1	1	1
	—	L→H	0	1	1	1
Write D9 to D17	L→H	—	1	0	1	1
	—	L→H	1	0	1	1
Write D18 to D26	L→H	—	1	1	0	1
	—	L→H	1	1	0	1
Write D27 to D35	L→H	—	1	1	1	0
	—	L→H	1	1	1	0
Write nothing	L→H	—	1	1	1	1
	—	L→H	1	1	1	1

Notes: 1. H: high level, L: low level, →: rising edge.

2. Assumes a WRITE cycle was initiated.  $\overline{BW0}$  to  $\overline{BW3}$  can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.

(HM66AQB18202)

Operation	K	$\bar{K}$	$\overline{BW0}$	$\overline{BW1}$
Write D0 to D17	L→H	—	0	0
	—	L→H	0	0
Write D0 to D8	L→H	—	0	1
	—	L→H	0	1
Write D9 to D17	L→H	—	1	0
	—	L→H	1	0
Write nothing	L→H	—	1	1
	—	L→H	1	1

Notes: 1. H: high level, L: low level, →: rising edge.


2. Assumes a WRITE cycle was initiated.  $\overline{BW0}$  and  $\overline{BW1}$  can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.

(HM66AQB9402)

Operation	K	$\bar{K}$	$\bar{B}\bar{W}$
Write D0 to D8	L→H	—	0
	—	L→H	0
Write nothing	L→H	—	1
	—	L→H	1

Notes: 1. H: high level, L: low level, →: rising edge.  
 2. Assumes a WRITE cycle was initiated.  $\bar{B}\bar{W}$  can be altered for any portion of the BURST WRITE operation provided that the setup and hold requirements are satisfied.

**Bus Cycle State Diagram**

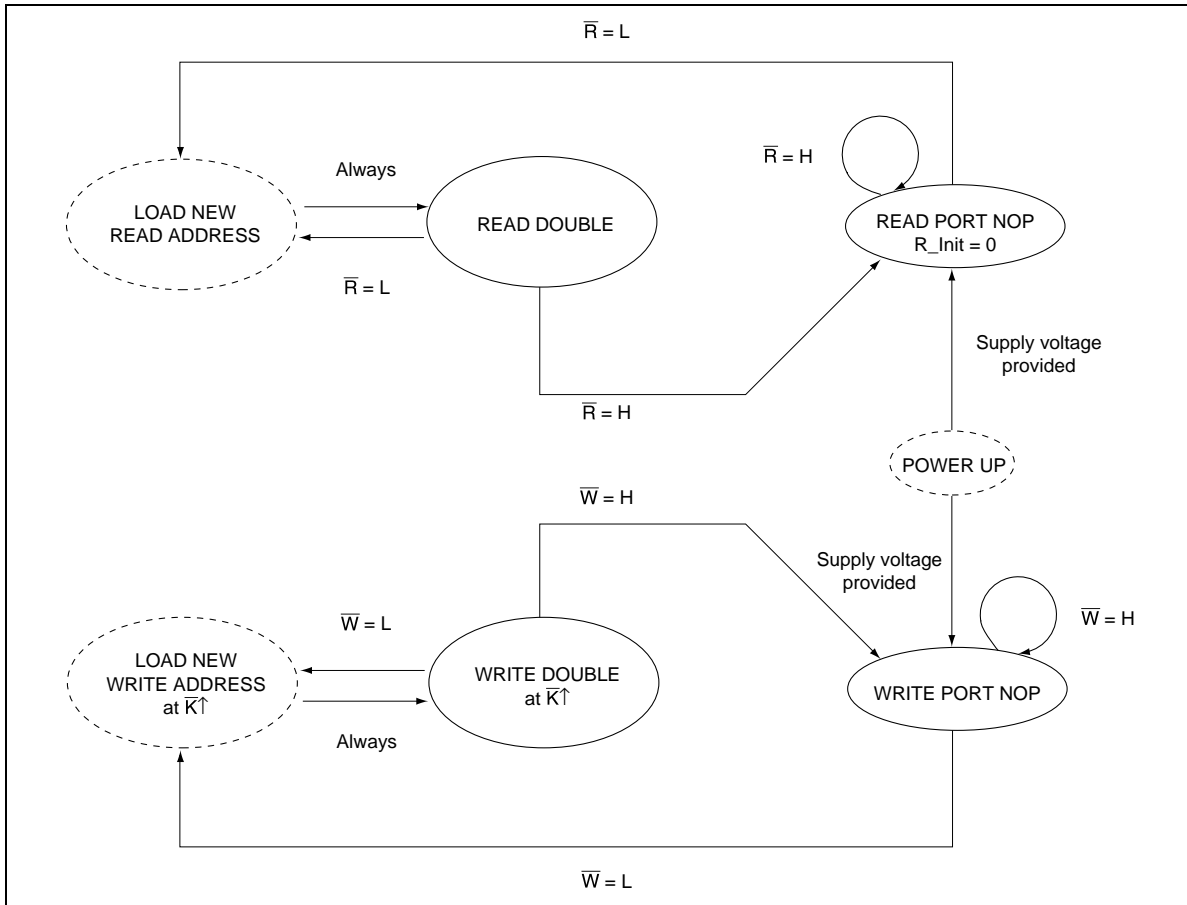

Notes: 1. The address is concatenated with one additional internal LSB to facilitate burst operation. The address order is always fixed as: xxx...xxx + 0, xxx...xxx + 1. Bus cycle is terminated at the end of this sequence (burst count = 2).  
 2. Read and write state machines can be active simultaneously.  
 3. State machine control timing sequence is controlled by K.

## HM66AQB36102/18202/9402

### Absolute Maximum Ratings

Parameter	Symbol	Rating	Unit	Notes
Input voltage on any ball	$V_{IN}$	-0.5 to $V_{DD} + 0.5$ (2.9 V max.)	V	1, 4
Input/output voltage	$V_{IO}$	-0.5 to $V_{DDQ} + 0.5$ (2.9 V max.)	V	1, 4
Core supply voltage	$V_{DD}$	-0.5 to 2.9	V	1, 4
Output supply voltage	$V_{DDQ}$	-0.5 to $V_{DD}$	V	1, 4
Junction temperature	$T_j$	+125 (max)	°C	
Storage temperature	$T_{STG}$	-55 to +125	°C	

- Notes:
- All voltage is referenced to  $V_{SS}$ .
  - Permanent device damage may occur if Absolute Maximum Ratings are exceeded. Functional operation should be restricted the Operation Conditions. Exposure to higher than recommended voltages for extended periods of time could affect device reliability.
  - These CMOS memory circuits have been designed to meet the DC and AC specifications shown in the tables after thermal equilibrium has been established.
  - The following supply voltage application sequence is recommended:  $V_{SS}$ ,  $V_{DD}$ ,  $V_{DDQ}$ ,  $V_{REF}$  then  $V_{IN}$ . Remember, according to the Absolute Maximum Ratings table,  $V_{DDQ}$  is not to exceed 2.9 V, whatever the instantaneous value of  $V_{DDQ}$ .

### Recommended DC Operating Conditions ( $T_a = 0$ to $+70^\circ\text{C}$ )

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Power supply voltage -- core	$V_{DD}$	1.7	1.8	1.9	V	
Power supply voltage -- I/O	$V_{DDQ}$	1.4	1.5	$V_{DD}$	V	
Input reference voltage -- I/O	$V_{REF}$	0.68	0.75	0.95	V	1
Input high voltage	$V_{IH(DC)}$	$V_{REF} + 0.1$	—	$V_{DDQ} + 0.3$	V	2, 3
Input low voltage	$V_{IL(DC)}$	-0.3	—	$V_{REF} - 0.1$	V	2, 3

- Notes:
- Peak to peak AC component superimposed on  $V_{REF}$  may not exceed 5% of  $V_{REF}$ .
  - $V_{REF} = 0.75$  V (typ).
  - Overshoot:  $V_{IH(AC)} \leq V_{DD} + 0.7$  V for  $t \leq t_{KHKH}/2$   
 Undershoot:  $V_{IL(AC)} \geq -0.5$  V for  $t \leq t_{KHKL}/2$   
 Power-up:  $V_{IH} \leq V_{DDQ} + 0.3$  V and  $V_{DD} \leq 1.7$  V and  $V_{DDQ} \leq 1.4$  V for  $t \leq 200$  ms  
 During normal operation,  $V_{DDQ}$  must not exceed  $V_{DD}$ .  
 Control input signals may not have pulse widths less than  $t_{KHKL}$  (min) or operate at cycle rates less than  $t_{KHKH}$  (min).

## HM66AQB36102/18202/9402

**DC Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 1.8 \text{ V} \pm 0.1 \text{ V}$ )

Parameter	Symbol	Typ	HM66AQB36102/HM66AQB18202 HM66AQB9402				Unit	Notes
			Max					
			-40	-50	-60	-75		
Operating supply current (READ / WRITE)	( $\times 9 / \times 18$ )	$I_{DD}$	TBD	600	490	415	340	mA
	( $\times 36$ )	$I_{DD}$	TBD	800	655	550	450	mA
Standby supply current (NOP)	( $\times 9 / \times 18$ )	$I_{SB1}$	TBD	200	170	150	125	mA
	( $\times 36$ )	$I_{SB1}$	TBD	210	180	160	135	mA

- Notes
1. All inputs (except ZQ,  $V_{REF}$ ) are held at either  $V_{IH}$  or  $V_{IL}$ .
  2.  $I_{OUT} = 0 \text{ mA}$ .  $V_{DD} = V_{DD} \text{ max}$ ,  $t_{KHKH} = t_{KHKH} \text{ min}$ .
  3. Typical values are measured at  $V_{DD} = 1.8 \text{ V}$ ,  $V_{DDQ} = 1.5 \text{ V}$ ,  $T_a = +25^\circ\text{C}$ , and  $t_{KHKH} = 6 \text{ ns}$ .
  4. Operating supply currents are measured at 100% bus utilization.
  5. NOP currents are valid when entering NOP after all pending READ and WRITE cycles are completed.

Parameter	Symbol	Min	Max	Unit	Test conditions	Notes
Input leakage current	$I_{LI}$	-2	2	$\mu\text{A}$		8
Output leakage current	$I_{LO}$	-2	2	$\mu\text{A}$		9
Output high voltage (Low)	$V_{OH}$	$V_{DDQ} - 0.2$	$V_{DDQ}$	V	$ I_{OH}  \leq 0.1 \text{ mA}$	3, 4
	$V_{OH}$	$V_{DDQ}/2 - 0.08$	$V_{DDQ}/2 + 0.08$	V	Notes1	3, 4
Output low voltage (Low)	$V_{OL}$	$V_{SS}$	0.2	V	$I_{OL} \leq 0.1 \text{ mA}$	3, 4
	$V_{OL}$	$V_{DDQ}/2 - 0.08$	$V_{DDQ}/2 + 0.08$	V	Notes2	3, 4
Output "High" current	$I_{OH}$	$(V_{DDQ}/2)/(RQ/5 + 10\%)$	$(V_{DDQ}/2)/(RQ/5 - 10\%)$	mA		5, 7
Output "Low" current	$I_{OL}$	$(V_{DDQ}/2)/(RQ/5 - 10\%)$	$(V_{DDQ}/2)/(RQ/5 + 10\%)$	mA		6, 7

---

## HM66AQB36102/18202/9402

---


- Notes:
1. Outputs are impedance-controlled.  $|I_{OH}| = (V_{DDQ}/2)/(RQ/5)$  for values of  $175 \Omega \leq RQ \leq 350 \Omega$ .
  2. Outputs are impedance-controlled.  $I_{OL} = (V_{DDQ}/2)/(RQ/5)$  for values of  $175 \Omega \leq RQ \leq 350 \Omega$ .
  3. AC load current is higher than the shown DC values. AC I/O curves are available upon request.
  4. HSTL outputs meet JEDEC HSTL Class I and Class II standards.
  5. Measured at  $V_{OH} = V_{DDQ}/2$
  6. Measured at  $V_{OL} = V_{DDQ}/2$
  7. Output buffer impedance can be programmed by terminating the ZQ ball to  $V_{SS}$  through a precision resistor (RQ). The value of RQ is five times the output impedance desired. The allowable range of RQ to guarantee impedance matching with a tolerance of 10% is  $250 \Omega$  typical. The total external capacitance of ZQ ball must be less than 7.5 pF.
  8.  $0 \leq V_{IN} \leq V_{DDQ}$  for all input balls (except  $V_{REF}$ , ZQ, TCK, TMS, TDI ball)
  9.  $0 \leq V_{OUT} \leq V_{DDQ}$  (except TDO ball), output disabled.
  10.  $V_{DDQ} = 1.5 V \pm 0.1 V$

### Capacitance (Ta = +25°C, f = 1.0 MHz, V<sub>DD</sub> = 1.8 V)


Parameter	Symbol	Min	Typ	Max	Unit	Test conditions
Input capacitance	C <sub>IN</sub>	—	4	5	pF	V <sub>IN</sub> = 0 V
Clock input capacitance	C <sub>CLK</sub>	—	5	6	pF	V <sub>CLK</sub> = 0 V
Input/output capacitance (D, Q)	C <sub>I/O</sub>	—	6	7	pF	V <sub>I/O</sub> = 0 V

- Notes:
1. These parameters are sampled and not 100% tested.
  2. Parameters tested with RQ = 250  $\Omega$  and V<sub>DDQ</sub> = 1.5 V.

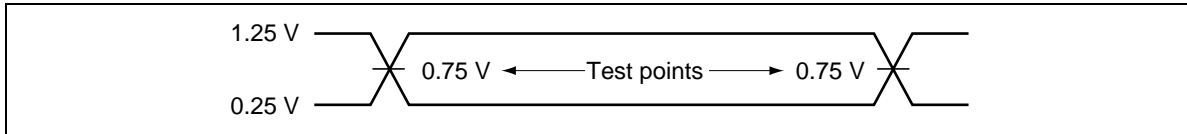


**AC Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 1.8\text{ V} \pm 0.1\text{ V}$ )**Test Conditions**Input waveform (Rise/fall time  $\leq 0.3\text{ ns}$ )

## Output waveform



## Output load condition

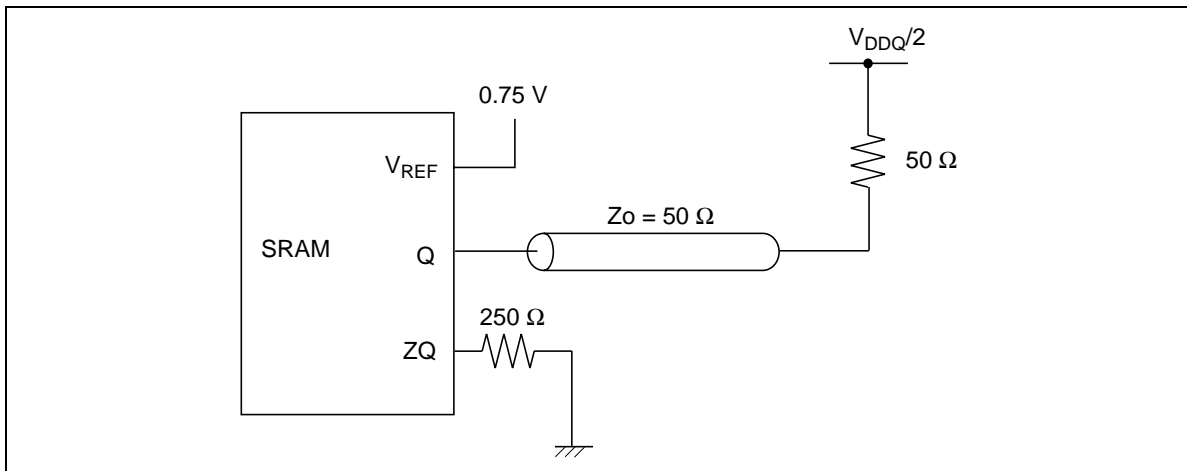

---

## HM66AQB36102/18202/9402

---

### Operating Conditions

Parameter	Symbol	Min	Typ	Max	Unit	Notes
Input high voltage	$V_{IH(AC)}$	$V_{REF} + 0.2$	—	—	V	1, 2, 3
Input low voltage	$V_{IL(AC)}$	—	—	$V_{REF} - 0.2$	V	1, 2, 3

- Notes:
- All voltages referenced to  $V_{SS}$  (GND).
  - Overshoot:  $V_{IH(AC)} \leq V_{DD} + 0.7$  V for  $t \leq t_{KHKH}/2$   
Undershoot:  $V_{IL(AC)} \geq -0.5$  V for  $t \leq t_{KHKL}/2$   
Power-up:  $V_{IH} \leq V_{DDQ} + 0.3$  V and  $V_{DD} \leq 1.7$  V and  $V_{DDQ} \leq 1.4$  V for  $t \leq 200$  ms  
During normal operation,  $V_{DDQ}$  must not exceed  $V_{DD}$ . Control input signals may not have pulse widths less than  $t_{KHKL}$  (min) or operate at cycle rates less than  $t_{KHKH}$  (min).
  - To maintain a valid level, the transitioning edge of the input must:
    - Sustain a constant slew rate from the current AC level through the target AC level,  $V_{IL(AC)}$  or  $V_{IH(AC)}$ .
    - Reach at least the target AC level.
    - After the AC target level is reached, continue to maintain at least the target DC level,  $V_{IL(DC)}$  or  $V_{IH(DC)}$ .

## HM66AQB36102/18202/9402

		HM66AQB36102/HM66AQB18202 HM66AQB9402									
		-40		-50		-60		-75			
Parameter	Symbol	Min	Max	Min	Max	Min	Max	Min	Max	Unit	Notes
Average clock cycle time (K, $\bar{K}$ , C, $\bar{C}$ )	$t_{KHKH}$	4.00	5.25	5.00	6.30	6.00	7.88	7.50	8.40	ns	
Clock phase jitter (K, $\bar{K}$ , C, $\bar{C}$ )	$t_{KC}$ var	—	0.20	—	0.20	—	0.20	—	0.20	ns	3
Clock high time (K, $\bar{K}$ , C, $\bar{C}$ )	$t_{KHKL}$	1.60	—	2.00	—	2.40	—	3.00	—	ns	
Clock low time (K, $\bar{K}$ , C, $\bar{C}$ )	$t_{KLKH}$	1.60	—	2.00	—	2.40	—	3.00	—	ns	
Clock to clock (K to $\bar{K}$ , C to $\bar{C}$ )	$t_{KH/KH}$	1.80	—	2.20	—	2.70	—	3.38	—	ns	
Clock to clock ( $\bar{K}$ to K, $\bar{C}$ to C)	$t_{/KH/KH}$	1.80	—	2.20	—	2.70	—	3.38	—	ns	
Clock to data clock (K to C, $\bar{K}$ to $\bar{C}$ )	$t_{KHCH}$	0	1.80	0	2.30	0	2.80	0	3.55	ns	
DLL lock time (K, C)	$t_{KC}$ lock	1,024	—	1,024	—	1,024	—	1,024	—	Cycle	2
K static to DLL reset	$t_{KC}$ reset	30	—	30	—	30	—	30	—	ns	
C, $\bar{C}$ high to output valid	$t_{CHQV}$	—	0.45	—	0.45	—	0.50	—	0.50	ns	
C, $\bar{C}$ high to output hold	$t_{CHQX}$	-0.45	—	-0.45	—	-0.50	—	-0.50	—	ns	
C, $\bar{C}$ high to echo clock valid	$t_{CHCQV}$	—	0.45	—	0.45	—	0.50	—	0.50	ns	
C, $\bar{C}$ high to echo clock hold	$t_{CHCQX}$	-0.45	—	-0.45	—	-0.50	—	-0.50	—	ns	
CQ, $\bar{C}\bar{Q}$ high to output valid	$t_{CQHQV}$	—	0.30	—	0.35	—	0.40	—	0.40	ns	4
CQ, $\bar{C}\bar{Q}$ high to output hold	$t_{CQHQX}$	-0.30	—	-0.35	—	-0.40	—	-0.40	—	ns	4
C high to output high-Z	$t_{CHQZ}$	—	0.45	—	0.45	—	0.50	—	0.50	ns	5
C high to output low-Z	$t_{CHQX1}$	-0.45	—	-0.45	—	-0.50	—	-0.50	—	ns	5

## HM66AQB36102/18202/9402

### HM66AQB36102/HM66AQB18202 HM66AQB9402

Parameter	Symbol	-40		-50		-60		-75		Unit	Notes
		Min	Max	Min	Max	Min	Max	Min	Max		
Address valid to K rising edge	$t_{AVKH}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1
Control inputs valid to K rising edge	$t_{IVKH}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1
Data-in valid to K, $\bar{K}$ rising edge	$t_{DVKH}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1
K rising edge to address hold	$t_{KHAX}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1
K rising edge to control inputs hold	$t_{KHIX}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1
K, $\bar{K}$ rising edge to data-in hold	$t_{KHDX}$	0.35	—	0.40	—	0.50	—	0.50	—	ns	1

- Notes:
1. This is a synchronous device. All addresses, data and control lines must meet the specified setup and hold times for all latching clock edges.
  2.  $V_{DD}$  slew rate must be less than 0.1 V DC per 50 ns for DLL lock retention. DLL lock time begins once  $V_{DD}$  and input clock are stable. It is recommended that the device is kept inactive during these cycles.
  3. Clock phase jitter is the variance from clock rising edge to the next expected clock rising edge.
  4. Echo clock is very tightly controlled to data valid / data hold. By design, there is a  $\pm 0.1$  ns variation from echo clock to data. The datasheet parameters reflect tester guardbands and test setup variations.
  5. Transitions are measured  $\pm 100$  mV from steady-state voltage.
  6. At any given voltage and temperature  $t_{CHQZ}$  is less than  $t_{CHQX1}$  and  $t_{CHQZ}$  less than  $t_{CHQV}$ .

- Remarks:
1. This parameter is sampled.
  2. Test conditions as specified with the output loading as shown in AC Test Conditions unless otherwise noted.
  3. Control input signals may not be operated with pulse widths less than  $t_{KHKL}$  (min).
  4. If C,  $\bar{C}$  are tied high, K,  $\bar{K}$  become the references for C,  $\bar{C}$  timing parameters.
  5.  $V_{DDQ}$  is +1.5 V DC.



---

## HM66AQB36102/18202/9402

---

### JTAG Specification

These products support a limited set of JTAG functions as in IEEE standard 1149.1.

### Disabling the Test Access Port

It is possible to use this device without utilizing the TAP. To disable the TAP controller without interfering with normal operation of the device, TCK must be tied to  $V_{SS}$  to preclude mid level inputs.

TDI and TMS are designed so an undriven input will produce a response identical to the application of a logic 1, and may be left unconnected. But they may also be tied to  $V_{DD}$  through a 1k resistor.

TDO should be left unconnected.

### Test Access Port (TAP) Pins

Symbol I/O	Pin assignments	Description
TCK	2R	Test clock input. All inputs are captured on the rising edge of TCK and all outputs propagate from the falling edge of TCK.
TMS	10R	Test mode select. This is the command input for the TAP controller state machine.
TDI	11R	Test data input. This is the input side of the serial registers placed between TDI and TDO. The register placed between TDI and TDO is determined by the state of the TAP controller state machine and the instruction that is currently loaded in the TAP instruction.
TDO	1R	Test data output. Output changes in response to the falling edge of TCK. This is the output side of the serial registers placed between TDI and TDO.

Note: The device does not have TRST (TAP reset). The Test-Logic Reset state is entered while TMS is held high for five rising edges of TCK. The TAP controller state is also reset on SRAM POWER-UP.

---



---

## HM66AQB36102/18202/9402

---

### TAP DC Operating Characteristics (T<sub>a</sub> = 0 to +70°C, V<sub>DD</sub> = 1.8 V ± 0.1 V)

Parameter	Symbol	Min	Max	Unit	Conditions
Input high voltage	V <sub>IH</sub>	1.3	V <sub>DD</sub> + 0.3	V	
Input low voltage	V <sub>IL</sub>	-0.3	+0.5	V	
Input leakage current	I <sub>LI</sub>	-5.0	+5.0	μA	0 V ≤ V <sub>IN</sub> ≤ V <sub>DD</sub>
Output leakage current	I <sub>LO</sub>	-5.0	+5.0	μA	0 V ≤ V <sub>IN</sub> ≤ V <sub>DD</sub> , output disabled
Output low voltage	V <sub>OL1</sub>	—	0.2	V	I <sub>OLC</sub> = 100 μA
	V <sub>OL2</sub>	—	0.4	V	I <sub>OLT</sub> = 2 mA
Output high voltage	V <sub>OH1</sub>	1.6	—	V	I <sub>OHC</sub>   = 100 μA
	V <sub>OH2</sub>	1.4	—	V	I <sub>OHT</sub>   = 2 mA

Notes: 1. All voltages referenced to V<sub>SS</sub> (GND).

2. Power-up: V<sub>IH</sub> ≤ V<sub>DDQ</sub> + 0.3 V and V<sub>DD</sub> ≤ +1.7 V and V<sub>DDQ</sub> ≤ +1.4 V for t ≤ 200 ms

3. In "EXTTEST" mode and "SAMPLE" mode, V<sub>DDQ</sub> is nominally 1.5 V.

---


## HM66AQB36102/18202/9402

---


### TAP AC Test Condition

- Temperature  $0^{\circ}\text{C} \leq T_a \leq +70^{\circ}\text{C}$
- Input timing measurement reference levels 0.9 V
- Input pulse levels 0 V to 1.8 V
- Input rise/fall time  $\leq 1.0$  ns
- Output timing measurement reference levels 0.9 V
- Test load termination supply voltage ( $V_{TT}$ ) 0.9 V
- Output load See figures


Input waveform

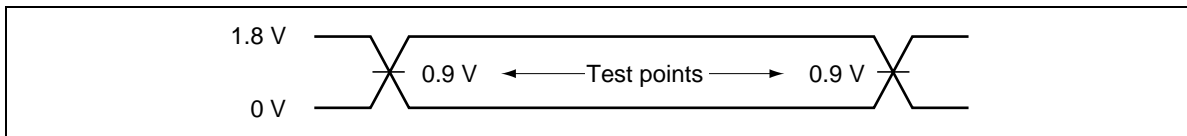

Output waveform



Output load

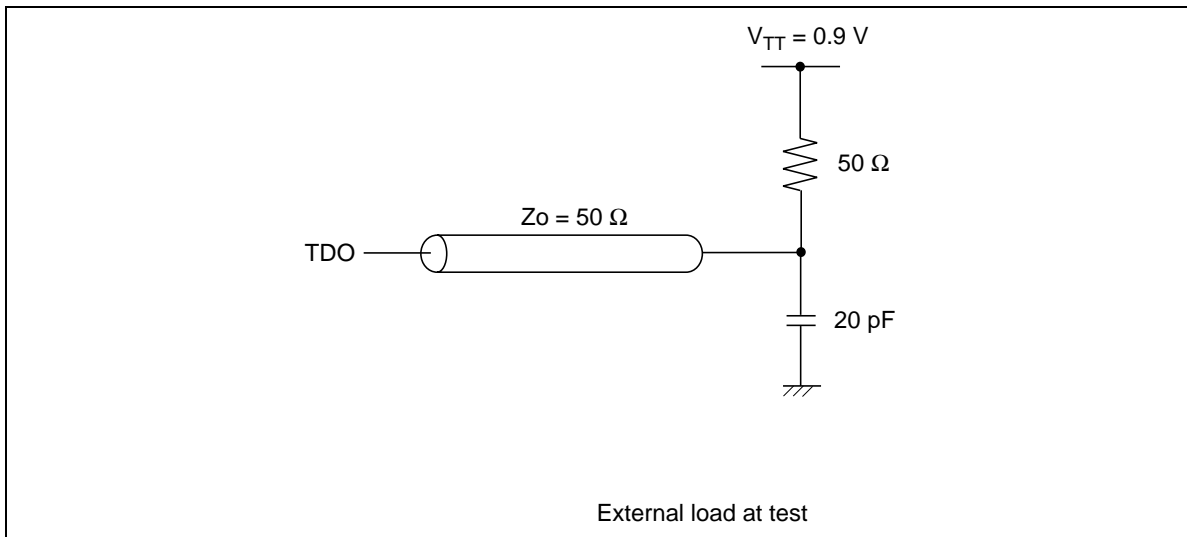




**TAP AC Operating Characteristics** ( $T_a = 0$  to  $+70^\circ\text{C}$ ,  $V_{DD} = 1.8\text{ V} \pm 0.1\text{ V}$ )

Parameter	Symbol	Min	Max	Unit	Note
Test clock cycle time	$t_{\text{THTH}}$	100	—	ns	
Test clock high pulse width	$t_{\text{THTL}}$	40	—	ns	
Test clock low pulse width	$t_{\text{TLTH}}$	40	—	ns	
Test mode select setup	$t_{\text{MVTH}}$	10	—	ns	
Test mode select hold	$t_{\text{THMX}}$	10	—	ns	
Capture setup	$t_{\text{CS}}$	10	—	ns	1
Capture hold	$t_{\text{CH}}$	10	—	ns	1
TDI valid to TCK high	$t_{\text{DVTH}}$	10	—	ns	
TCK high to TDI invalid	$t_{\text{THDX}}$	10	—	ns	
TCK low to TDO unknown	$t_{\text{TLQX}}$	0	—	ns	
TCK low to TDO valid	$t_{\text{TLQV}}$	—	20	ns	

Note: 1.  $t_{\text{CS}} + t_{\text{CH}}$  defines the minimum pause in RAM I/O pad transitions to assure pad data capture.

**TAP Controller Timing Diagram**

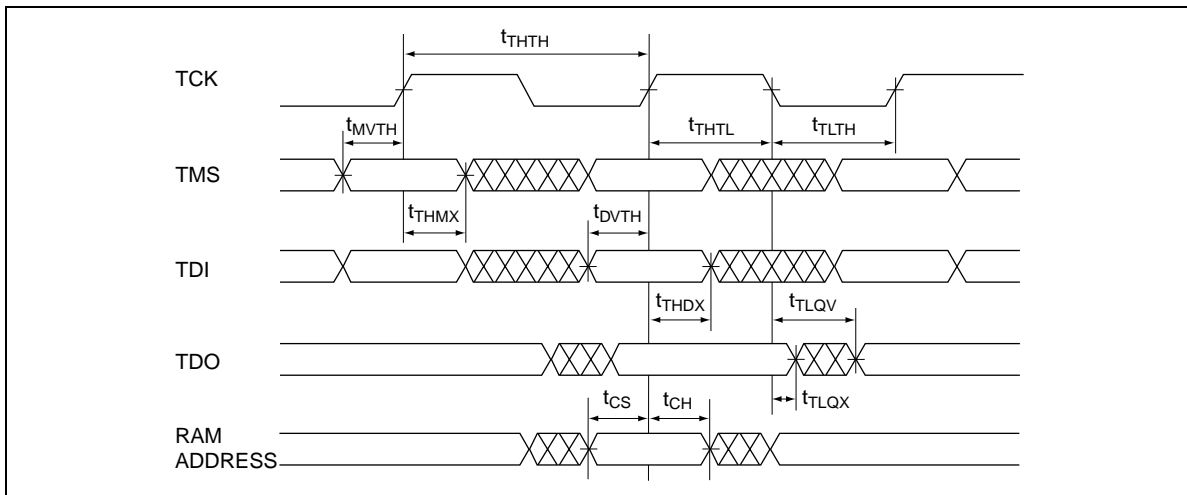

**Test Access Port Registers**

Register name	Length	Symbol
Instruction register	3 bits	IR [2:0]
Bypass register	1 bit	BP
ID register	32 bits	ID [31:0]
Boundary scan register	109 bits	BS [109:1]

---

## HM66AQB36102/18202/9402

---

### TAP Controller Instruction Set

IR2	IR1	IR0	Instruction	Description	Notes
0	0	0	EXTEST	The EXTEST instruction allows circuitry external to the component package to be tested. Boundary scan register cells at output balls are used to apply test vectors, while those at input balls capture test results. Typically, the first test vector to be applied using the EXTEST instruction will be shifted into the boundary scan register using the PRELOAD instruction. Thus, during the Update-IR state of EXTEST, the output drive is turned on and the PRELOAD data is driven onto the output balls.	1, 2
0	0	1	IDCODE	The IDCODE instruction causes the ID ROM to be loaded into the ID register when the controller is in capture-DR mode and places the ID register between the TDI and TDO balls in shift-DR mode. The IDCODE instruction is the default instruction loaded in at power up and any time the controller is placed in the Test-Logic-Reset state.	
0	1	0	SAMPLE-Z	If the SAMPLE-Z instruction is loaded in the instruction register, all RAM outputs are forced to an inactive drive state (high-Z, except CQ, CQ ball) and the boundary register is connected between TDI and TDO when the TAP controller is moved to the shift-DR state.	
0	1	1	RESERVED	These instructions are not implemented but are reserved for future use. Do not use these instructions.	
1	0	0	SAMPLE (-PRELOAD)	When the SAMPLE instruction is loaded in the instruction register, moving the TAP controller into the capture-DR state loads the data in the RAMs input and I/O buffers into the boundary scan register. Because the RAM clock(s) are independent from the TAP clock (TCK) it is possible for the TAP to attempt to capture the I/O ring contents while the input buffers are in transition (i.e., in a metastable state). Although allowing the TAP to SAMPLE metastable input will not harm the device, repeatable results cannot be expected. RAM input signals must be stabilized for long enough to meet the TAPs input data capture setup plus hold time ( $t_{cs}$ plus $t_{ch}$ ). The RAMs clock inputs need not be paused for any other TAP operation except capturing the I/O ring contents into the boundary scan register. Moving the controller to shift-DR state then places the boundary scan register between the TDI and TDO balls.	
1	0	1	RESERVED		
1	1	0	RESERVED		
1	1	1	BYPASS	The BYPASS instruction is loaded in the instruction register when the bypass register is placed between TDI and TDO. This occurs when the TAP controller is moved to the shift-DR state. This allows the board level scan path to be shortened to facilitate testing of other devices in the scan path.	

- Notes:
1. Data in output register is not guaranteed if EXTEST instruction is loaded.
  2. After performing EXTEST, power-up conditions are required in order to return part to normal operation.

---

## HM66AQB36102/18202/9402

---

### ID Register

<b>Part</b>	<b>Revision number (31:29)</b>	<b>Type number (28:12)</b>	<b>Vendor JEDEC code (11:1)</b>	<b>Start bit (0)</b>
HM66AQB36102	000	00010011010100010	00000000111	1
HM66AQB18202	000	00010010010100010	00000000111	1
HM66AQB9402	000	00010000010100010	00000000111	1

## HM66AQB36102/18202/9402

### Boundary Scan Order

Bit #	Ball ID	Signal names		
		×9	×18	×36
1	6R	$\overline{C}$	$\overline{C}$	$\overline{C}$
2	6P	C	C	C
3	6N	SA	SA	SA
4	7P	SA	SA	SA
5	7N	SA	SA	SA
6	7R	SA	SA	SA
7	8R	SA	SA	SA
8	8P	SA	SA	SA
9	9R	SA	SA	SA
10	11P	Q8	Q0	Q0
11	10P	D8	D0	D0
12	10N	NC	NC	D9
13	9P	NC	NC	Q9
14	10M	NC	Q1	Q1
15	11N	NC	D1	D1
16	9M	NC	NC	D10
17	9N	NC	NC	Q10
18	11L	Q0	Q2	Q2
19	11M	D0	D2	D2
20	9L	NC	NC	D11
21	10L	NC	NC	Q11
22	11K	NC	Q3	Q3
23	10K	NC	D3	D3
24	9J	NC	NC	D12
25	9K	NC	NC	Q12
26	10J	Q1	Q4	Q4
27	11J	D1	D4	D4
28	11H	ZQ	ZQ	ZQ
29	10G	NC	NC	D13
30	9G	NC	NC	Q13
31	11F	NC	Q5	Q5
32	11G	NC	D5	D5
33	9F	NC	NC	D14
34	10F	NC	NC	Q14
35	11E	Q2	Q6	Q6

Bit #	Ball ID	Signal names		
		×9	×18	×36
36	10E	D2	D6	D6
37	10D	NC	NC	D15
38	9E	NC	NC	Q15
39	10C	NC	Q7	Q7
40	11D	NC	D7	D7
41	9C	NC	NC	D16
42	9D	NC	NC	Q16
43	11B	Q3	Q8	Q8
44	11C	D3	D8	D8
45	9B	NC	NC	D17
46	10B	NC	NC	Q17
47	11A	CQ	CQ	CQ
48	10A	SA	NC	NC
49	9A	SA	SA	SA
50	8B	SA	SA	SA
51	7C	SA	SA	SA
52	6C	SA	SA	SA
53	8A	$\overline{R}$	$\overline{R}$	$\overline{R}$
54	7A	NC	NC	$\overline{BW1}$
55	7B	$\overline{BW}$	$\overline{BW0}$	$\overline{BW0}$
56	6B	K	K	K
57	6A	$\overline{K}$	$\overline{K}$	$\overline{K}$
58	5B	NC	NC	$\overline{BW3}$
59	5A	NC	$\overline{BW1}$	$\overline{BW2}$
60	4A	$\overline{W}$	$\overline{W}$	$\overline{W}$
61	5C	SA	SA	SA
62	4B	SA	SA	SA
63	3A	SA	SA	NC
64	2A	$V_{SS}$	$V_{SS}$	$V_{SS}$
65	1A	$\overline{CQ}$	$\overline{CQ}$	$\overline{CQ}$
66	2B	NC	Q9	Q18
67	3B	NC	D9	D18
68	1C	NC	NC	D27
69	1B	NC	NC	Q27
70	3D	NC	Q10	Q19

---



---

## HM66AQB36102/18202/9402

---


Bit #	Ball ID	Signal names		
		x9	x18	x36
71	3C	NC	D10	D19
72	1D	NC	NC	D28
73	2C	NC	NC	Q28
74	3E	Q4	Q11	Q20
75	2D	D4	D11	D20
76	2E	NC	NC	D29
77	1E	NC	NC	Q29
78	2F	NC	Q12	Q21
79	3F	NC	D12	D21
80	1G	NC	NC	D30
81	1F	NC	NC	Q30
82	3G	Q5	Q13	Q22
83	2G	D5	D13	D22
84	1H	DOFF	DOFF	DOFF
85	1J	NC	NC	D31
86	2J	NC	NC	Q31
87	3K	NC	Q14	Q23
88	3J	NC	D14	D23
89	2K	NC	NC	D32
90	1K	NC	NC	Q32

Bit #	Ball ID	Signal names		
		x9	x18	x36
91	2L	Q6	Q15	Q24
92	3L	D6	D15	D24
93	1M	NC	NC	D33
94	1L	NC	NC	Q33
95	3N	NC	Q16	Q25
96	3M	NC	D16	D25
97	1N	NC	NC	D34
98	2M	NC	NC	Q34
99	3P	Q7	Q17	Q26
100	2N	D7	D17	D26
101	2P	NC	NC	D35
102	1P	NC	NC	Q35
103	3R	SA	SA	SA
104	4R	SA	SA	SA
105	4P	SA	SA	SA
106	5P	SA	SA	SA
107	5N	SA	SA	SA
108	5R	SA	SA	SA
109	—	INTER- NAL	INTER- NAL	INTER- NAL

Note: In boundary scan mode,

1. Clock balls ( $K / \bar{K}$ ,  $C / \bar{C}$ ) are referenced to each other and must be at opposite logic levels for reliable operation.
2.  $CQ$  and  $\bar{CQ}$  data are synchronized to the respective  $C$  and  $\bar{C}$ .
3. If  $C$  and  $\bar{C}$  tied high,  $CQ$  is generated with respect to  $K$  and  $\bar{CQ}$  is generated with respect to  $\bar{K}$ .


TAP Controller State Diagram

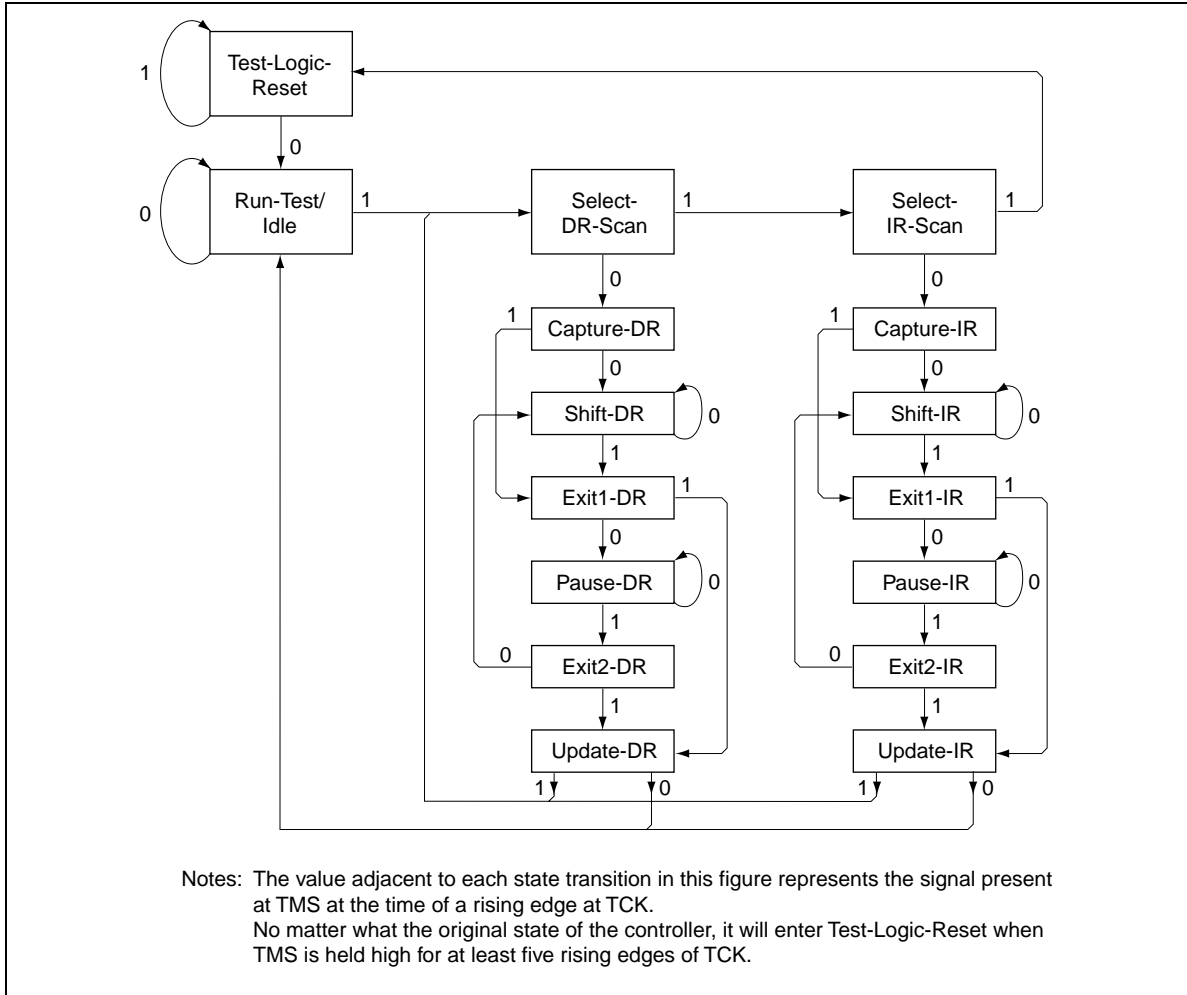

# HM66AQB36102/18202/9402

## Package Dimensions

HM66AQB36102/18202/9402BP (BP-165A)

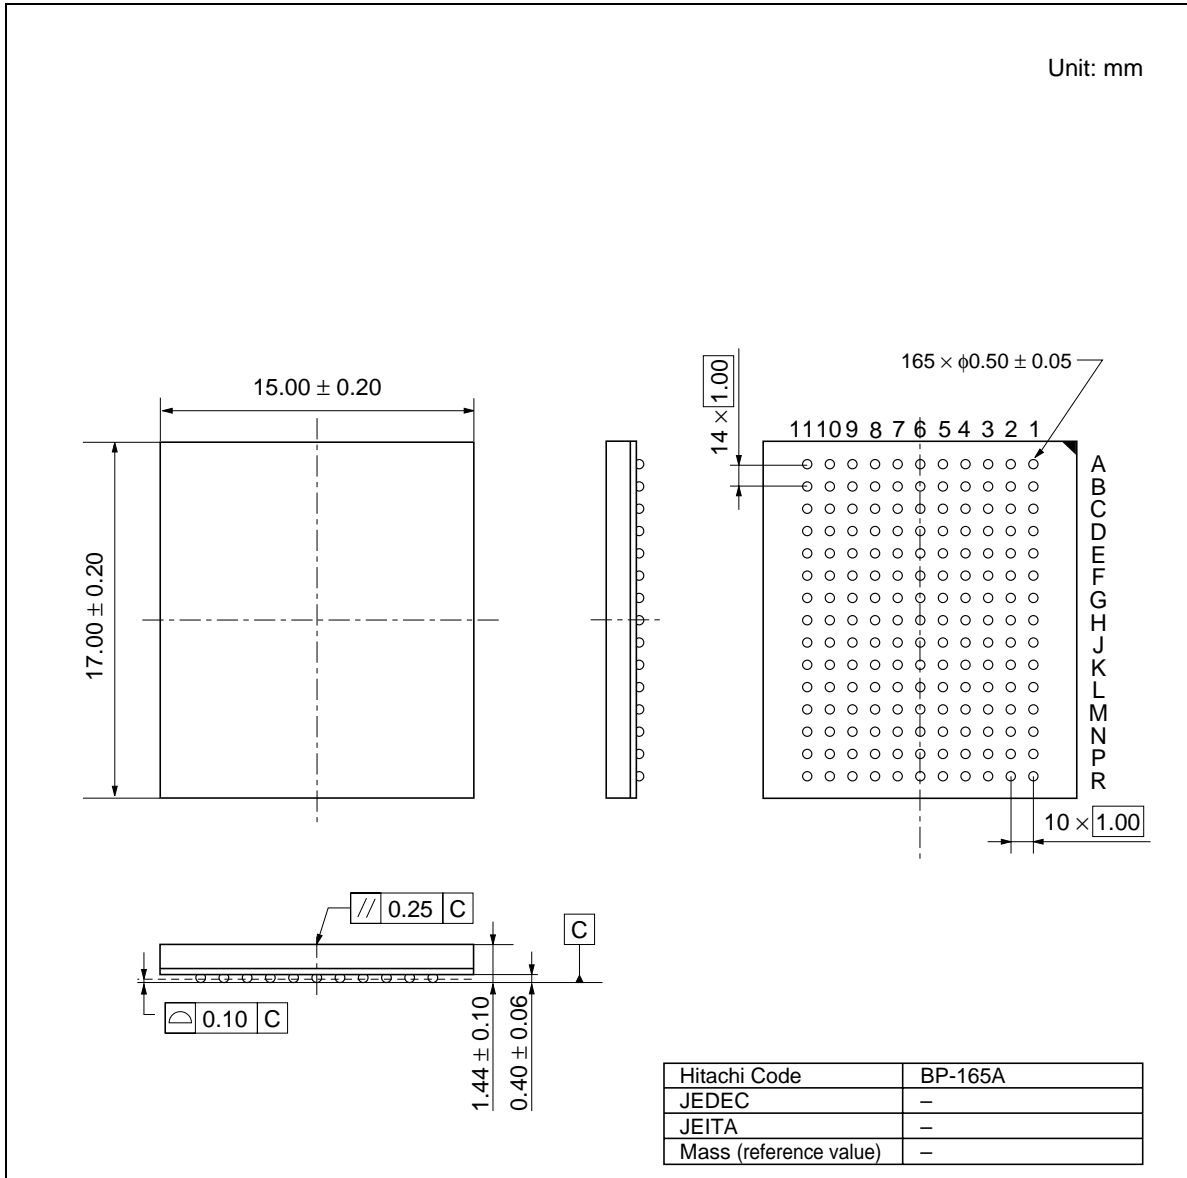

**Disclaimer**

1. Hitachi neither warrants nor grants licenses of any rights of Hitachi's or any third party's patent, copyright, trademark, or other intellectual property rights for information contained in this document. Hitachi bears no responsibility for problems that may arise with third party's rights, including intellectual property rights, in connection with use of the information contained in this document.
2. Products and product specifications may be subject to change without notice. Confirm that you have received the latest product standards or specifications before final design, purchase or use.
3. Hitachi makes every attempt to ensure that its products are of high quality and reliability. However, contact Hitachi's sales office before using the product in an application that demands especially high quality and reliability or where its failure or malfunction may directly threaten human life or cause risk of bodily injury, such as aerospace, aeronautics, nuclear power, combustion control, transportation, traffic, safety equipment or medical equipment for life support.
4. Design your application so that the product is used within the ranges guaranteed by Hitachi particularly for maximum rating, operating supply voltage range, heat radiation characteristics, installation conditions and other characteristics. Hitachi bears no responsibility for failure or damage when used beyond the guaranteed ranges. Even within the guaranteed ranges, consider normally foreseeable failure rates or failure modes in semiconductor devices and employ systemic measures such as fail-safes, so that the equipment incorporating Hitachi product does not cause bodily injury, fire or other consequential damage due to operation of the Hitachi product.
5. This product is not designed to be radiation resistant.
6. No one is permitted to reproduce or duplicate, in any form, the whole or part of this document without written approval from Hitachi.
7. Contact Hitachi's sales office for any questions regarding this document or Hitachi semiconductor products.

**Sales Offices**

---

---

# HITACHI

**Hitachi, Ltd.**

Semiconductor & Integrated Circuits  
Nippon Bldg., 2-6-2, Ohte-machi, Chiyoda-ku, Tokyo 100-0004, Japan  
Tel: (03) 3270-2111 Fax: (03) 3270-5109

URL <http://www.hitachisemiconductor.com/>

**For further information write to:**

Hitachi Semiconductor  
(America) Inc.  
179 East Tasman Drive  
San Jose, CA 95134  
Tel: <1> (408) 433-1990  
Fax: <1>(408) 433-0223

Hitachi Europe Ltd.  
Electronic Components Group  
Whitebrook Park  
Lower Cookham Road  
Maidenhead  
Berkshire SL6 8YA, United Kingdom  
Tel: <44> (1628) 585000  
Fax: <44> (1628) 778322

Hitachi Europe GmbH  
Electronic Components Group  
Dornacher Str 3  
D-85622 Feldkirchen  
Postfach 201, D-85619 Feldkirchen  
Germany  
Tel: <49> (89) 9 9180-0  
Fax: <49> (89) 9 29 30 00

Hitachi Asia Ltd.  
Hitachi Tower  
16 Collyer Quay #20-00  
Singapore 049318  
Tel : <65>-6538-6533/6538-8577  
Fax : <65>-6538-6933/6538-3877  
URL : <http://semiconductor.hitachi.com.sg>

Hitachi Asia Ltd.  
(Taipei Branch Office)  
4/F, No. 167, Tun Hwa North Road  
Hung-Kuo Building  
Taipei (105), Taiwan  
Tel : <886>-(2)-2718-3666  
Fax : <886>-(2)-2718-8180  
Telex : 23222 HAS-TP  
URL : <http://semiconductor.hitachi.com.tw>

Hitachi Asia (Hong Kong) Ltd.  
Group III (Electronic Components)  
7/F., North Tower  
World Finance Centre,  
Harbour City, Canton Road  
Tsim Sha Tsui, Kowloon Hong Kong  
Tel : <852>-2735-9218  
Fax : <852>-2730-0281  
URL : <http://semiconductor.hitachi.com.hk>

Copyright © Hitachi, Ltd., 2002. All rights reserved. Printed in Japan.  
Colophon 7.0