

SECTION 18

PACKING AND PACKING QUANTITIES

contents	page
SCOPE	18 - 2
SURFACE-MOUNT DEVICES	18 - 2
Tape specification	18 - 2
Reel specification	18 - 7
Packing quantities	18 - 8
LEADED DEVICES	18 - 9
Axial diodes	18 - 9
Tape specification	18 - 9
Reel specification	18 - 10
Ammopack specification	18 - 11
SOD64 with preformed leads	18 - 12
Radial diodes	18 - 13
Tape specification	18 - 13
Reel specification	18 - 15
Packing quantities	18 - 16

Small-signal and Medium-power Diodes

Packing and packing quantities

SCOPE

This chapter covers packing and packing quantity details for surface-mount and leaded diodes in the following packages:

Table 1 Survey of packages

PACKAGE	
SURFACE-MOUNT	THROUGH-HOLE
SC59 (SOT346)	SOD27 (DO-35)
SC70-3 (SOT323)	SOD57
SOD80(C)	SOD61
SOD87	SOD64
SOD106 (DO-214AC)	SOD66 (DO-41)
SOD106A	SOD68 (DO-34)
SOD110	SOD81
SOD323	SOD83A
SOT23	SOD88A
SOT89	SOD91
SOT143	SOT18/15 (TO-18)
SOT223	
SO20 (SOT163-1)	

SURFACE-MOUNT DEVICES

Tape and reel packing for surface-mount devices meets the feed requirements for automatic pick and place equipment (packing conforms to IEC publication 286-3). Tape is an ideal shipping container making handling easy and providing secure blister cavities in which the devices are sealed with peel-off cover tape.

Tape specification

Tape dimensions are specified in Tables 3 and 4 and in Figs.1 through 7 for 8, 12 and 24 mm tape respectively. For diodes with only two terminations, the cathode side of the device is adjacent to the sprocket holes in the tape.

Table 2 Carrier tape widths

8 mm	12 mm	24 mm
SC59 (SOT346)	SOD106(A)	SO20
SC70 (SOT323)	SOT89	
SOD80(C)	SOT223	
SOD87		
SOD110		
SOD323		
SOT23		
SOT143		

Table 3 Variable tape dimensions


PACKAGE	SYMBOL					
	W (mm)	F (mm)	P (mm)	K (mm)	B ₁ (mm)	D ₁ (mm)
SO20	24.0	11.5	12.0	3.6	14.1	1.5
Tolerance	±0.3	±0.1	±0.1	max.	max.	min.
SC59 (SOT346)	8.0	3.5	4.0	1.5	4.2	1.0
SC70 (SOT323)	8.0	3.5	4.0	1.5	4.2	1.0
SOD80(C)	8.0	3.5	4.0	2.0	4.2	1.0
SOD87	8.0	3.5	4.0	2.5	4.2	1.0
SOD106(A)	12.0	5.5	4.0	3.0	6.0	1.5
SOD110	8.0	3.5	4.0	2.5	4.2	1.0
SOD323	8.0	3.5	4.0	1.5	4.2	1.0
SOT23	8.0	3.5	4.0	1.5	4.2	1.0
SOT89	12.0	5.5	8.0	2.3	8.2	1.5
SOT143	8.0	3.5	4.0	1.5	4.2	1.0
SOT223	12.0	5.5	8.0	2.4	8.2	1.5
Tolerance	±0.2	0.05	±0.1	max.	max.	min.

Small-signal and Medium-power Diodes

Packing and packing quantities


Table 4 Fixed tape dimensions

PACKAGE	SYMBOL							
	E (mm)	D ₀ (mm)	P ₀ (mm)	P ₂ (mm)	G (mm)	T (mm)	δ (mm)	θ (deg)
SO20	1.75	1.5	4.0	2.0	3.7	0.4	0.3	10
Tolerance	±0.1	-0/+0.1	±0.1	±0.1	±0.1	max.	max.	max.
All other	1.75	1.5	4.0	2.0	0.75	0.4	0.3	15
Tolerance	±0.1	-0/+0.1	±0.1	±0.05	min.	max.	max.	max.

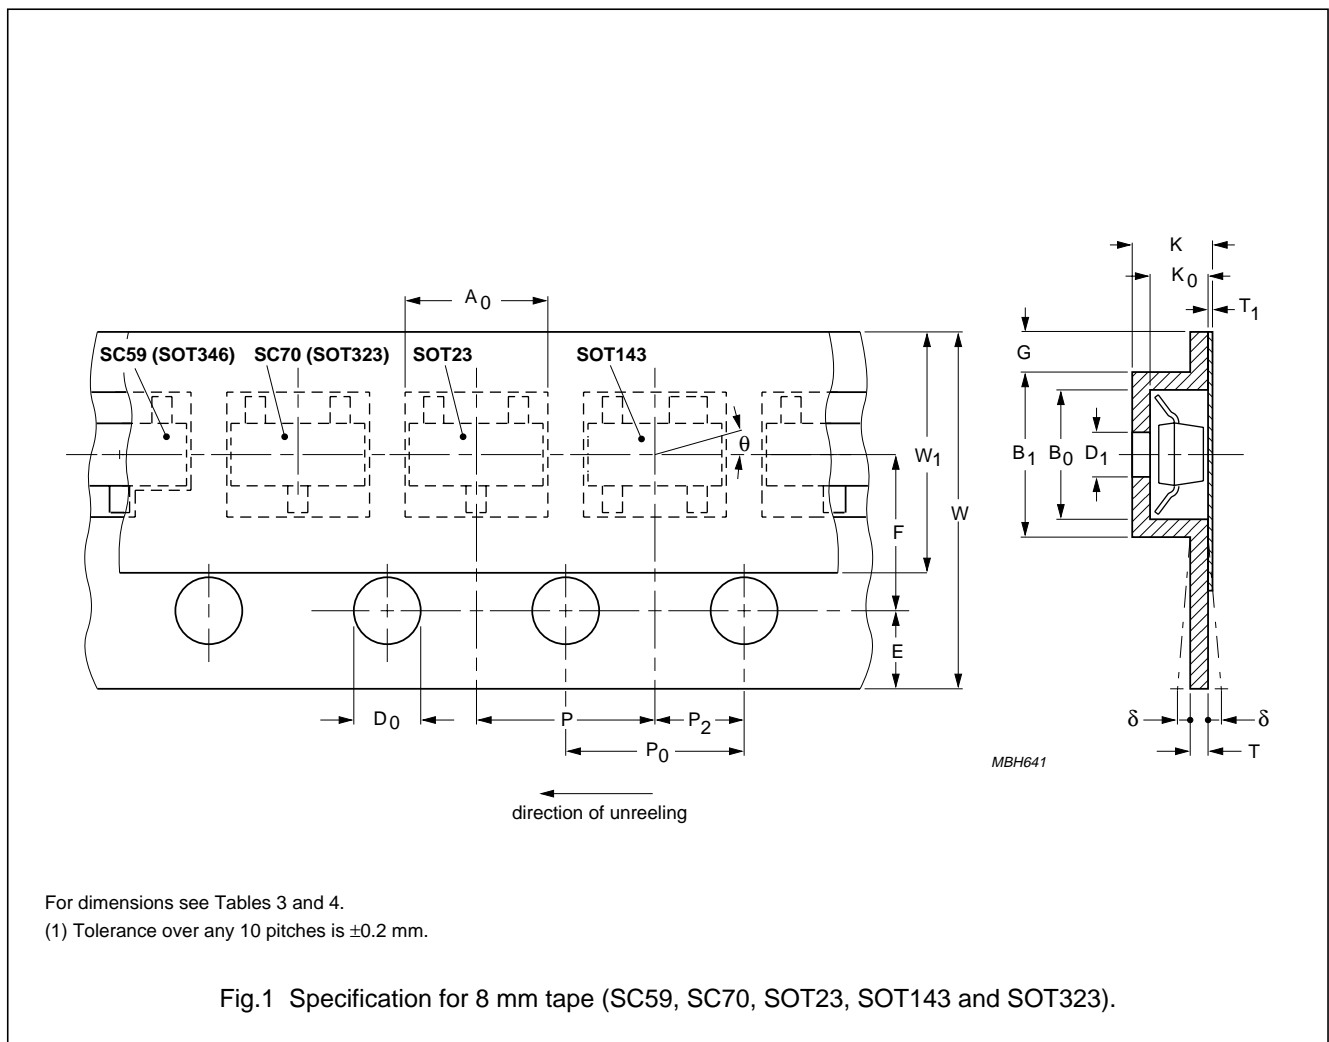


Small-signal and Medium-power Diodes

Packing and packing quantities

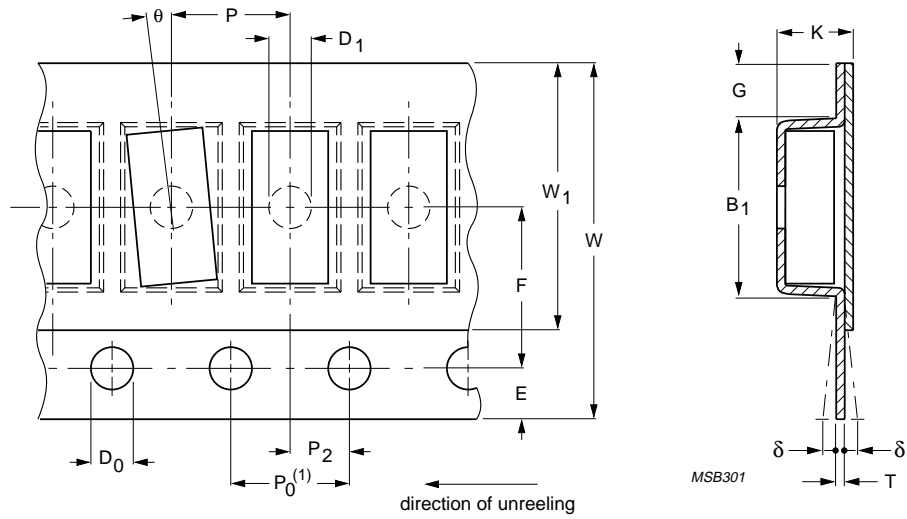

For dimensions see Tables 3 and 4.
 (1) Tolerance over any 10 pitches is 0.2 mm.

Fig.2 Specification for 8 mm tape (SOD80, SOD80C, SOD87 and SOD110).

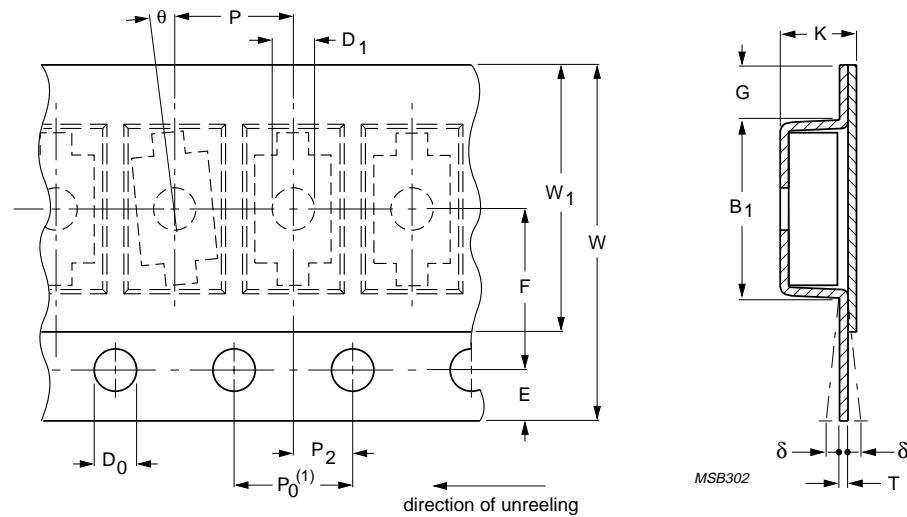


For dimensions see Tables 3 and 4.
 (1) Tolerance over any 10 pitches is 0.2 mm.

Fig.3 Specification for 8 mm tape (SOD323).


Small-signal and Medium-power Diodes

Packing and packing quantities

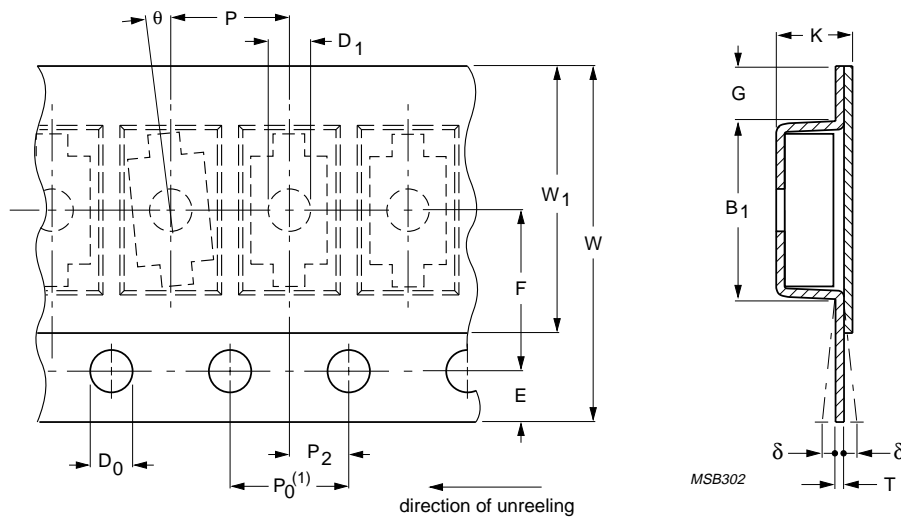

For dimensions see Tables 3 and 4.
 (1) Tolerance over any 10 pitches is 0.2 mm.

Fig.4 Specification for 12 mm tape (SOD106 and SOD106A).


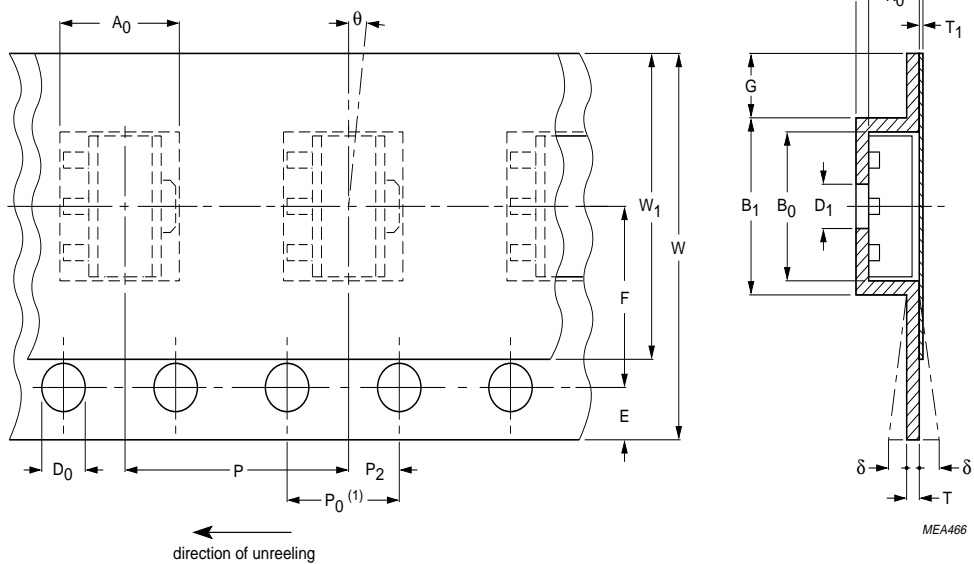


For dimensions see Tables 3 and 4.
 (1) Tolerance over any 10 pitches is 0.2 mm.

Fig.5 Specification for 12 mm tape (SOT89).

Small-signal and Medium-power Diodes

Packing and packing quantities

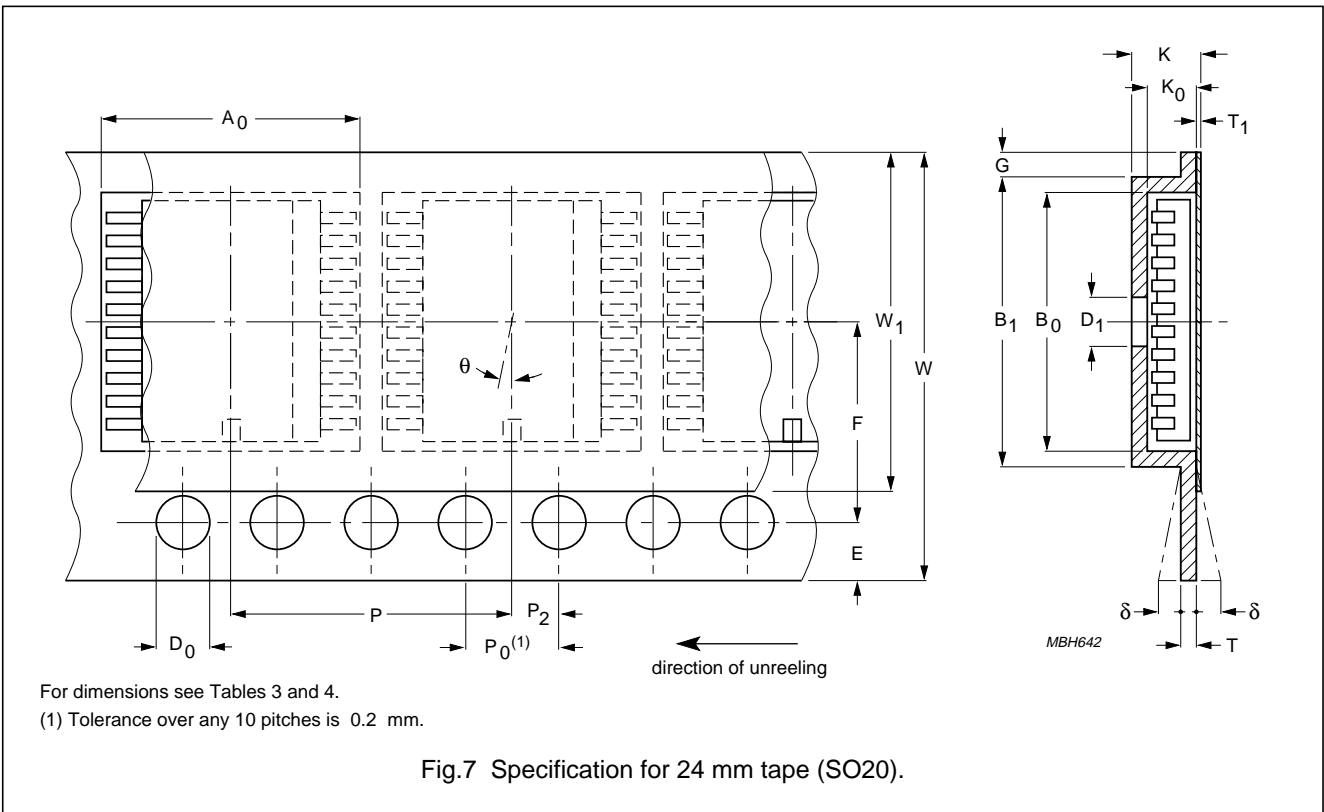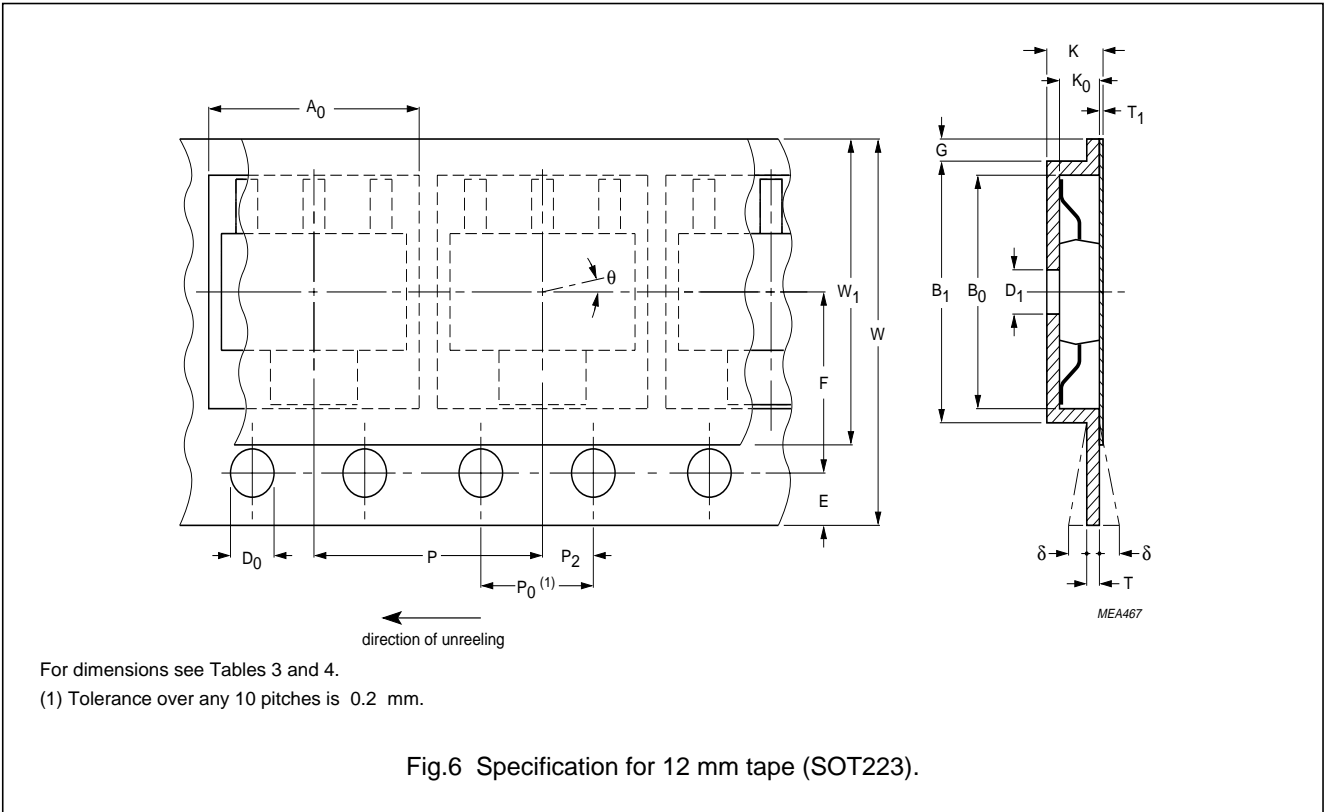

Reel specification

Reel dimensions are specified in Fig.8 and Table 5 for 8, 12 and 24 mm tape.

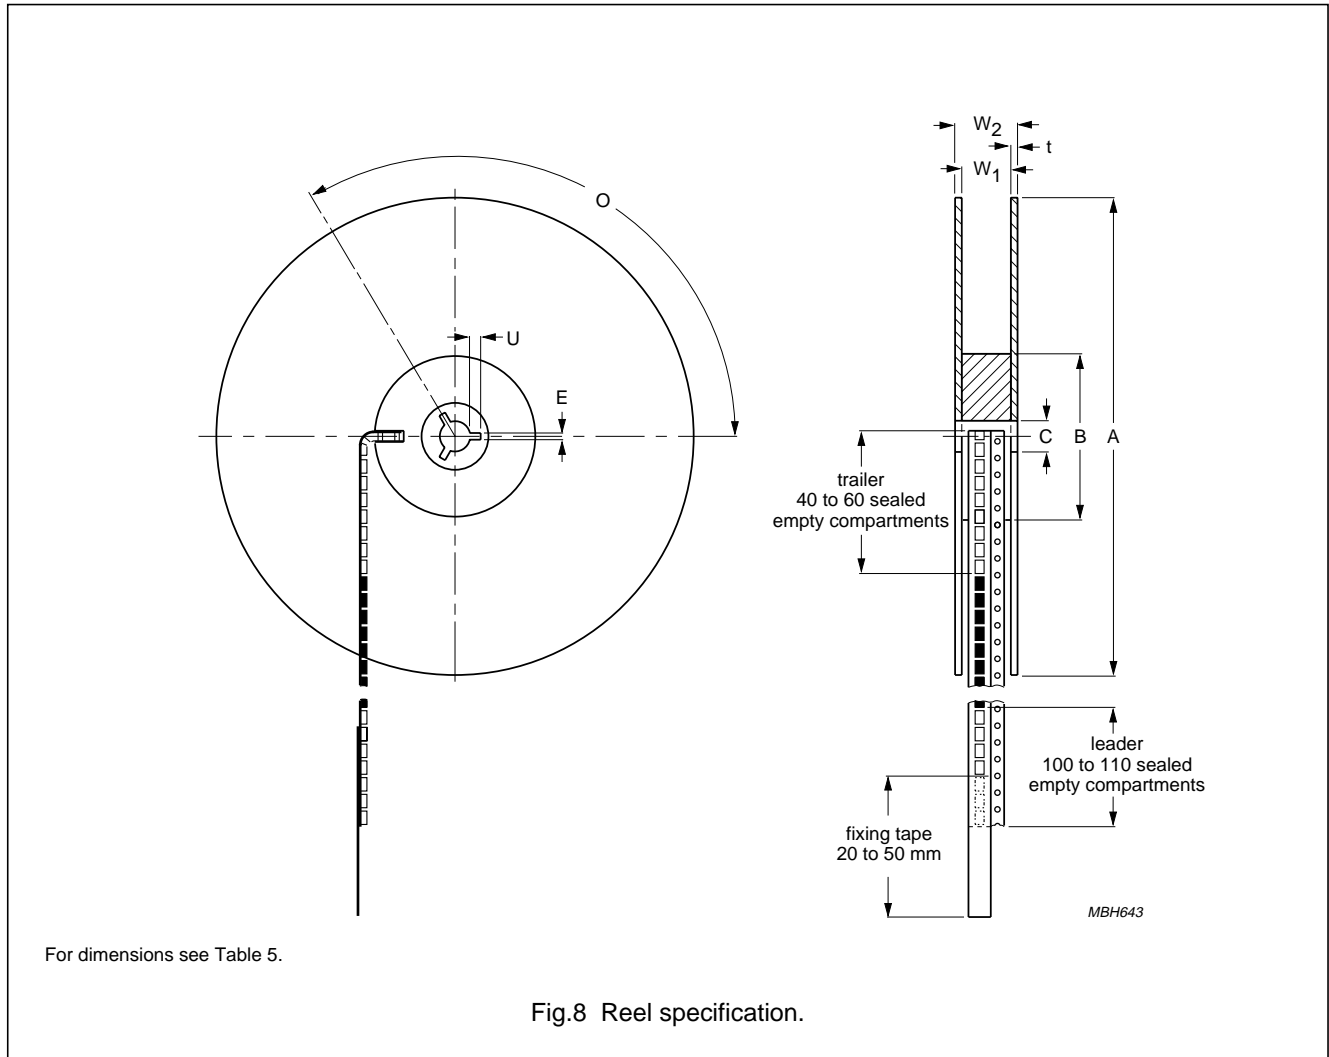


Table 5 Reel dimensions

TAPE WIDTH	SYMBOL							
	A (mm)	B (mm)	C (mm)	W ₁ (mm)	W ₂ (mm)	E (mm)	U (mm)	O (deg)
8 mm	180/286 or 180/330	62	12.75	8.4	14.4	1.5	3.6	120
12 mm	180/330	62	12.75	12.4	18.4	1.5	3.6	120
Tolerance	±0.5	±1.5	-0/+0.15	-0/+1.5	max.	min.	min.	-
24 mm	180/330	62	12.75	24.4	30.4	1.5	3.6	120
Tolerance	±0.5	±1.5	-0/+0.15	-0/+2	max.	min.	min.	-

Small-signal and Medium-power Diodes

Packing and
packing quantities**Packing quantities**

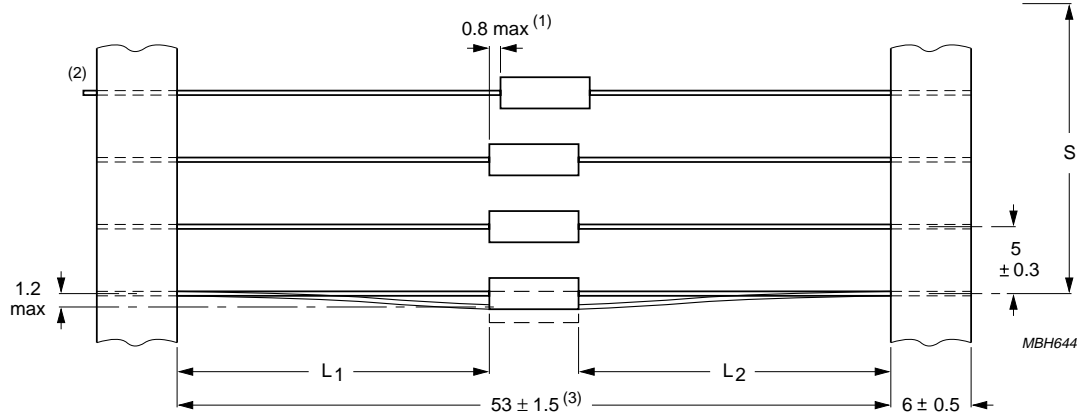
Table 6 shows the packing quantities for a single box for each package style.

Table 6 Packing quantities per package with relevant ordering code

PACKAGE	PACKING QUANTITY	ORDERING CODE ENDING	KIND OF PACKING	REEL DIAMETER (mm/inch)	REMARKS
SC59 (SOT346)	3000	115	8 mm tape and reel	180/7	
	10000	135	8 mm tape and reel	286/11 $\frac{1}{4}$	
SC70-3 (SOT323)	3000	115	8 mm tape and reel	180/7	
	10000	135	8 mm tape and reel	286/11 $\frac{1}{4}$	
SOD80(C)	1000	112	bulk	–	BB215 only
	2500	115	8 mm tape and reel	180/7	
	10000	135	8 mm tape and reel	330/13	
SOD87	2000	115	8 mm tape and reel	180/7	
	8000	135	8 mm tape and reel	330/13	
SOD106(A)	1500	115	12 mm tape and reel	180/7	
SOD110	3000	115	8 mm tape and reel	180/7	
	10000	135	8 mm tape and reel	330/13	
SOD323	3000	115	8 mm tape and reel	180/7	
	10000	135	8 mm tape and reel	286/11 $\frac{1}{4}$	
SOT23	500	212	bulk	–	
	3000	215	8 mm tape and reel	180/7	
	10000	235	8 mm tape and reel	286/11 $\frac{1}{4}$	
SOT89	250	112	bulk	–	
	1000	115	12 mm tape and reel	180/7	
	4000	135	12 mm tape and reel	330/13	
SOT143	500	212	bulk	–	
	3000	215	8 mm tape and reel	180/7	
	10000	235	8 mm tape and reel	286/11 $\frac{1}{4}$	
SOT223	1000	115	12 mm tape and reel	180/7	
	4000	135	12 mm tape and reel	330/13	
SO20	1000	118	24 mm tape and reel	330/13	BZA100 only

LEADED DEVICES**Axial diodes**

Axial diodes are available on tape according to IEC 286-1. They are most suitable for use in automatic insertion machines, cutting and forming tools, and are supplied on reels or in boxes (ammopacks).

TAPE SPECIFICATION

Dimensions in mm.

The red tape indicates the cathode terminal of the diode.

The cumulative space (S) measured over ten spacings is 50 ± 2 mm; for 26 mm tape, this is 100 ± 2 mm for 20 spaces.

The diodes are centered so that $L_1 - L_2 \leq 1.2$ mm.

A black marker is printed on the white tape of the bandolier to mark every 50 diodes.

The axial tape specification is compatible with automatic insertion equipment from Universal, U.S.M. (Dynapert) and M.E.I. (Panaset).

Notes

- (1) Displacement between any two diodes: maximum 0.4 mm for SOD68 (DO-34).
- (2) No protruding leads.
- (3) For 26 mm tape, this dimension is $26 + 1.5/-0$ mm; for SOD61, SOD83A and SOD88A packages, this dimension is 58 ± 2 mm.

Fig.9 Tape specification for axial diodes.

REEL SPECIFICATION


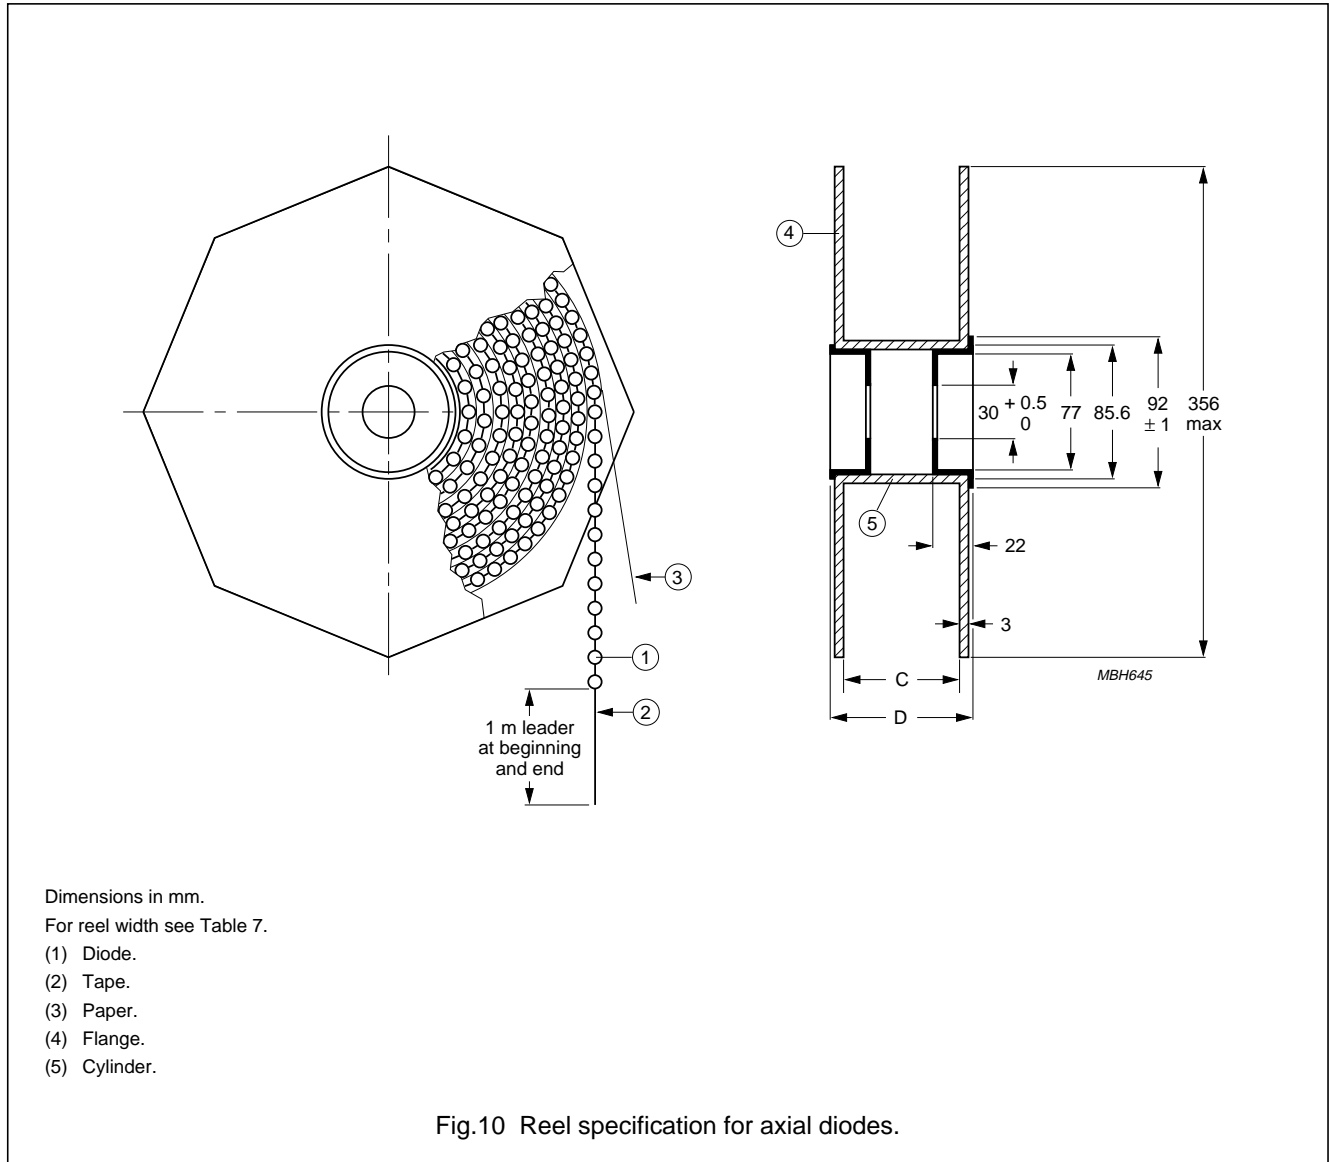


Table 7 Reel width

TAPE WIDTH (mm)	SYMBOL	
	C (mm)	D (mm)
26	40	50
53	70	80
58	75	85

AMMOPACK SPECIFICATION

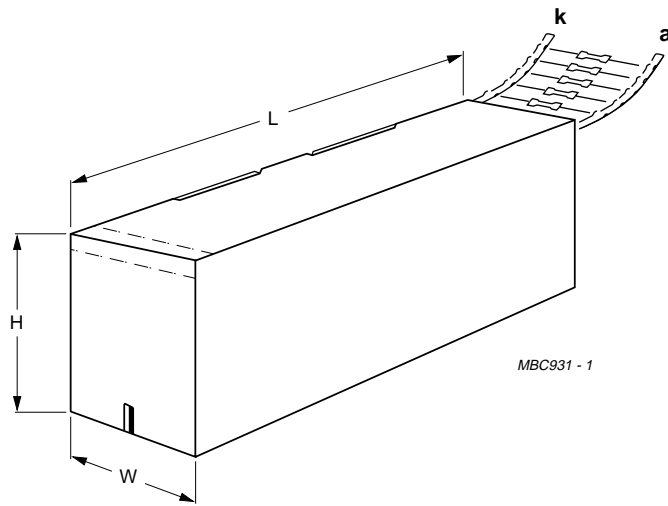

For dimensions see Table 10.

Fig.11 Ammopack specification for axial diodes.

Small-signal and Medium-power Diodes

Packing and packing quantities

SOD64 WITH PREFORMED LEADS

Some types of automatic insertion machines have problems in bending the relatively thick leads of the SOD64 package. To overcome this, diodes in SOD64 are also available with preformed leads. They can be ordered by adding a slash number to the type number, e.g.

BY228/20. Diodes with preformed leads are supplied in bulk quantities of 1500 pieces. The available preforms are depicted in Figs.12 and 13. Dimensions and ordering codes are in Table 8.

The preferred preforms are /20, /21 and /40.

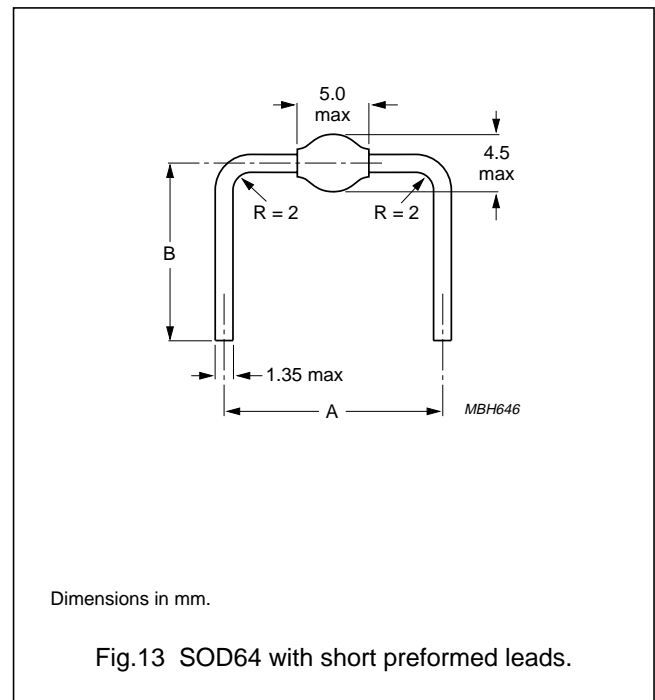
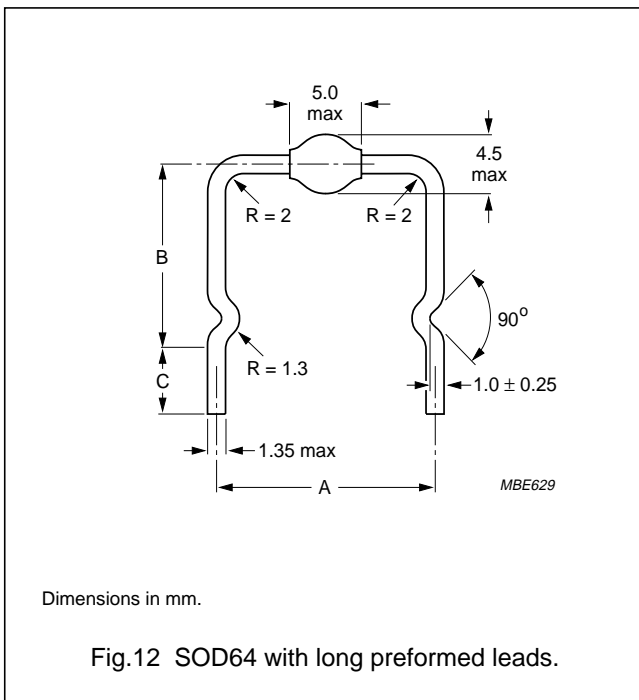



Table 8 SOD64 with preformed leads

PITCH	SYMBOL			FIGURE	ORDERING CODE SUFFIX
	A (mm)	B (mm)	C (mm)		
6e	15.24 ±1	10.0 ±1	5.0 ±1	12	/20
6e	15.24 ±1	5.5 ±0.5	–	13	/21
6e	15.24 ±1	8.0 ±1	3.0 +1/–0	12	/22
7e	17.8 ±1	10.0 ±1	5.0 ±1	12	/30
7e	17.8 ±1	10.0 ±1	3.0 +1/–0	12	/31
7e	17.5 ±0.3	7.0 ±0.5	5.0 ±0.5	12	/33
8e	20.32 ±1	10.0 ±1	5.0 ±1	12	/40
8e	20.32 ±1	15.0 ±1	–	13	/41
10e	25.4 ±1	7.0 ±1	5.0 ±1	12	/50

Radial diodes

Radial diodes (diodes with unidirectional leads) are available on tape according to IEC 286-2. They are most suitable for use on automatic insertion machines, and are supplied on reels. The specification below only applies to radial diodes in SOD27 (DO-35) and SOD68 (DO-34) packages. They are available in anode-leading ('+'-ve leading, see Fig.16) and cathode-leading ('-'-ve leading, see Fig.17) configurations.

TAPE SPECIFICATION



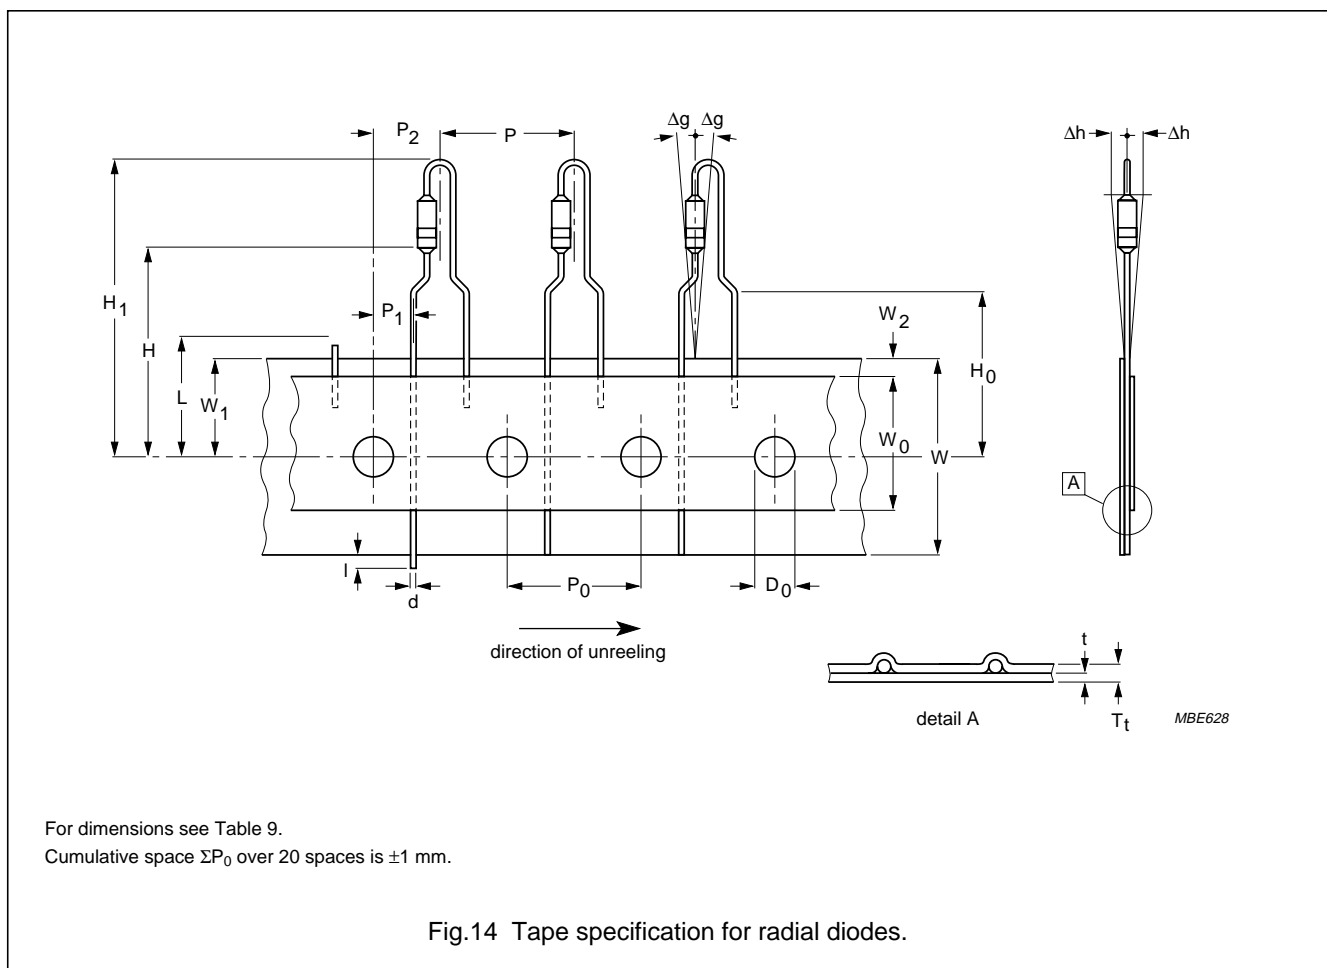


Small-signal and Medium-power Diodes

Packing and packing quantities

Table 9 Tape dimensions for radial diodes (see Figures 14 and 15)


SYMBOL	VALUE	TOLERANCE	UNIT
F	5.08	+0.6/-0.1	mm
H ₁	27.5	max.	mm
H	19	±1	mm
H ₀	16	±0.5	mm
L	11	max.	mm
I	0	max.	mm
P	12.7	±1	mm
P ₂	6.35	±1	mm
P ₁	3.81	±0.7	mm
P ₀	12.7	±0.3	mm
T _t	1.5	max.	mm
t	0.7	±0.2	mm
D ₀	4	±0.2	mm
W ₂	0	+1.5	mm
W ₀	3.5	min.	mm
W ₁	9	±0.5	mm
W	18	+1.0/-0.5	mm
Δg	0	+5	deg
Δh	0	±2	mm

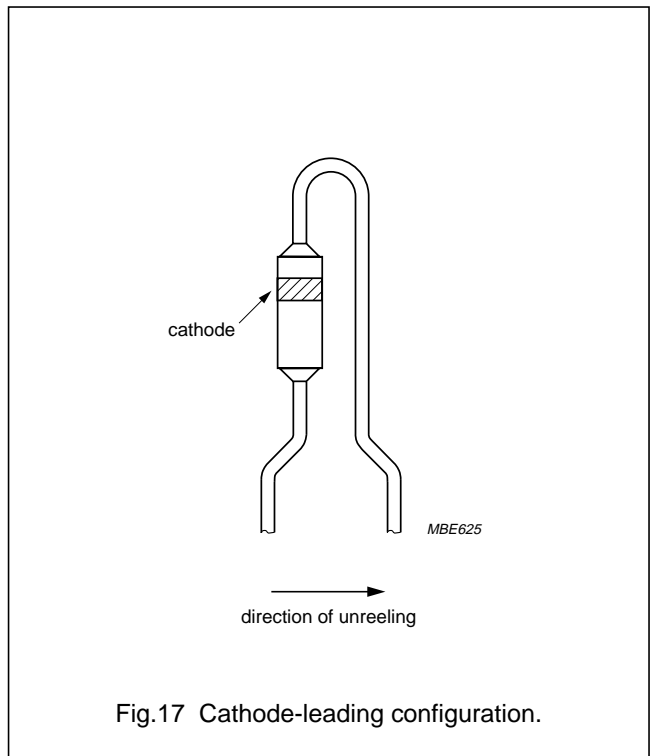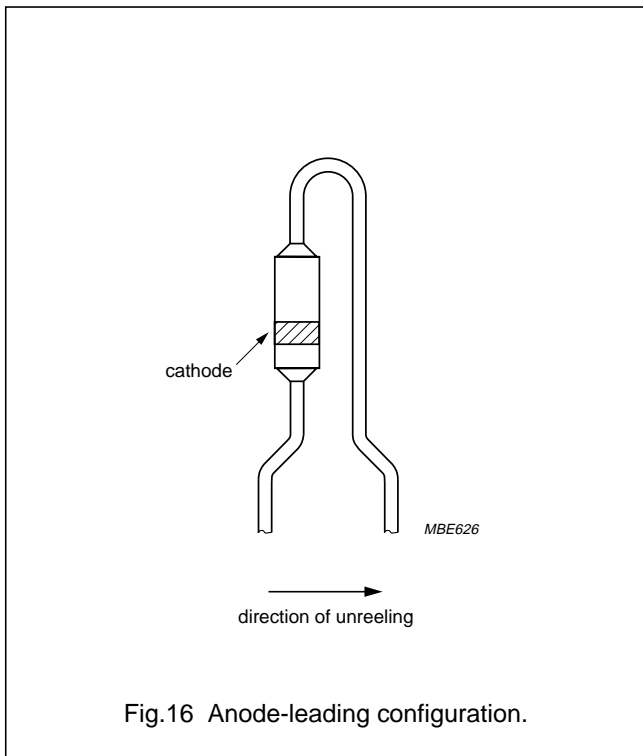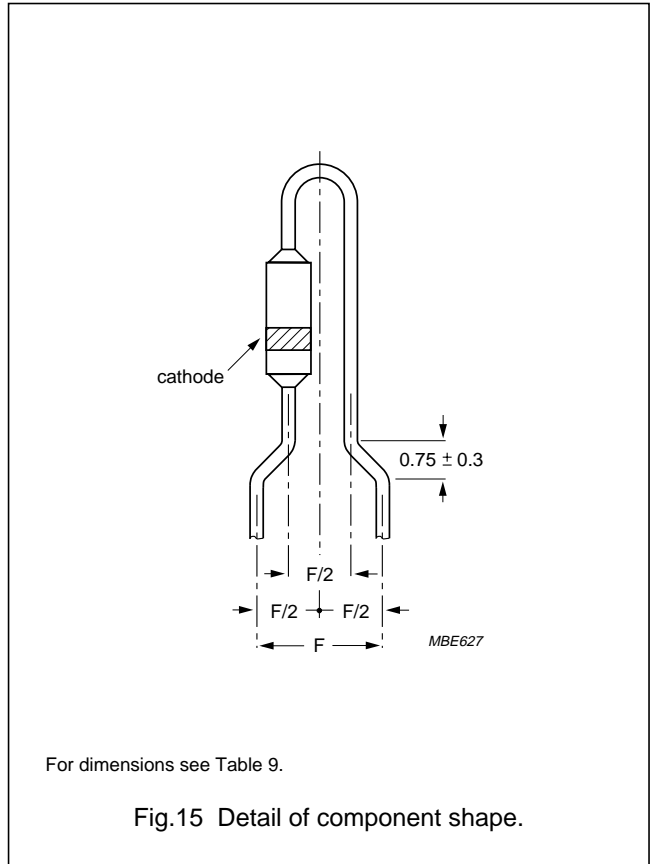

Small-signal and Medium-power Diodes

Packing and packing quantities

REEL SPECIFICATION

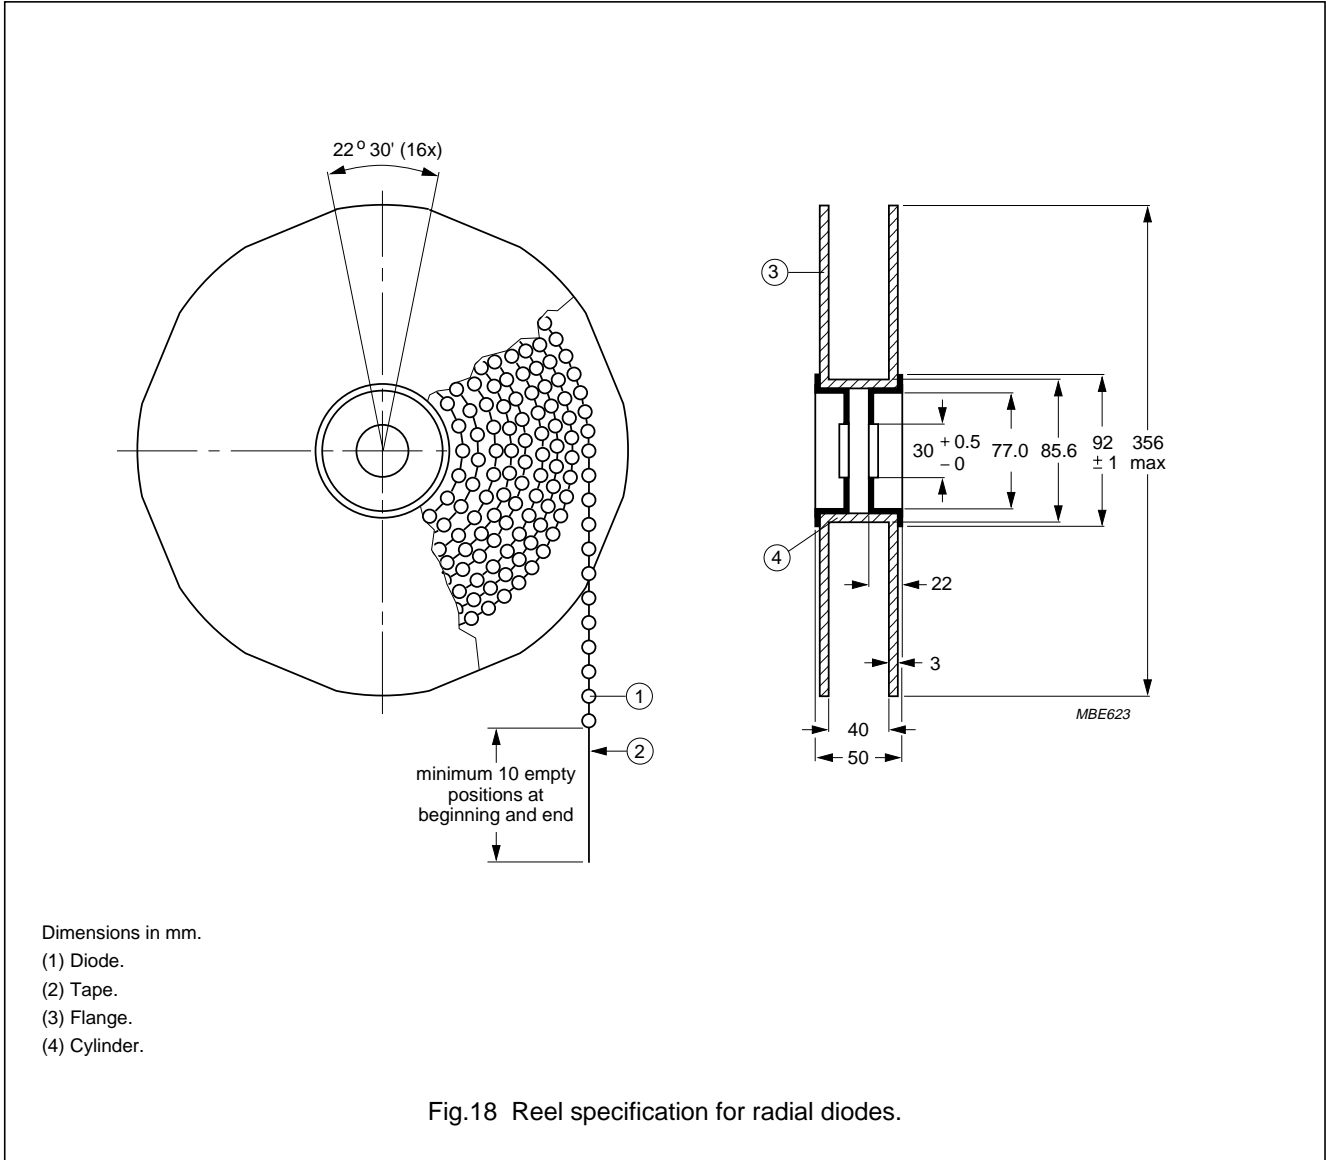

Small-signal and Medium-power Diodes

Packing and
packing quantities

Packing quantities

Table 10 Packing quantities per package with relevant ordering code

PACKAGE	PACKING QUANTITY	ORDERING CODE ENDING	KIND OF PACKING	REEL DIAM. or BOX SIZE (mm/inch)	REMARKS
SOD27 (DO-35)	10000	113	53 mm tape and reel	356/14	+ leading
	5000	116	37 mm radial tape and reel	356/14	
	10000	133	53 mm tape, ammopack	263 × 73 × 122	– leading small quantities
	5000	136	37 mm radial, tape and reel	356/14	
	5000	143	26 mm tape, ammopack	263 × 47 × 72	
	1000	153	53 mm tape, ammopack	138 × 73 × 29	
SOD57	5000	113	53 mm tape and reel	356/14	
	2500	133	53 mm tape, ammopack	263 × 73 × 87	
SOD61	5000	113	58 mm tape and reel	356/14	small quantities
	500	153	58 mm tape, blister	304 × 118 × 65	
SOD64	1500	112	bulk	304 × 118 × 65	preformed leads
	4000	113	53 mm tape and reel	356/14	
	2000	133	53 mm tape, ammopack	263 × 73 × 87	
SOD66 (DO-41)	5000	113	53 mm tape and reel	356/14	small quantities
	5000	133	53 mm tape, ammopack	263 × 73 × 122	
	500	153	53 mm tape, ammopack	138 × 73 × 29	
SOD68 (DO-34)	10000	113	53 mm tape and reel	356/14	+ leading
	5000	116	37 mm radial, tape and reel	356/14	
	10000	133	53 mm tape, ammopack	263 × 73 × 102	– leading small quantities
	5000	136	37 mm radial, tape and reel	356/14	
	5000	143	26 mm tape, ammopack	263 × 47 × 59	
	1000	153	53 mm tape, ammopack	138×73×29	
SOD81	5000	113	53 mm tape and reel	356/14	
	5000	133	53 mm tape, ammopack	263 × 73 × 87	
	5000	143	26 mm tape, ammopack	263 × 47 × 87	
SOD83A	2000	113	58 mm tape and reel	356/14	small quantities
	500	153	58 mm tape, blister	304 × 118 × 65	
SOD88A	5000	113	58 mm tape and reel	356/14	small quantities
	500	153	58 mm tape, blister	304 × 118 × 65	
SOD91	10000	113	53 mm tape and reel	356/14	
	10000	133	53 mm tape, ammopack	263 × 73 × 102	
	5000	143	26 mm tape, ammopack	263 × 47 × 72	
SOT18/15	5000	112	bulk, 1000 pieces per bag	not applicable	BAV45 only

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 微波元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-82884100 83397033 83396822 83398585

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382