



Standard Packages & High performance SC CUT Crystals

MODEL	OV41	OV51	OV101
FREQ' RANGE	5.00 to 100.00 MHz		
CRYSTAL CUT	SC		
FREQ' STABILITY VS. TEMPERATURE	See "How - To - Order" instructions Typical: ± 100 PPB , Best : ± 10 PPB		
LONG TERM STABILITY (AGING)	± 1 PPB Max. per day ± 100 PPB Max. per year		
OUTPUT WAVEFORM	See "How - To - Order" instructions		
LOAD	3 Gates for logic output 50 Ω for Sine Wave output		
FREQ' STABILITY VS. LOAD VARIATION	± 1 to 10 PPB Max. for $\pm 5\%$ variation		
SUPPLY VOLTAGE	See "How - To - Order" instructions		
FREQ' STABILITY VS. SUPPLY VARIATION	± 1 to 10 PPB Max. for $\pm 5\%$ variation		
SUPPLY POWER (AT 25° C)	Typical: 4.0W for warm-up 1.2W Max. at Steady State		
WARM UP TIME	Typical: To within ± 0.1 PPM from final frequency in 4 min @ 25°C		
FREQ' ADJUSTMENT RANGE	± 0.5 PPM to ± 2.0 PPM Typical by external voltage		
SLOPE	Positive		
LINEARITY	$\pm 0\%$ Max.		
REFERENCE VOLTAGE	Per customer requirement		
PHASE NOISE	Typical Offset: -115 dBc at 10 Hz -135 dBc at 100 Hz -140 dBc at 1 KHz -150 dBc at 10 KHz Available in different performance		
SHORT TERM STABILITY	5×10^{-11} (Allan variance at 1 sec.)		
G-SENSITIVITY	2 PPB/ g. Available also better performance		

Environmental Conditions

SHOCK

IEC 68-2-27 (Test Ea), 30G, 18 mSec, Half Sine

VIBRATION

IEC 68-2-6 (Test Fc), 0.35mm, 5G, 10-2000Hz, 6 cycles/ axis

THERMAL SHOCK


IEC 68-2-14 (Test Na), 30 min. in each extreme temperature

OV41, OV51, OV101

Package	H{ mm}
OV41	12
OV51	20
OV101	16

Pin	Function
1	V Control
2	Ref' Voltage
3	Sup' Voltage
4	RF Output
5	N.C
6	GND/CASE

Dimensions in mm.

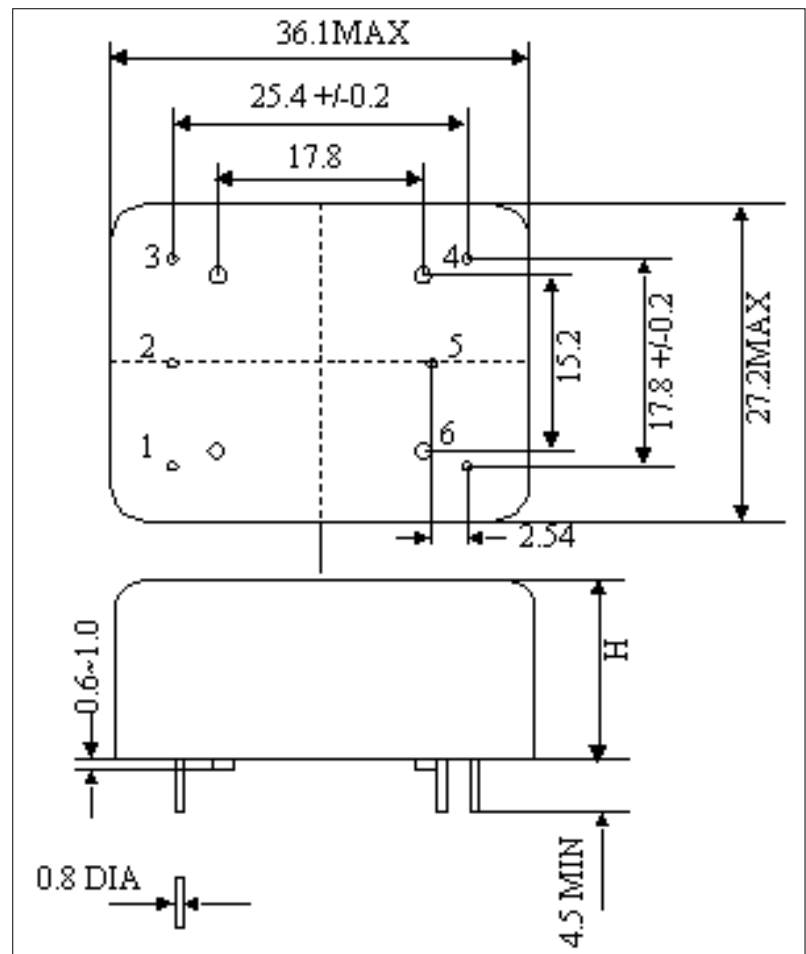

[Standard Packages & High performance SC CUT Crystals](#) [to top](#)



The authorized distributor in the Greater China Region