



# Panasonic

## ideas for life

**High sensitivity and low on-resistance.  
DIP (1 Form A) 6-pin type.**

**HF PhotoMOS  
(AQV10○, 20○)**

### FEATURES

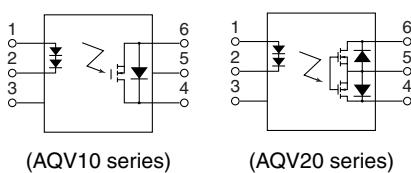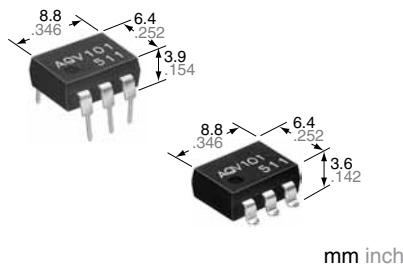

**RoHS Directive compatibility information**  
<http://www.mew.co.jp/ac/e/environment/>

**1. Controls low-level analog signals**

PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

**2. Controlled with low-level input signals**

**3. Controls various types of loads such as relays, motors, lamps and solenoids.**

**4. Optical coupling for extremely high isolation**

Unlike mechanical relays, the PhotoMOS relay combines LED and optoelectronic device to transfer signals using light for extremely high isolation.

**5. Eliminates the need for a counter electromotive force protection diode in the drive circuits on the input side**

**6. Stable on resistance**

**7. Low-level off state leakage current**

**8. Eliminates the need for a power supply to drive the power MOSFET**

A power supply used to drive the power MOSFET is unnecessary because of the built-in optoelectronic device. This results in easy circuit design and small PC board area.

**9. Low thermal electromotive force (Approx. 1 μV)**

### TYPICAL APPLICATIONS

- High-speed inspection machines
- Telephone equipment
- Data communication equipment
- Computer

### TYPES

**1. DC type (AQV10 types)**

| Output rating* |              | Part No.                       |                                |                                |                                | Packing quantity                                     |               |
|----------------|--------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--|---------------|
|                |              | Through hole terminal          |                                | Surface-mount terminal         |                                |  |               |
| Load voltage   | Load current | Tube packing style             |                                | Tape and reel packing style    |                                | Tube   | Tape and reel |
|                |              | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side |  |               |
| 40 V           | 700 mA       | AQV101                         | AQV101A                        | AQV101AX                       | AQV101AZ                       | 1 tube contains 50 pcs.<br>1 batch contains 500 pcs. | 1,000 pcs     |
| 60 V           | 600 mA       | AQV102                         | AQV102A                        | AQV102AX                       | AQV102AZ                       |  |               |
| 250 V          | 300 mA       | AQV103                         | AQV103A                        | AQV103AX                       | AQV103AZ                       |  |               |
| 400 V          | 180 mA       | AQV104                         | AQV104A                        | AQV104AX                       | AQV104AZ                       |  |               |

\*Indicate the peak AC and DC values.

Note: For space reasons, the package style indicator "X" or "Z" are not marked on the relay.

**2. AC/DC type (AQV20 types)**

| Output rating* |              | Part No.                       |                                |                                |                                | Packing quantity                                     |               |
|----------------|--------------|--------------------------------|--------------------------------|--------------------------------|--------------------------------|--|---------------|
|                |              | Through hole terminal          |                                | Surface-mount terminal         |                                |  |               |
| Load voltage   | Load current | Tube packing style             |                                | Tape and reel packing style    |                                | Tube   | Tape and reel |
|                |              | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side | Picked from the 1/2/3-pin side | Picked from the 4/5/6-pin side |  |               |
| 40 V           | 500 mA       | AQV201                         | AQV201A                        | AQV201AX                       | AQV201AZ                       | 1 tube contains 50 pcs.<br>1 batch contains 500 pcs. | 1,000 pcs     |
| 60 V           | 400 mA       | AQV202                         | AQV202A                        | AQV202AX                       | AQV202AZ                       |  |               |
| 250 V          | 200 mA       | AQV203                         | AQV203A                        | AQV203AX                       | AQV203AZ                       |  |               |
| 400 V          | 150 mA       | AQV204                         | AQV204A                        | AQV204AX                       | AQV204AZ                       |  |               |

\*Indicate the peak AC and DC values.

Note: For space reasons, the SMD terminal shape indicator "A" and the package style indicator "X" or "Z" are not marked on the relay.

# HF PhotoMOS (AQV10○, 20○)

## RATING

### 1. DC type (AQV10 types)

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                              | Symbol            | AQV101(A)                       | AQV102(A) | AQV103(A)                          | AQV104(A) | Remarks                        |  |
|-------------------------|------------------------------|-------------------|---------------------------------|-----------|------------------------------------|-----------|--------------------------------|--|
| Input                   | LED forward current          | I <sub>F</sub>    | 50 mA                           |           |                                    |           | f = 100 Hz, Duty factor = 0.1% |  |
|                         | LED reverse voltage          | V <sub>R</sub>    | 10 V                            |           |                                    |           |                                |  |
|                         | Peak forward current         | I <sub>FP</sub>   | 1 A                             |           |                                    |           |                                |  |
|                         | Power dissipation            | P <sub>in</sub>   | 150 mW                          |           |                                    |           |                                |  |
| Output                  | Load voltage (DC)            | V <sub>L</sub>    | 40 V                            | 60 V      | 250 V                              | 400 V     | 100 ms (1 shot)                |  |
|                         | Continuous load current (DC) | I <sub>L</sub>    | 0.7 A                           | 0.6 A     | 0.3 A                              | 0.18 A    |                                |  |
|                         | Peak load current            | I <sub>peak</sub> | 1.8 A                           | 1.5 A     | 0.6 A                              | 0.5 A     |                                |  |
|                         | Power dissipation            | P <sub>out</sub>  | 360 mW                          |           |                                    |           |                                |  |
| Total power dissipation |                              | P <sub>T</sub>    | 410 mW                          |           |                                    |           |                                |  |
| I/O isolation voltage   |                              | V <sub>iso</sub>  | 1,500 V (AC)                    |           |                                    |           |                                |  |
| Temperature limits      | Operating                    | T <sub>opr</sub>  | -40°C to +85°C -40°F to +185°F  |           | Non-condensing at low temperatures |           |                                |  |
|                         | Storage                      | T <sub>stg</sub>  | -40°C to +100°C -40°F to +212°F |           |                                    |           |                                |  |


2) Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                             |                 | Symbol            | AQV101(A) | AQV102(A) | AQV103(A) | AQV104(A)                                       | Condition   |  |
|----------------------------------|-----------------|-------------------|-----------|-----------|-----------|---|---|--|
| Input                            |                 | I <sub>Fon</sub>  | 2.3 mA    |           |           |   | I <sub>L</sub> = Max.   |  |
|                                  |                 |                   | 5 mA      |           |           |   |   |  |
| Output                           |                 | I <sub>Foff</sub> | 0.8 mA    |           |           |   | I <sub>L</sub> = Max.   |  |
|                                  |                 |                   | 2.2 mA    |           |           |   |   |  |
| Transfer characteristics         |                 | V <sub>F</sub>    | 2.3 V     |           |           |   | I <sub>F</sub> = 10 mA  |  |
|                                  |                 |                   | 3 V       |           |           |   |   |  |
| Output                           | On resistance   | R <sub>on</sub>   | 0.3 Ω     | 0.37 Ω    | 2.7 Ω     | 6.3 Ω   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.<br>Within 1 s on time |  |
|                                  |                 |                   | 0.5 Ω     | 0.7 Ω     | 4 Ω       | 8 Ω   |   |  |
| Off state leakage current        |                 | Maximum           | —         | 1 μA      |           | I <sub>F</sub> = 0 mA,<br>V <sub>L</sub> = Max. |   |  |
| Transfer characteristics         | Switching speed | T <sub>on</sub>   | 0.23 ms   | 0.22 ms   | 0.13 ms   | 0.09 ms   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.                       |  |
|                                  |                 |                   | 1 ms      |           |           |   |   |  |
|                                  | Turn off time*  | T <sub>off</sub>  | 0.07 ms   |           | 0.08 ms   |   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.                       |  |
|                                  |                 |                   | 1 ms      |           |           |   |   |  |
| I/O capacitance                  |                 | C <sub>iso</sub>  | 1.3 pF    |           |           |   | f = 1 MHz<br>V <sub>B</sub> = 0 V                                     |  |
| Initial I/O isolation resistance |                 |                   | 3 pF      |           |           |   |   |  |
| Initial I/O isolation resistance |                 | R <sub>iso</sub>  | 1,000 MΩ  |           | 500 V DC  |   |   |  |

Note: Recommendable LED forward current I<sub>F</sub> = 10 mA.

For type of connection.

\*Turn on/Turn off time

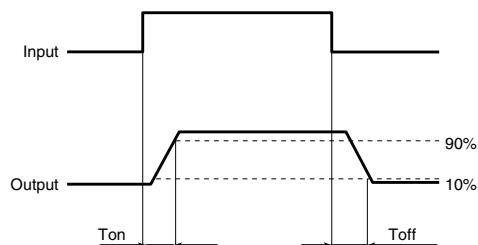

**2. AC/DC type (AQV20 types)**

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)

| Item                    |                         | Symbol            | Type of connection              | AQV201(A) | AQV202(A) | AQV203(A) | AQV204(A)                         | Remarks   |
|-------------------------|-------------------------|-------------------|---------------------------------|-----------|-----------|-----------|-----------------------------------|---|
| Input                   | LED forward current     | I <sub>F</sub>    |                                 | 50 mA     |           |           |                                   |   |
|                         | LED reverse voltage     | V <sub>R</sub>    |                                 | 10 V      |           |           |                                   |   |
|                         | Peak forward current    | I <sub>FP</sub>   |                                 | 1 A       |           |           |                                   | f = 100 Hz, Duty factor = 0.1%                      |
|                         | Power dissipation       | P <sub>in</sub>   |                                 | 150 mW    |           |           |                                   |   |
| Output                  | Load voltage (peak AC)  | V <sub>L</sub>    |                                 | 40 V      | 60 V      | 250 V     | 400 V                             |   |
|                         | Continuous load current | I <sub>L</sub>    | A                               | 0.5 A     | 0.4 A     | 0.2 A     | 0.15 A                            | A connection: Peak AC, DC<br>B, C connection: DC    |
|                         |                         |                   | B                               | 0.7 A     | 0.6 A     | 0.3 A     | 0.18 A                            |   |
|                         |                         |                   | C                               | 1.0 A     | 0.8 A     | 0.4 A     | 0.25 A                            |   |
|                         | Peak load current       | I <sub>peak</sub> |                                 | 1.8 A     | 1.5 A     | 0.6 A     | 0.5 A                             | A connection 100 ms (1 shot)<br>V <sub>L</sub> = DC |
|                         | Power dissipation       | P <sub>out</sub>  |                                 | 360 mW    |           |           |                                   |   |
| Total power dissipation |                         | P <sub>T</sub>    | 410 mW                          |           |           |           |                                   |   |
| I/O isolation voltage   |                         | V <sub>iso</sub>  | 1,500 V AC                      |           |           |           |                                   |   |
| Temperature limits      | Operating               | T <sub>opr</sub>  | −40°C to +85°C −40°F to +185°F  |           |           |           | Non-condensing at low temperature |   |
|                         | Storage                 | T <sub>stg</sub>  | −40°C to +100°C −40°F to +212°F |           |           |           |                                   |   |


## 2) Electrical characteristics (Ambient temperature: 25°C 77°F)

| Item                     |                                  | Symbol         | Type of connection | AQV201(A) | AQV202(A) | AQV203(A) | AQV204(A) | Remarks  |  |
|--------------------------|----------------------------------|----------------|--------------------|-----------|-----------|-----------|-----------|--|--|
| Input                    | LED operate current              | Typical        | I <sub>fon</sub>   | 2.4 mA    |           |           |           | I <sub>L</sub> = Max.  |  |
|                          |                                  | Maximum        |                    | 5 mA      |           |           |           |  |  |
|                          | LED turn off current             | Minimum        | I <sub>loff</sub>  | 0.8 mA    |           |           |           | I <sub>L</sub> = Max.  |  |
|                          |                                  | Typical        |                    | 2.2 mA    |           |           |           |  |  |
| Output                   | LED dropout voltage              | Typical        | V <sub>F</sub>     | 2.3 V     |           |           |           | I <sub>F</sub> = 10 mA   |  |
|                          |                                  | Maximum        |                    | 3 V       |           |           |           |  |  |
|                          |                                  | Typical        | R <sub>on</sub>    | A         | 0.6 Ω     | 0.74 Ω    | 5.5 Ω     | 12.4 Ω   |  |
|                          |                                  | Maximum        |                    | A         | 1 Ω       | 1.4 Ω     | 8 Ω       | 16 Ω   |  |
|                          | On resistance                    | Typical        | R <sub>on</sub>    | B         | 0.3 Ω     | 0.37 Ω    | 2.7 Ω     | 6.2 Ω  |  |
|                          |                                  | Maximum        |                    | B         | 0.5 Ω     | 0.7 Ω     | 4 Ω       | 8 Ω  |  |
| Transfer characteristics | Switching speed                  | Typical        | R <sub>on</sub>    | C         | 0.15 Ω    | 0.18 Ω    | 1.4 Ω     | 3.1 Ω  |  |
|                          |                                  | Maximum        |                    | C         | 0.25 Ω    | 0.35 Ω    | 2 Ω       | 4 Ω  |  |
|                          |                                  | Turn on time*  | T <sub>on</sub>    | —         | 0.38 ms   |           | 0.21 ms   | 0.18 ms  |  |
|                          |                                  | Turn off time* | T <sub>off</sub>   | —         | 1 ms      |           |           |  |  |
|                          | I/O capacitance                  | Typical        | C <sub>iso</sub>   | —         | 0.08 ms   |           | 0.07 ms   | I <sub>F</sub> = 10 mA<br>I <sub>L</sub> = Max.<br>f = 1 MHz<br>V <sub>B</sub> = 0 V |  |
|                          |                                  | Maximum        |                    | —         | 1 ms      |           |           |  |  |
|                          | Initial I/O isolation resistance | Minimum        | R <sub>iso</sub>   | —         | 1.3 pF    |           |           |  |  |
|                          |                                  |                |                    | —         | 3 pF      |           |           |  |  |
|                          |                                  |                |                    | —         | 1,000 MΩ  |           | 500 V DC  |  |  |

Note: Recommendable LED forward current I<sub>F</sub> = 10 mA.

For type of connection.

\*Turn on/Turn off time

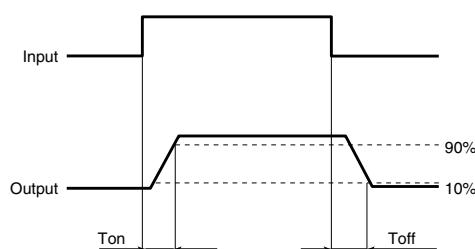


- For Dimensions.
- For Schematic and Wiring Diagrams.
- For Cautions for Use.

# HF PhotoMOS (AQV10○, 20○)

## REFERENCE DATA

### 1.-1 Load current vs. ambient temperature characteristics (DC type)


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

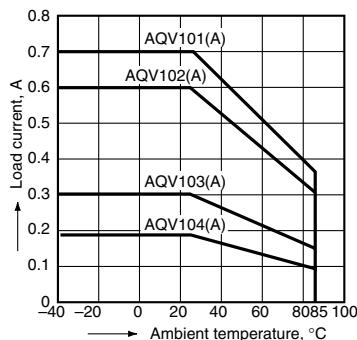

### 1.-2 Load current vs. ambient temperature characteristics (AC/DC type)


Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F

Type of connection: A

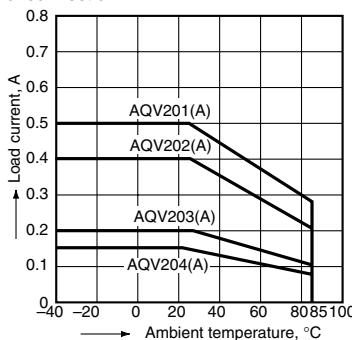


### 2.-1 On resistance vs. ambient temperature characteristics (DC type: AQV101, AQV102)

LED current: 10 mA;  
Continuous load current: Max. (DC)

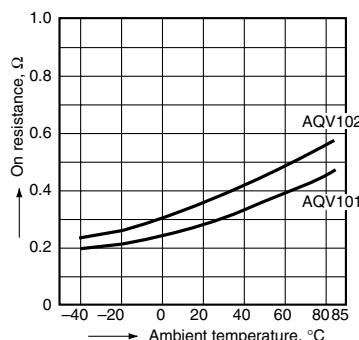


### 2.-2 On resistance vs. ambient temperature characteristics (DC type: AQV103, AQV104)

LED current: 10 mA;  
Continuous load current: Max. (DC)

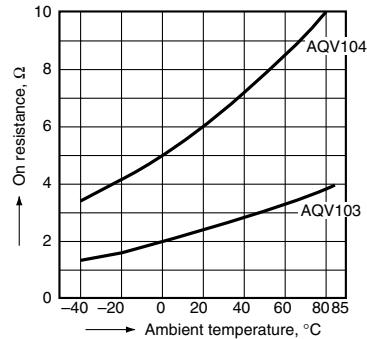


### 2.-3 On resistance vs. ambient temperature characteristics (AC/DC type: AQV201, AQV202)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

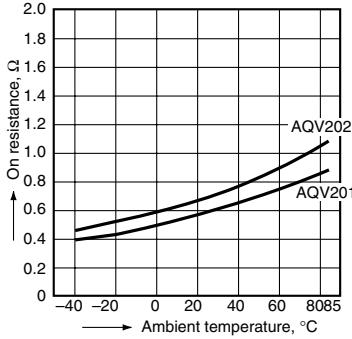


### 2.-4 On resistance vs. ambient temperature characteristics (AC/DC type: AQV203, AQV204)

Measured portion: between terminals 4 and 6;  
LED current: 10 mA;  
Continuous load current: Max. (DC)

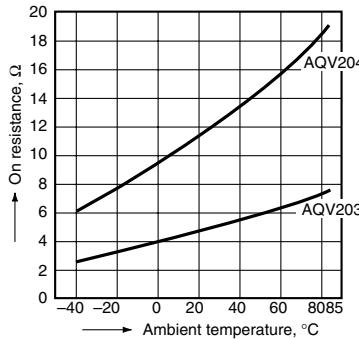


### 3.-1 Turn on time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

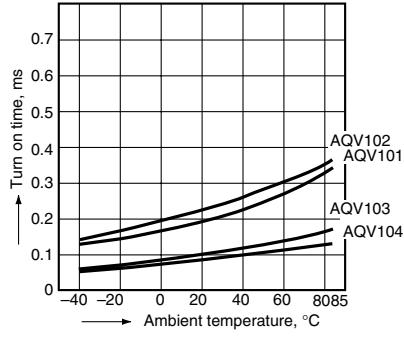


### 3.-2 Turn on time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

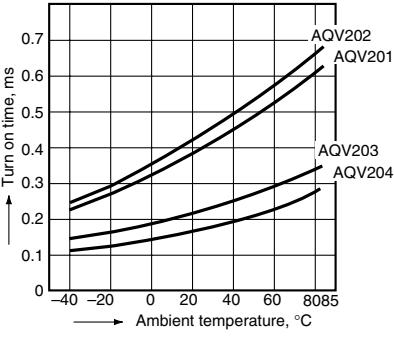


### 4.-1 Turn off time vs. ambient temperature characteristics (DC type)

LED current: 10 mA;  
Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

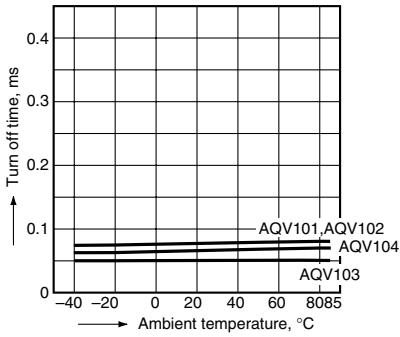


### 4.-2 Turn off time vs. ambient temperature characteristics (AC/DC type)

LED current: 10 mA; Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

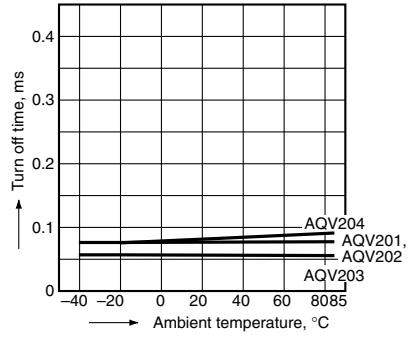


### 5.-1 LED operate/turn off current vs. ambient temperature characteristics (DC type)

Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

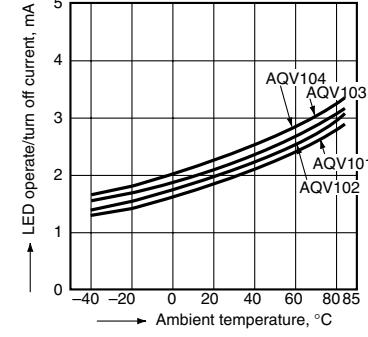


### 5.-2 LED operate/turn off current vs. ambient temperature characteristics (AC/DC type)


Load voltage: Max. (DC);  
Continuous load current: Max. (DC)

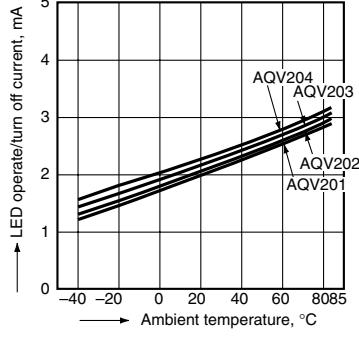


**6. LED dropout voltage vs. ambient temperature characteristics**  
 Sample: AQV202  
 LED current: 10 to 50 mA

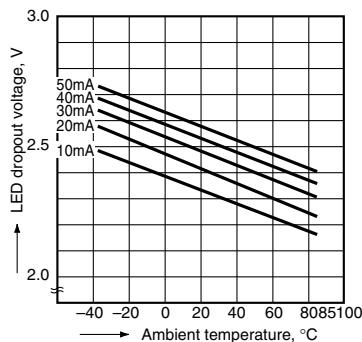


**8. Off state leakage current vs. load voltage characteristics**  
 Sample: AQV204;  
 Measured portion: between terminals 4 and 6;  
 Ambient temperature: 25°C 77°F

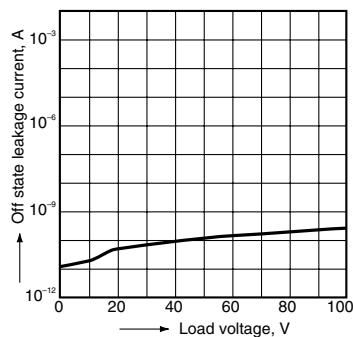


**10.-1) Turn off time vs. LED forward current characteristics (DC type)**  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F

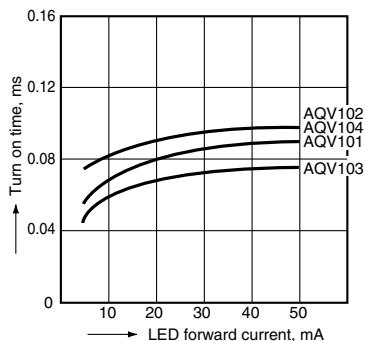


**11.-2) Output capacitance vs. applied voltage characteristics (AC/DC type)**  
 Measured portion: between terminals 4 and 6;  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

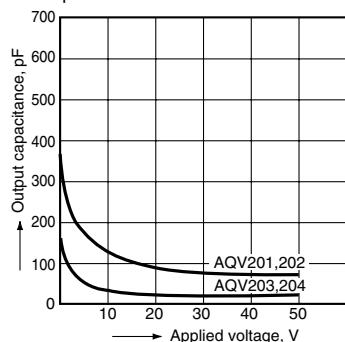


**7.-1) Current vs. voltage characteristics of output at MOS portion (DC type)**  
 Ambient temperature: 25°C 77°F

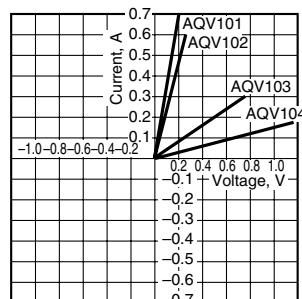


**7.-2) Current vs. voltage characteristics of output at MOS portion (AC/DC type)**  
 Measured portion: between terminals 4 and 6;  
 Ambient temperature: 25°C 77°F

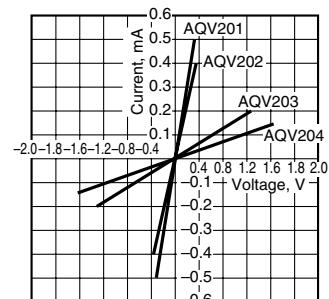


**9.-1) Turn on time vs. LED forward current characteristics (DC type)**  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F

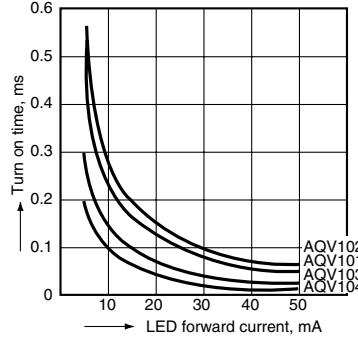

**10.-2) Turn off time vs. LED forward current characteristics (AC/DC type)**  
 Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F

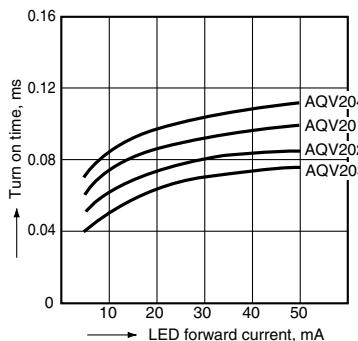

**9.-2) Turn on time vs. LED forward current characteristics (AC/DC type)**  
 Measured portion: between terminals 4 and 6;  
 Load voltage: Max. (DC);  
 Continuous load current: Max. (DC);  
 Ambient temperature: 25°C 77°F

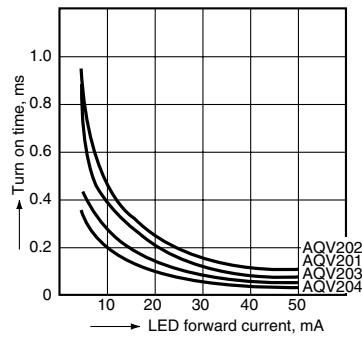

**11.-1) Output capacitance vs. applied voltage characteristics (DC type)**  
 Frequency: 1 MHz;  
 Ambient temperature: 25°C 77°F

