

Inductors

For Power Line

Axial

SP Series SP0508 Type

FEATURES

- These inductors feature low DC resistance and high current handling capacities, making them ideal for power supply line applications.
- These are coaxial horizontal types, highly miniaturized and lightweight.
- Available in ammo-pack style tape packaging to support automated mounting machines.

APPLICATIONS

Televisions, VCRs, personal computers, and other electronic equipment.

SPECIFICATIONS

Type	Inductance	Operating temperature range [Including self-temperature rise]	Storage temperature range [Unit of products]	Terminal tensile strength
SP0508	1 to 4700 μ H	-20 to +85°C	-40 to +85°C	24.5N min.

PRODUCT IDENTIFICATION

SP						
SPT	0508	A-	1R0	K	-3R8	-X
(1)	(2)	(3)	(4)	(5)	(6)	(7)

(1)Series name (Taping products are standard)

SP	Bulk
SPT	Taping

(2)Dimensions

0508	$\phi 4.5 \times 14$ mm
------	-------------------------

(3)Packaging style

A	Dimensions in between tapes 52mm
No code	Bulk

(4)Inductance value

1R0	1 μ H
101	100 μ H

(5)Inductance tolerance

K	$\pm 10\%$
---	------------

(6)Rated current

3R8	3.8A
R70	0.7A

(7)TDK internal code

(Some products may not have this number. See the main body for details).


PACKAGING STYLE AND QUANTITIES

Packaging style	Type	Quantity
Taping (Ammo-pack)	SPT0508A	1000 pieces/box
Bulk	SP0508	200 pieces/pack

COLOR CODE MARKINGS (from left)

- 1: The first effective number
- 2: The second effective number
- 3: Multiplier

SP0508 TYPE



Color code table

Color	Effective number	Multiplier	Inductance tolerance
Black	0	1	$\pm 20\%$
Brown	1	10	—
Red	2	100	—
Orange	3	1000	—
Yellow	4	—	—
Green	5	—	—
Blue	6	—	—
Purple	7	—	—
Gray	8	—	—
White	9	—	—
Silver	—	0.01	$\pm 10\%$
Gold	—	0.1	$\pm 5\%$

- According to JIS-C-0801


Inductors

For Power Line

Axial

SP Series SP0508 Type

SHAPES AND DIMENSIONS

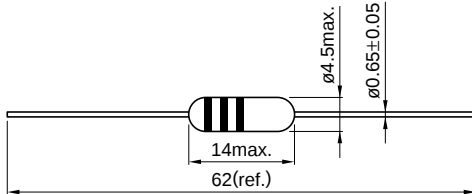

Dimensions in mm

CHARACTERISTICS

Operating temperature range	-20 to +85°C [Including self-temperature rise]
Storage temperature range	-40 to +85°C
Terminal bending strength	24.5N min.
Moisture resistance	$\Delta L/L \leq \pm 10\%$ $\Delta Q/Q \leq \pm 25\%$

ELECTRICAL CHARACTERISTICS

Inductance (μ H)	Inductance tolerance	Q min.	Test frequency L, Q (MHz)	Self- resonant frequency (MHz)ref.	DC resistance (Ω)max.	Rated current(mA)*max.		Part No.
						Based on inductance change	Based on temperature rise	
1	$\pm 10\%$	10	7.96	300	0.022	5600	3800	SP0508-1R0K3R8
1.2	$\pm 10\%$	10	7.96	260	0.024	5500	3700	SP0508-1R2K3R7
1.5	$\pm 10\%$	10	7.96	250	0.026	5000	3600	SP0508-1R5K3R6
1.8	$\pm 10\%$	10	7.96	240	0.029	4700	3100	SP0508-1R8K3R1
2.2	$\pm 10\%$	10	7.96	220	0.031	4500	2900	SP0508-2R2K2R9
2.7	$\pm 10\%$	10	7.96	195	0.034	4000	2700	SP0508-2R7K2R7
3.3	$\pm 10\%$	10	7.96	155	0.038	3400	2600	SP0508-3R3K2R6
3.9	$\pm 10\%$	10	7.96	115	0.04	3100	2500	SP0508-3R9K2R5
4.7	$\pm 10\%$	10	7.96	85	0.044	2800	2400	SP0508-4R7K2R4
5.6	$\pm 10\%$	10	7.96	55	0.048	2600	2100	SP0508-5R6K2R1
6.8	$\pm 10\%$	10	7.96	50	0.051	2400	2000	SP0508-6R8K2R0
8.2	$\pm 10\%$	10	7.96	38	0.056	2200	1950	SP0508-8R2K2R0
10	$\pm 10\%$	10	7.96	24	0.062	2100	1900	SP0508-100K1R9
12	$\pm 10\%$	10	2.52	18	0.076	1800	1800	SP0508-120K1R8
15	$\pm 10\%$	10	2.52	16	0.088	1700	1700	SP0508-150K1R7
18	$\pm 10\%$	10	2.52	15	0.11	1600	1600	SP0508-180K1R6
22	$\pm 10\%$	10	2.52	14	0.13	1400	1550	SP0508-220K1R4
27	$\pm 10\%$	10	2.52	13	0.14	1300	1300	SP0508-270K1R3
33	$\pm 10\%$	10	2.52	11	0.2	1200	1200	SP0508-330K1R2
39	$\pm 10\%$	10	2.52	10	0.22	1100	1000	SP0508-390K1R0
43	$\pm 10\%$	10	2.52	9.5	0.28	1000	950	SP0508-430K1R0
47	$\pm 10\%$	10	2.52	9.5	0.28	1000	950	SP0508-470KR95
56	$\pm 10\%$	10	2.52	8	0.3	900	900	SP0508-560KR90
68	$\pm 10\%$	10	2.52	7.5	0.34	800	800	SP0508-680KR80
82	$\pm 10\%$	10	2.52	7	0.385	700	750	SP0508-820KR70
100	$\pm 10\%$	10	2.52	6.5	0.48	700	700	SP0508-101KR70
120	$\pm 10\%$	15	0.796	5	0.595	600	600	SP0508-121KR60
150	$\pm 10\%$	15	0.796	4.5	0.9	550	500	SP0508-151KR50
180	$\pm 10\%$	15	0.796	4	1.1	500	400	SP0508-181KR40

* Rated current: Value obtained when current flows and the temperature has risen to 25°C or when DC current flows and the initial value of inductance has fallen by 10%, whichever is smaller.

- Product's part No. is changed as below by packaging style.
Bulk: SP0508-1R0K3R8, Taping (52mm): SPT0508A-1R0K3R8

- Test equipment
L: YHP4194A IMPEDANCE/GAIN-PHASE ANALYZER+HP16047D+TEST FIXTURE
Q: YHP4340A Q-METER(TF-A terminal)
SRF: HP8753C NETWORK ANALYZER+HP85047A S-PARAMETER TEST SET
Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER



Inductors

For Power Line
Axial

SP Series SP0508 Type

ELECTRICAL CHARACTERISTICS


Inductance (μH)	Inductance tolerance	Q min.	Test frequency L, Q (MHz)	Self-resonant frequency (MHz)ref.	DC resistance (Ω)max.	Rated current(mA)*max. Based on inductance change	Based on temperature rise	Part No.
220	±10%	15	0.796	3.8	1.25	440	390	SP0508-221KR39
270	±10%	15	0.796	3.5	1.85	420	330	SP0508-271KR33
330	±10%	15	0.796	3	2.1	380	310	SP0508-331KR31
390	±10%	15	0.796	2.8	2.28	340	300	SP0508-391KR30
470	±10%	15	0.796	2.5	3.22	320	280	SP0508-471KR28
560	±10%	15	0.796	2.2	3.85	290	270	SP0508-561KR27
680	±10%	15	0.796	2.1	4	260	240	SP0508-681KR24
820	±10%	15	0.796	2	5	250	230	SP0508-821KR23
1000	±10%	15	0.796	1.8	5.8	240	190	SP0508-102KR19
1200	±10%	15	0.252	1.6	7.1	200	180	SP0508-122KR18
1500	±10%	15	0.252	1.5	7.8	190	170	SP0508-152KR17
4700	±10%	50	0.252	0.7	30	120	100	SP0508-472KR10

* Rated current: Value obtained when current flows and the temperature has risen to 25°C or when DC current flows and the initial value of inductance has fallen by 10%, whichever is smaller.


- Product's part No. is changed as below by packaging style.
Bulk: SP0508-1R0K3R8, Taping (52mm): SPT0508A-1R0K3R8
- Test equipment
L: YHP4194A IMPEDANCE/GAIN-PHASE ANALYZER+HP16047D+TEST FIXTURE
Q: YHP4340A Q-METER (TF-A terminal)
SRF: HP8753C NETWORK ANALYZER+HP85047A S-PARAMETER TEST SET
Rdc: MATSUSHITA VP-2941A DIGITAL MILLIOHM METER

TYPICAL ELECTRICAL CHARACTERISTICS

INDUCTANCE CHANGE vs. DC SUPERPOSITION CHARACTERISTICS

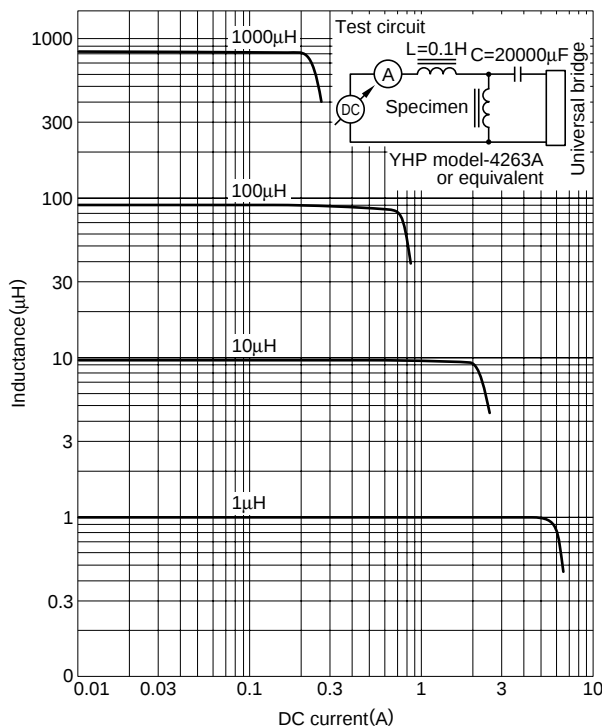

ATTENUATION vs. FREQUENCY CHARACTERISTICS

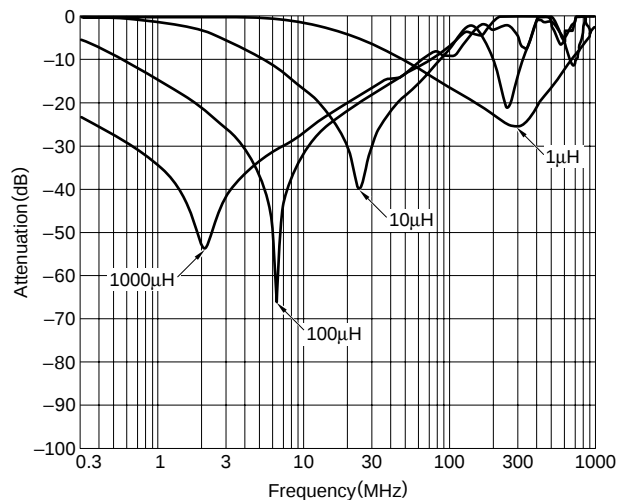

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/> 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382