


Agilent HCPL-T250

1.5 Amp Output Current IGBT Gate Drive Optocoupler

Data Sheet

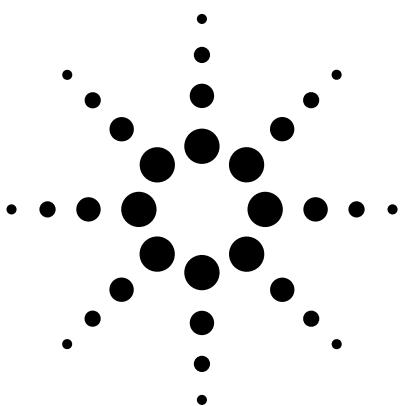


Description

The HCPL-T250 contains GaAs LED. The LED is optically coupled to an integrated circuit with a power output stage. This optocoupler is ideally suited for driving power IGBTs and MOSFETs used in motor control

inverter applications. The high operating voltage range of the output stage provides the drive voltages required by gate controlled devices. The voltage and current supplied by this optocoupler makes it ideally suited for directly driving IGBTs with ratings up to 1200 V/25 A. For IGBTs with higher ratings, the HCPL-T250 can be used to drive a discrete power stage which drives the IGBT gate.

Functional Diagram

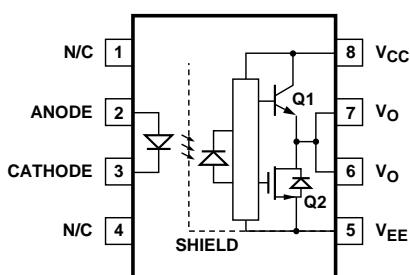

Truth Table

| LED | V _{out} |
|-----|------------------|
| ON | HIGH |
| OFF | LOW |

A 0.1 μ F bypass capacitor must be connected between pins 5 and 8.

Ordering Information

Specify Part Number followed by Option Number.

Example:

HCPL-T250 #XXXX

- No Option = Standard DIP Package, 50 per tube.
- 060 = IEC/EN/DIN EN 60747-5-2 VIORM = 630 V_{peak} Option, 50 per tube.
- 300 = Gull Wing Surface Mount Option, 50 per tube.
- 500 = Tape and Reel Packaging Option, 1000 per reel.
- XXXE = Lead Free Option


Remarks: The notation “#” is used for existing products, while (new) products launched since 15th July 2001 and lead free option will use “_”

CAUTION: It is advised that normal static precautions be taken in handling and assembly of this component to prevent damage and/or degradation which may be induced by ESD.




Agilent Technologies


Package Outline Drawings
Standard DIP Package

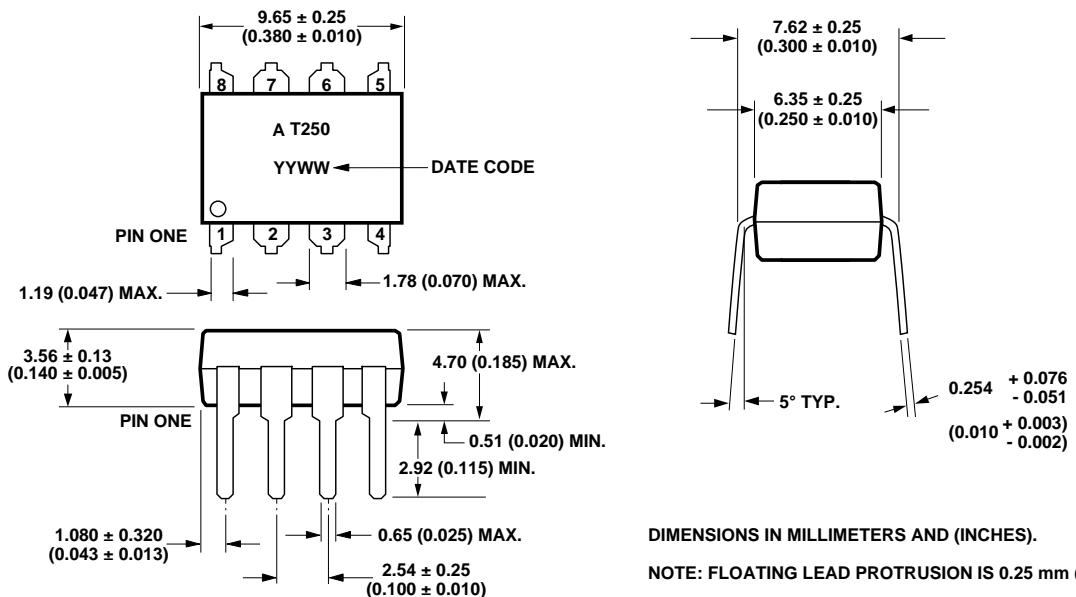


Gull Wing Surface Mount Option 300

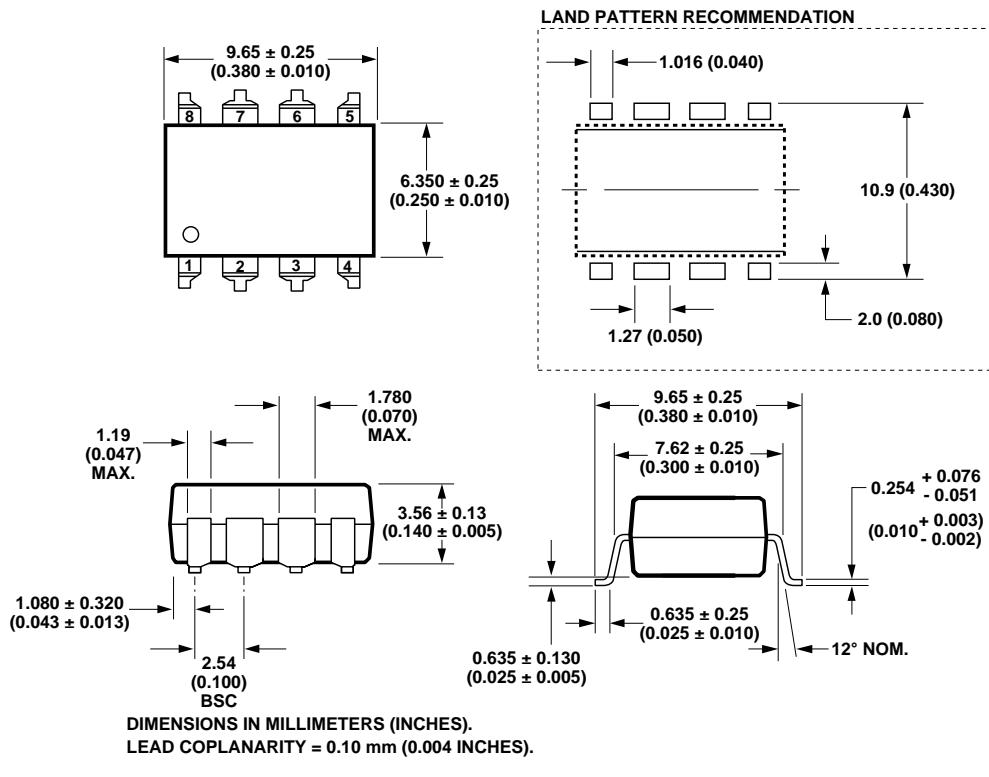

Solder Reflow Thermal Profile

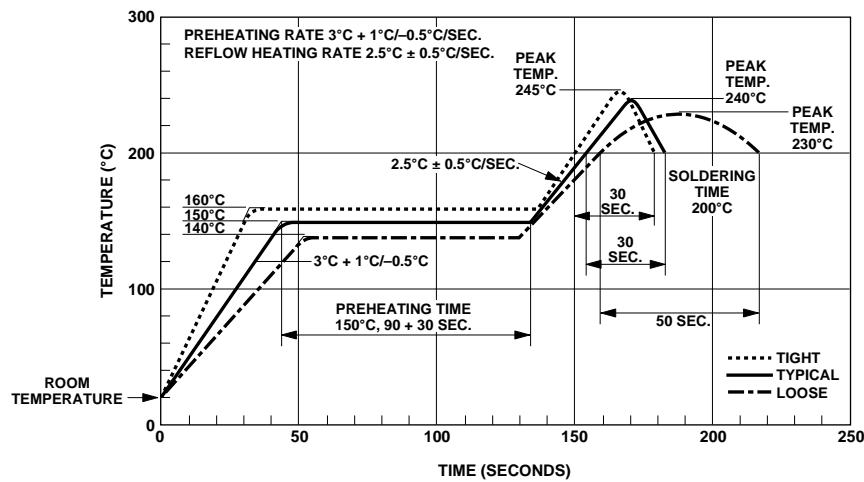

Recommended Pb-Free IR Profile

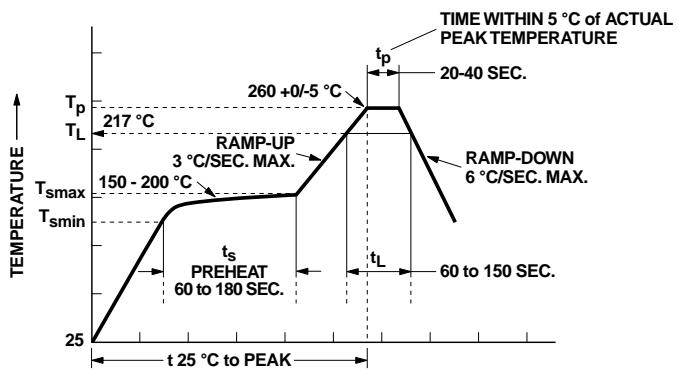

NOTES:

THE TIME FROM 25°C TO PEAK TEMPERATURE = 8 MINUTES MAX.

$T_{smax} = 200^{\circ}\text{C}$, $T_{smin} = 150^{\circ}\text{C}$

Regulatory Information

The HCPL-T250 has been approved by the following organizations:

UL

Recognized under UL 1577, Component Recognition Program, File E55361.

CSA

Approved under CSA Component Acceptance Notice #5, File CA 88324.

IEC/EN/DIN EN 60747-5-2

Approved under:
IEC 60747-5-2:1997 + A1:2002
EN 60747-5-2:2001 + A1:2002
DIN EN 60747-5-2 (VDE 0884 Teil 2):2003-01.
(Option 060 only)

Insulation and Safety Related

| Parameter | Symbol | Value | Units | Conditions |
|---|--------|-------|-------|---|
| Minimum External Air Gap (Clearance) | L(101) | 7.1 | mm | Measured from input terminals to output terminals, shortest distance through air. |
| Minimum External Tracking (Creepage) | L(102) | 7.4 | mm | Measured from input terminals to output terminals, shortest distance path along body. |
| Minimum Internal Plastic Gap (Internal Clearance) | | 0.08 | mm | Insulation thickness between emitter and detector; also known as distance through insulation. |
| Tracking Resistance (Comparative Tracking Index) | CTI | ≥175 | Volts | DIN IEC 112/VDE 0303 Part 1 |
| Isolation Group | | IIIa | | Material Group (DIN VDE 0110, 1/89, Table 1) |

Absolute Maximum Ratings (Compared with HCPL-3120)

| Parameter | Symbol | Units | HCPL-3120 Min. | HCPL-3120 Max. | HCPL-T250 Min. | HCPL-T250 Max. | Note |
|---|--------------------------------------|-------|---|-------------------|-------------------|-------------------|------|
| Operating Temperature | T _A | °C | -40 | 100 | -20 | 85 | |
| "High" Peak Output Current | I _{OH(Peak)} | A | | 2.5 | | 1.5 | 1 |
| "High" Peak Output Current | I _{OL(Peak)} | A | | 2.5 | | 1.5 | |
| Storage Temperature | T _S | °C | -55 | 125 | -55 | 125 | |
| Average Input Current | I _{F(Avg)} | mA | | 25 | | 20 | 2 |
| Peak Transient Input Current (<1 μs Pulse Width, 300 pps) | I _{F(TRAN)} | A | | 1.0 | | 1.0 | |
| Reverse Input Voltage | V _R | V | | 5 | | 5 | |
| Supply Voltage | (V _{CC} - V _{EE}) | V | 0 | 35 | 0 | 35 | |
| Output Voltage | V _O | V | 0 | V _{CC} | 0 | V _{CC} | |
| Output Power Dissipation | P _O | mW | | 250 | | 250 | 3 |
| Lead Solder Temperature | | | 260°C for 10 sec., 1.6 mm below seating plane | | | | |
| Solder Reflow Temperature Profile | | | See Package Outline Drawings section | | | | |

Notes:

1. Maximum pulse width = 10 μs, maximum duty cycle = 0.2%. See HCPL-3120 Applications section for additional details on limiting I_{OH(Peak)}.
2. Derate linearly above 70°C free-air temperature at a rate of 0.3 mA/°C.
3. Derate linearly above 70°C free-air temperature at a rate of 4.8 mW/°C.

Recommended Operating Conditions

| Parameter | Symbol | Min. | Max. | Units |
|----------------------|-------------------|------|------|-------|
| Power Supply Voltage | $V_{CC} - V_{EE}$ | 15 | 30 | V |
| Input Current (ON) | $I_{F(ON)}$ | 7 | 16 | mA |
| Input Voltage (OFF) | $V_{F(OFF)}$ | -3.0 | 0.8 | V |

DC Electrical Specifications (Compared with HCPL-3120)

Over recommended operating conditions ($I_{F(ON)} = 7$ to 16 mA, $V_{F(OFF)} = -3.0$ to 0.8 V, $V_{CC} = 15$ to 30 V, V_{EE} = Ground) unless otherwise specified.

| Parameter | Symbol | Units | HCPL-3120 | | | HCPL-T250 | | | Test Conditions | Note |
|--|---------------------------|------------------|--------------|----------------|----------------|--------------|----------------|----------------|--|------|
| | | | Min. | Typ.* | Max. | Min. | Typ.* | Max. | | |
| Input Forward Voltage | V_F | V | 1.2 | 1.5 | 1.8 | | 1.6 | 1.8 | $I_F = 10$ mA | |
| Temperature Coefficient of Forward Voltage | $\Delta V_F / \Delta T_A$ | mV/ $^{\circ}$ C | | -1.6 | | | -2.0 | | $I_F = 10$ mA | |
| Input Reverse Current | I_R | μ A | | | 10 | | | 10 | $V_R = 5$ V | |
| Input Capacitance | C_{IN} | pF | | 60 | | | 60 | 250 | $V_F = 0$ V, $F = 1$ MHz | |
| High Level Output Current | I_{OH} | A | 0.5 | 1.5 | | 0.5 | 1.5 | | $V_O = V_{CC} - 4$ V | |
| | | | 2.0 | | | N.A. | | | $V_O = V_{CC} - 15$ V | |
| Low Level Output Current | I_{OL} | A | 0.5 | 2.0 | | 0.5 | 2.0 | | $V_O = V_{CC} - 4$ V | |
| | | | 2.0 | | | N.A. | | | $V_O = V_{CC} - 15$ V | |
| High Level Output Voltage | V_{OH} | V | $V_{CC} - 4$ | $V_{CC} - 3$ | | $V_{CC} - 4$ | $V_{CC} - 3$ | | $I_0 = -100$ mA | |
| Low Level Output Voltage | V_{OL} | V | | $V_{EE} + 0.1$ | $V_{EE} + 0.5$ | | $V_{EE} + 0.8$ | $V_{EE} + 2.5$ | $I_0 = 100$ mA | |
| High Level Supply Currentnt | I_{CCH} | mA | | 2.0 | 5 | | 7 | 11 | Output Open $I_F = 7$ to 16 mA | |
| Low Level Supply Current | I_{CCL} | mA | | 2.0 | 5 | | 7.5 | 11 | Output Open $V_F = -3.0$ to +0.8 V | |
| Threshold Input Current Low to High | I_{FLH} | mA | | 2.3 | 5 | | 1.2 | 5 | $I_0 = 0$ mA, $V_O > 5$ V | |
| Threshold Input Voltage High to Low | V_{FHL} | V | 0.8 | | | 0.8 | | | | |
| Supply Voltage | V_{CC} | V | 15 | | 30 | 15 | | 30 | | |
| Capacitance (Input-Output) | C_{I-O} | pF | | 0.6 | | | 1.0 | | | |
| Resistance (Input-Output) | R_{I-O} | Ω | | 10^{12} | | | 10^{12} | | | |

*All typical values at $T_A = 25^{\circ}$ C and $V_{CC} - V_{EE} = 3$ V, unless otherwise noted.

Switching Specifications (AC) (Compared with HCPL-3120)

Over recommended operating conditions ($T_A = -40$ to 100°C , $I_{F(ON)} = 7$ to 16 mA , $V_{F(OFF)} = -3.0$ to 0.8 V , $V_{CC} = 15$ to 30 V , $V_{EE} = \text{Ground}$) unless otherwise specified.

| Parameter | Symbol | Units | HCPL-3120 (-40°C ~ 100°C) | | | HCPL-T250 (-20°C ~ 85°C) | | | Test Conditions | Note |
|---|------------------------------|-------------------------|------------------------------|-------|------|-----------------------------|-------|------|--|------|
| | | | Min. | Typ.* | Max. | Min. | Typ.* | Max. | | |
| Propagation Delay Time to High Output Level | t_{PHL} | μs | 0.1 | 0.27 | 0.5 | | 0.27 | 0.5 | $R_g = 10 \Omega$ $C_g = 10 \text{ nF}$, $f = 10 \text{ kHz}$, Duty Cycle = 50% | 4 |
| Propagation Delay Time to Low Output Level | T_{PLH} | μs | 0.1 | 0.3 | 0.5 | | 0.3 | 0.5 | | |
| Output Rise Time | t_R | μs | | 0.1 | | N.A. | | | | |
| Output Fall Time | t_F | μs | | 0.1 | | N.A. | | | | |
| Pulse Width Distortion | PWD | μs | | | 0.3 | | | N.A. | | |
| Propagation Delay Difference Between Any Two Parts | $(t_{PHL} - t_{PLH})$ PDD | μs | -0.35 | | 0.35 | N.A. | | N.A. | $T_A = 25^\circ\text{C}$ $V_{CC} = 30 \text{ V}$ HCPL-3120 $I_F = 10 \text{ mA}$ $V_{CM} = 1500 \text{ V}$ HCPL-T250 $I_F = 10 \text{ mA}$ $V_{CM} = 600 \text{ V}$ | 5 |
| Output High Level Common Mode Transient Immunity | $ CM_H $ | $\text{kV}/\mu\text{s}$ | 15 | 30 | | 5 | | | | |
| Output Low Level Common Mode Transient Immunity | $ CM_L $ | $\text{kV}/\mu\text{s}$ | 15 | 30 | | 5 | | | | |

*All typical values at $T_A = 25^\circ\text{C}$ and $V_{CC} - V_{EE} = 30 \text{ V}$, unless otherwise noted.

Notes:

- The difference between t_{PHL} and t_{PLH} between any two HCPL-3120 parts under the same test condition.
- Common mode transient immunity in the high state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in the high state (i.e., $V_0 > 15.0 \text{ V}$).
- Common mode transient immunity in a low state is the maximum tolerable dV_{CM}/dt of the common mode pulse, V_{CM} , to assure that the output will remain in a low state (i.e., $V_0 < 1.0 \text{ V}$).

www.agilent.com/semiconductors

For product information and a complete list of distributors, please go to our web site.

For technical assistance call:

Americas/Canada: +1 (800) 235-0312 or
(916) 788-6763

Europe: +49 (0) 6441 92460

China: 10800 650 0017

Hong Kong: (+65) 6756 2394

India, Australia, New Zealand: (+65) 6755 1939

Japan: (+81 3) 3335-8152 (Domestic/International), or 0120-61-1280 (Domestic Only)

Korea: (+65) 6755 1989

Singapore, Malaysia, Vietnam, Thailand,
Philippines, Indonesia: (+65) 6755 2044

Taiwan: (+65) 6755 1843

Data subject to change.

Copyright © 2004-2005 Agilent Technologies, Inc.

Obsoletes 5989-0797EN

October 5, 2005

5989-2144EN



Agilent Technologies

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

微波光电部专业代理经销高频、微波、光纤、光电元器件、组件、部件、模块、整机；电磁兼容元器件、材料、设备；微波 CAD、EDA 软件、开发测试仿真工具；微波、光纤仪器仪表。欢迎国外高科技微波、光纤厂商将优秀产品介绍到中国、共同开拓市场。长期大量现货专业批发高频、微波、卫星、光纤、电视、CATV 器件：晶振、VCO、连接器、PIN 开关、变容二极管、开关二极管、低噪晶体管、功率电阻及电容、放大器、功率管、MMIC、混频器、耦合器、功分器、振荡器、合成器、衰减器、滤波器、隔离器、环行器、移相器、调制解调器；光电子元器件和组件：红外发射管、红外接收管、光电开关、光敏管、发光二极管和发光二极管组件、半导体激光二极管和激光器组件、光电探测器和光接收组件、光发射接收模块、光纤激光器和光放大器、光调制器、光开关、DWDM 用光发射和接收器件、用户接入系统光光收发器件与模块、光纤连接器、光纤跳线/尾纤、光衰减器、光纤适配器、光隔离器、光耦合器、光环行器、光复用器/转换器；无线收发芯片和模组、蓝牙芯片和模组。

更多产品请看本公司产品专用销售网站：

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达消费电子产品网：[//www.icasic.com/](http://www.icasic.com/)

商斯达实业科技产品网：[//www.sunstars.cn/](http://www.sunstars.cn/) 射频微波光电元器件销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83396822 83397033 83398585 82884100

传真：0755-83376182 (0) 13823648918 MSN：SUNS8888@hotmail.com

邮编：518033 E-mail：szss20@163.com QQ：195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 D125 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382